
**Petroleum and natural gas
industries — Specific requirements
for offshore structures —**

**Part 10:
Marine geophysical investigations**

*Industries du pétrole et du gaz naturel — Exigences spécifiques
relatives aux structures en mer —*

Partie 10: Enquêtes géophysiques marines

Document Preview

ISO 19901-10:2021

<https://standards.iteh.ai/catalog/standards/iso/6ca6e29a-1496-4c23-8e4b-23067f472f1e/iso-19901-10-2021>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 19901-10:2021](https://standards.iteh.ai/catalog/standards/iso/6ca6e29a-1496-4c23-8e4b-23067f472f1e/iso-19901-10-2021)

<https://standards.iteh.ai/catalog/standards/iso/6ca6e29a-1496-4c23-8e4b-23067f472f1e/iso-19901-10-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	2
3 Terms and definitions	2
4 Symbols and abbreviated terms	12
4.1 Symbols	12
4.2 Abbreviated terms	13
5 Objectives, planning, and quality management	14
5.1 General	14
5.1.1 Objectives and project specifications	14
5.1.2 Georeferencing and GIS	15
5.1.3 Ground model	15
5.2 Desk study	16
5.2.1 General	16
5.2.2 Use of exploration 2D and 3D seismic data in a desk study	17
5.2.3 Desk study for pre-drilling well-site investigations	17
5.3 Scoping and planning	17
5.3.1 General	17
5.3.2 Scoping of seafloor mapping and sub-seafloor mapping	19
5.4 Operations planning and data quality management	22
5.4.1 Quality plan	22
5.4.2 Effects of attenuation	23
5.4.3 Data quality management	23
6 Positioning	23
6.1 General	23
6.2 Coordinate reference systems	24
6.2.1 Horizontal coordinate reference system	24
6.2.2 Vertical coordinate reference system	24
6.3 Surface positioning requirements	25
6.4 Vessel heading	25
6.4.1 General	25
6.4.2 Gyro compass	25
6.4.3 GNSS based heading reference	26
6.4.4 Alignment	26
6.5 Sub-sea positioning — Ultra-short baseline system	26
6.6 Inertial navigation system	27
6.7 Auxiliary sensor: doppler velocity log	27
6.8 Auxiliary sensor: altimeter	27
6.9 Auxiliary sensor: pressure-depth sensor	28
7 Seafloor mapping	28
7.1 General	28
7.2 Instrumentation and acquisition parameters	29
7.2.1 Multi-beam echo sounder	29
7.2.2 Side scan sonar	31
7.2.3 Auxiliary sensor: velocity of sound in seawater	31
7.3 Data acquisition methods	32
7.3.1 General	32
7.3.2 Reconnaissance seafloor mapping	32
7.3.3 Engineering seafloor mapping	33
7.3.4 Detailed engineering seafloor mapping	33
7.4 Seafloor mapping deliverables	33

8	Sub-seafloor mapping	34
8.1	General	34
8.1.1	Resolution and signal penetration	34
8.1.2	Equipment selection for sub-seafloor mapping methods	35
8.1.3	Assessment of data quality	35
8.1.4	Deliverables	36
8.2	Acquisition equipment and parameters for seismic data	36
8.2.1	Equipment performance	36
8.2.2	Acquisition and processing parameters	37
8.2.3	High resolution seismic reflection	40
8.2.4	Ultra-high-resolution seismic reflection	44
8.2.5	Ultra-ultra-high resolution seismic reflection	44
8.2.6	Sub-bottom profiling	45
8.3	Non-seismic reflection methods	46
8.3.1	Seismic refraction	46
8.3.2	Magnetometer and magnetic gradiometer	47
8.3.3	Marine shear waves	47
8.3.4	Marine surface waves	48
8.3.5	Electrical resistivity imaging	48
8.3.6	Electromagnetic imaging	48
9	Reporting of seafloor mapping and sub-seafloor mapping	48
9.1	General	48
9.2	Record of data acquisition operations	48
9.3	Record of data processing	49
9.4	Results report	49
10	Data integration, interpretation and investigation of geohazards	50
10.1	General	50
10.2	Horizons, isopachs and isochores	50
10.3	Mapping stratigraphic units and defining geochronology	50
10.4	Time-to-depth conversion	51
10.5	Borehole geophysical logging	51
10.6	Investigation of geohazards	52
10.7	Integrated studies	52
Annex A (informative) Additional information and guidance		53
Bibliography		78

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 67, *Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries*, Subcommittee SC 7, *Offshore structures*.

A list of all parts in the ISO 19901 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The general objective of a marine site investigation is to provide information about the seafloor, the sub-seafloor and geological processes affecting both, geohazards, and human-made objects at or below the seafloor. Marine site investigations can encompass both marine soil investigations and marine geophysical investigations, as shown in [Figure 1](#). This document provides requirements for marine geophysical investigations to support oil and gas developments offshore, is complementary to ISO 19901-8 on marine soil investigations, and provides guidance on the integration of both types of investigations.

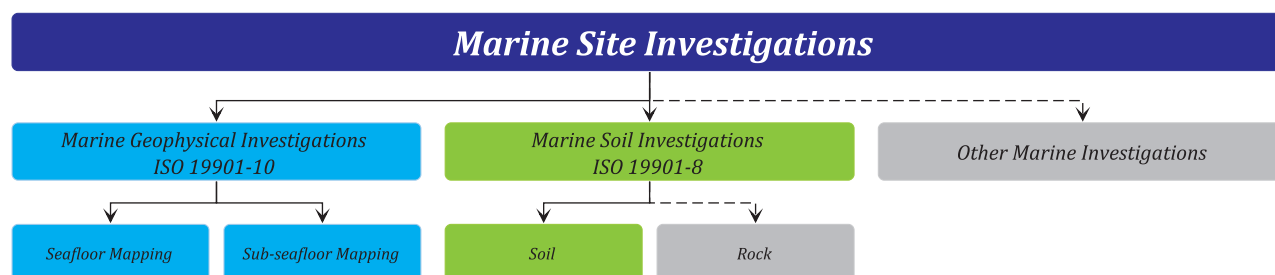


Figure 1 — Marine geophysical investigations as part of marine site investigations.

NOTE Subjects denoted in grey boxes in [Figure 1](#) are neither covered in ISO 19901-8 nor in this document. However, marine geophysical investigations can provide information about soils and rocks, whereas rocks are only covered by ISO 19910-8 to the extent that ordinary marine soil investigation tools can be used, e.g. for chalk.

Marine site investigations for a specific project can comprise both geophysical and geotechnical investigations, depending on project scale and complexity. It is common practice to conduct first a marine geophysical investigation, sometimes in combination with a limited marine soil investigation consisting of shallow soil sampling and/or in situ testing. A more extensive marine soil investigation is often conducted at a later stage. In some cases, a marine site investigation can consist solely of a stand-alone geophysical survey that has a specific and limited purpose. A marine site investigation can also consist solely of a stand-alone marine soil investigation, for which details on soil investigation equipment and procedures are provided in ISO 19901-8.

Particular objectives of a marine geophysical investigation should be addressed in project specifications, which should specify desired investigation depths, desired resolutions (horizontal and vertical), and whether the objective is to illuminate the seafloor and/or the sub-seafloor. Caution is necessary in the selection of the type of equipment to be used, and operational parameters for that equipment, in order to meet those desired depths, resolutions, and illumination targets, particularly because local site conditions can affect the abilities of certain equipment to meet those objectives. This document includes discussion of the selection and operation of appropriate geophysical equipment.

Marine geophysical investigations and marine soil investigations can be (and often are) carried out as separate exercises, the results of which can be integrated into a ground model. This document applies to critical stages in the development of a ground model, from the initial conception stage through successive stages of increased detail.

In this document, the following verbal forms are used:

- “shall” indicates a requirement;
- “should” indicates a recommendation;
- “can” indicates a possibility or a capability;
- “may” indicates a permission.

[Annex A](#) provides additional information intended to assist the understanding or use of this document.

Petroleum and natural gas industries — Specific requirements for offshore structures —

Part 10: Marine geophysical investigations

1 Scope

This document provides requirements and guidelines for marine geophysical investigations. It is applicable to operators/end users, contractors and public and regulatory authorities concerned with marine site investigations for offshore structures for petroleum and natural gas industries.

This document provides requirements, specifications, and guidance for:

- a) objectives, planning, and quality management;
- b) positioning;
- c) seafloor mapping, including instrumentation and acquisition parameters, acquisition methods, and deliverables;
- d) sub-seafloor mapping, including seismic instrumentation and acquisition parameters, and non-seismic-reflection methods;
- e) reporting;
- f) data integration, interpretation, and investigation of geohazards.

This document is applicable to investigation of the seafloor and the sub-seafloor, from shallow coastal waters to water depths of 3 000 m and more. It provides guidance for the integration of the results from marine soil investigations and marine geophysical investigations with other relevant datasets.

NOTE 1 The depth of interest for sub-seafloor mapping depends on the objectives of the investigation. For offshore construction, the depths of investigation are typically in the range 1 m below seafloor to 200 m below seafloor. Some methods for sub-seafloor mapping can also achieve much greater investigation depths, for example for assessing geohazards for hydrocarbon well drilling.

There is a fundamental difference between seafloor mapping and sub-seafloor mapping: seafloor signal resolution can be specified, while sub-seafloor signal resolution and penetration cannot. This document therefore contains requirements for the use of certain techniques for certain types of seafloor mapping and sub-seafloor mapping (similarly, requirements are given for certain aspects of data processing). If other techniques can be shown to obtain the same information, with the same or better resolution and accuracy, then those techniques may be used.

Mapping of pre-drilling well-site geohazards beneath the seafloor is part of the scope of this document.

NOTE 2 This implies depths of investigation that are typically 200 m below the first pressure-containment casing string or 1 000 m below the seafloor, whichever is greatest. Mapping of pre-drilling well-site geohazards is therefore the deepest type of investigation covered by this document.

In this document, positioning information relates only to the positioning of survey platforms, sources and receivers. The processes used to determine positions of seafloor and sub-seafloor data points are not covered in this document.

Guidance only is given in this document for the use of marine shear waves ([A.8.3.3](#)), marine surface waves ([A.8.3.4](#)), electrical resistivity imaging ([A.8.3.5](#)) and electromagnetic imaging ([A.8.3.6](#)).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19901-8, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 8: Marine soil investigations*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

abyssal water

water depths greater than 3 000 m

3.2

acoustic impedance

seismic velocity multiplied by density

Note 1 to entry: Compressional-wave impedance uses compressional-wave velocity, and shear-wave impedance uses shear-wave velocity.

3.3

acoustic noise

unwanted acoustic signal

3.4

active tail buoy

buoy fitted with a global navigation satellite system transponder attached to the end of a streamer

3.5

airgun

seismic source that injects a bubble of highly compressed air into the water

Note 1 to entry: Whereas single airguns can be used, it is common practise to deploy and fire several airguns in arrays to produce an acoustic pulse that has certain temporal and spatial characteristics.

3.6

aliasing

effect that causes signals to be misrepresented in recorded data as a result of undersampling

Note 1 to entry: Undersampling can be in time or spatial domain.

3.7

anisotropy

dependence of velocity on direction or upon angle of wave propagation

3.8

array

system of linked hydrophones or seismic sources arranged in a geometric pattern to increase sensitivity and/or directionality and/or in the case of a seismic source, the pulse characteristics

3.9**attenuation**

reduction in amplitude or energy

Note 1 to entry: Attenuation in seismic data is related in part to soil conditions.

3.10**attribute**

characteristic of a given object, structure or feature

Note 1 to entry: A seismic attribute is a quantity or property derived or extracted from seismic data that provides specific information contained within the data as an aid in interpretation.

3.11**backscatter**

amplitude of echo sounder energy reflected by the seafloor that can be processed into information about seafloor features and texture

3.12**bandwidth**

range of frequencies in an acoustic signal between the two half power points

Note 1 to entry: This corresponds with the frequencies at which the power drops to half the peak power (3 dB).

3.13**boomer**

seismic source that operates by the rapid movement of a restricted metal plate

3.14**chirp**

type of sub-bottom profiler that emits a frequency-modulated pulse of acoustic energy over a specified range of frequencies

3.15**common depth point**

CDP
common reflection point at depth on a reflector, or the halfway point when a wave travels from a source to a reflector to a receiver

Note 1 to entry: In the case of flat layers, the common depth point is vertically below the common mid-point.

3.16**common mid-point****CMP**

in multichannel seismic acquisition, the point on the surface halfway between the source and receiver that is shared by a number of source-receiver pairs

Note 1 to entry: CMP gather refers to the set of traces that have a common mid-point.

3.17**common reference point**

datum point on a vessel to which all positioning systems are referenced in three dimensions

3.18**cone penetration test****CPT****CPTU**

in situ soil strength testing device that makes direct measurements of cone resistance, sleeve friction and pore pressure response as it is pushed into the sub-seafloor

Note 1 to entry: See ISO 19901-8.

3.19

contractor

party or person responsible for an assigned scope of work described in project specifications

3.20

coordinate reference system

coordinate system that is related to an object by a datum

Note 1 to entry: Geodetic and vertical datums are referred to as reference frames.

Note 2 to entry: For geodetic and vertical reference frames, the object will be the Earth. In planetary applications, geodetic and vertical reference frames can be applied to other celestial bodies.

[SOURCE: ISO 19111:2019, 3.1.9]

3.21

deconvolution

filtering process that undoes the effect of another filter

Note 1 to entry: There are many applications in seismic data processing. One example is removing the filtering effect of the sub-seafloor.

3.22

deep water

water depths between 750 and 1 800 m

3.23

demultiple

seismic processing application that attenuates multiple energy

3.24

designature

filtering process to compensate for the non-minimum phase characteristics of a seismic source

3.25

digital terrain model

DTM

digital representation of a mapped surface usually defined by xyz values for defined cells

3.26

dip move-out

DMO

difference in the arrival times or travel times of a reflected wave, measured by receivers at two different offset locations, that is produced from dipping reflectors

Note 1 to entry: Dip move-out can be compensated for in processing.

3.27

direct arrival

recorded seismic energy that has travelled directly from source to receiver and has neither been reflected nor refracted

3.28

doppler velocity log

DVL

instrument to measure the speed of a survey platform by measuring the frequency shift of acoustic pulses reflected from the seafloor

3.29

dynamic range

ratio of the largest recoverable signal to the smallest recoverable signal

3.30**exploration seismic data**

seismic data containing frequencies between 0 Hz and 100 Hz, typically acquired for the purpose of exploring for oil and gas rather than site investigation

Note 1 to entry: In this document, “exploration seismic data” also includes data acquired for the purposes of hydrocarbon reservoir management (assessment, development, and monitoring).

3.31**far-field source signature**

characteristic wave shape of a particular seismic source recorded at a remote distance, so that the wave front is close to a straight line

Note 1 to entry: In practice this is difficult to achieve, and a mid-field source signature is more common.

3.32**feather angle**

angle between the line connecting the near and far receivers of a streamer and course made good of the nearest receiver

Note 1 to entry: Differences are caused by a cross current.

3.33**feature**

item observed in seafloor mapping data or sub-seafloor mapping data that characterizes the site or renders it unique

Note 1 to entry: A featureless seafloor is completely smooth and flat, for example.

3.34**first break**

first recorded signal attributable to seismic-wave travel from a known source

3.35**first pressure containment string**

first casing installed in a well that will enable the pressure inside the well to be controlled

3.36**frequency spectrum**

function of power versus frequency that illustrates the frequency content of a wavelet or signal

Note 1 to entry: A frequency spectrum is produced by a Fourier transform.

3.37**Fresnel zone**

generally circular area on a reflecting interface from which all reflections contribute to the recorded signal

Note 1 to entry: The Fresnel zone is dependent on the period of the wave and determines lateral resolution.

3.38**geohazard**

geological condition that has the potential to have adverse effects on persons, operations, infrastructure or the environment

3.39**geological model**

explanation of geological conditions

3.40

ghost

spurious seismic reflection that occurs when energy is reflected between sources and/or receivers and the sea surface

3.41

global navigation satellite system

GNSS

satellite based navigation system that provides autonomous global positioning of a receiving device

Note 1 to entry: Global positioning system (GPS), and global navigation satellite system (Glonass), Galileo and BeiDo are typical examples of global navigation satellite systems.

3.42

ground model

2- or 3-dimensional representation of the seafloor (bathymetry) and, where applicable, the sub-seafloor conditions, at a given time, that is specific to the offshore structure(s) considered

3.43

ground-truthing

integration of seafloor or sub-seafloor geophysical data with data acquired by marine soil investigation and other data
Note 1 to entry: See, for example, ISO 19901-8 for marine soil investigation data.

3.44

high-resolution seismic

HR seismic

seismic reflection method that acquires seismic data containing frequencies between 75 Hz and 300 Hz

3.45

horizon

seismic reflector associated with the surface separating two strata

3.46

hydrophone

sensor that detects variations in pressure

3.47

inertial navigation system

navigation aid that uses accelerometers and gyroscopes to continuously calculate position, orientation and velocity by dead reckoning without external input

3.48

interval velocity

seismic velocity measured over a depth interval

3.49

isochore

line drawn on a map through points of equal vertical thickness of a soil unit, bed, formation or group of these

3.50

isochron

line drawn on a map through points at which a characteristic reflection time or interval has the same value

3.51

isopach

line drawn on a map through points of equal stratigraphic thickness of a sub-seafloor stratum or a group of these

3.52**magnetic gradiometer**

system which measures magnetic gradient using two or more closely spaced magnetometers

3.53**magnetometer**

instrument used to measure the strength and/or direction of a magnetic field

3.54**marine geophysical investigation**

type of marine site investigation of seafloor or sub-seafloor that uses non-destructive methods involving marine deployment of geophysical tools

3.55**marker horizon**

seismic reflector that maintains its characteristics over an area or distance so that it can be used as an interpretation reference

3.56**metadata**

metacontent

information describing the content and context of the data within the given file or format

3.57**migration**

seismic data processing step in which seismic events are geometrically re-located to the true location at which the event occurs in the sub-seafloor rather than the location at which it was recorded at the surface

Note 1 to entry: A more accurate image of the sub-seafloor will be created by applying migration.

3.58**motion reference unit****MRU**

instrument for measuring pitch, roll, yaw, surge, sway and heave

Note 1 to entry: The primary use is to provide observations needed to correctly determine the position of geophysical sensors and in the processing of the sensor data.

3.59**multiple energy**

noise on seismic records caused by reverberations between strong reflecting interfaces, such as the seafloor and the sea surface

3.60**mute**

removal of certain components of traces prior to common mid-point stacking

3.61**near-field signature**

pulse shape measured within the near-field range of a seismic source, generally less than 1 wavelength

3.62**noise**

unwanted signal

3.63**normal moveout****NMO**

variation in reflection arrival time caused by variation in seismic source to receiver (offset) distance

3.64

offset

horizontal distance from the seismic source to the seismic receiver

3.65

offset well

existing well from which information is available to tie back to and assist with making predictions about conditions at another well location

3.66

penetration

greatest depth below seafloor from which geophysical signals (such as seismic reflections) can be recognized with reasonable certainty

3.67

pinger

transducer or array of transducers using piezo-electric effects used as seismic source in sub-bottom profiling profilers

3.68

pitch

up-and-down motion of the bow or stern of a survey platform about the horizontal axis that passes across it from port to starboard through its centre of gravity

3.69

positioning

process to derive a three-dimensional coordinate, which uniquely defines a location within the project coordinate reference system, that should include the time of the observations used to derive the coordinate

3.70

pre-stack depth migration

PSDM

migration applied to seismic data in depth domain, calculated from seismic data in time coordinates, and applied before the data is stacked

3.71

pre-stack time migration

PSTM

migration applied to seismic data in time domain before it is stacked

3.72

project specification

scope of work for marine site investigation assigned by the client to a contractor

3.73

P-wave

primary wave

elastic body wave in which the particle motion is in the direction of propagation

3.74

reflection

energy or wave from a seismic source which has been reflected or returned from an acoustic impedance contrast

3.75

refraction

change in the direction of travel of a wavefront, or the bending of a ray, as it passes from one medium to another, expressed mathematically by Snell's law