## DRAFT INTERNATIONAL STANDARD ISO/DIS 6195

ISO/TC **131**/SC **7** Secretariat: **JISC** 

Voting begins on: Voting terminates on:

2020-08-03 2020-10-26

## Fluid power systems and components — Cylinder-rod wiper-ring housings in reciprocating applications — Dimensions and tolerances

Transmissions hydrauliques et pneumatiques — Logements de joints racleurs pour tiges de piston à mouvement linéaire de vérins — Dimensions et tolérances

ICS: 23.100.20

### iTeh STANDARD PREVIEW (standards.iteh.ai)

**ISO/DIS 6195** 

https://standards.iteh.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-92522cfaf459/iso-dis-6195

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number ISO/DIS 6195:2020(E)

### iTeh STANDARD PREVIEW (standards.iteh.ai)

**ISO/DIS 6195** 

https://standards.iteh.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-92522cfaf459/iso-dis-6195



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Co	Contents	
For	reword	iv
Intr	roduction	v
1	Scope	1
2	Normative references	2
3	Terms and definitions	
4	Letter symbols	2
5	General	3
6	Requirements for housings	3
7	Other requirements regarding dimensions	14
8	Surface roughness	14
9	Identification statement	15
Bib	oliography	16

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 6195

https://standards.iteh.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-92522cfaf459/iso-dis-6195

### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards are normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electro-technical Commission (IEC) on all matters of electro-technical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document is drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see <a href="www.iso.org/directives">www.iso.org/directives</a>).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see <a href="https://www.iso.org/patents">www.iso.org/patents</a>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see the following URL: <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 131, Fluid power systems and components, Subcommittee SC 7, Sealing Devices. ISO/DIS 6195 https://standards.tich.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-

This fourth edition cancels and replaces the third edition (ISO 16915:2013), which has been technically revised to ensure consistency with ISO 3320.

The main changes compared to the previous edition are as follows:

— wiper housing sizes for 400 mm and 450 mm rod diameters added to <u>Tables 1, 2, 3, 4</u> and <u>5</u>.

Any feedback, or questions on this document, should be directed to the user's national standards body. A complete listing of these bodies can be found at <a href="https://www.iso.org/members.html">www.iso.org/members.html</a>.

### Introduction

In fluid power systems, power is transmitted, and controlled, through a fluid (liquid or gas) under pressure within an enclosed circuit. Wiper rings are used to prevent ingress of contaminants and thereby to protect the seals and bearings within the equipment.

This document is one of a series of standards covering dimensions and tolerances of reciprocating seal housings.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 6195 https://standards.iteh.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-92522cfaf459/iso-dis-6195

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 6195

https://standards.iteh.ai/catalog/standards/sist/77b9e884-4ee3-4634-a697-92522cfaf459/iso-dis-6195

# Fluid power systems and components — Cylinder-rod wiper-ring housings in reciprocating applications — Dimensions and tolerances

### 1 Scope

This document specifies dimensions and tolerances of housings for wiper rings used in reciprocating rod applications for fluid power cylinders. The range of rod diameters is from 4 mm to 450 mm.

This document is applicable to the following five housing designs.

- Type A: recessed housings with undercut or separate cover to retain elastomeric wipers.
- Type B: open recessed housings for wipers with integral rigid enforcement that are press-fit in the housing.
- Type C: recessed housings with undercut to retain elastomeric wipers (these are the preferred housings for double lip wipers without integral rigid enforcement).
- Type D: recessed housings with undercut to retain elastomer-energized, plastic-faced wipers.
- Type E: recessed housings with undercut or separate cover to retain elastomeric wipers (these are the preferred housings to Type A). ards.iteh.ai)

These housing designs are intended for use with the wiper rings according to Figure 1.

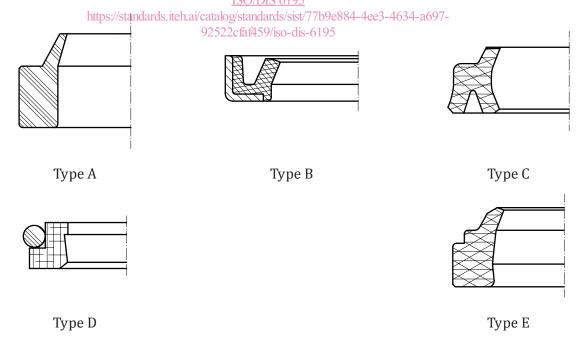


Figure 1 — Types of wiper rings

This document does not otherwise specify the style, configurations, materials, or performance ratings for the wiper ring.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 883, *Indexable hardmetal (carbide) inserts with rounded corners, without fixing hole — Dimensions* 

ISO 3320, Fluid power systems and components — Cylinder bores and piston rod diameters and area ratios — Metric series

ISO 5597, Hydraulic fluid power — Cylinders — Dimensions and tolerances of housings for single-acting piston and rod seals in reciprocating applications

ISO 5598:2008, Fluid Power Systems and Components — Vocabulary

ISO 6020-1, Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 1: Medium series

ISO 6020-2, Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 2: Compact series

ISO 6020-3, Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 3: Compact series with bores from 250 mm to 500 mm

ISO 6022, Hydraulic fluid power — Mounting dimensions for single rod cylinders, 25 MPa (250 bar) series

ISO 10762, Hydraulic fluid power — Mounting dimensions for cylinders, 10 MPa (100 bar) series (standards.iteh.ai)

### 3 Terms and definitions

**ISO/DIS 6195** 

For the purposes of this document, the definitions given in ISO 5598 apply 4634-a697-92522cta 459/iso-dis-6195

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <a href="https://www.iso.org/obp">https://www.iso.org/obp</a>
- IEC Electropedia: available at <a href="http://www.electropedia.org/">http://www.electropedia.org/</a>

### 4 Letter symbols

The letter symbols used in this document are as follows:

а	roughness of the side surface of the wiper housing
b	roughness of the surface of the wiper housing bore
С	axial length of the lead-in chamfer
d	rod diameter
$D_1$	outside diameter of wiper housing
$D_2$	retainer diameter
e	roughness of the rod
f	roughness of the leading chamfer
$L_1$	axial length of the wiper housing
$L_2$	maximum wiper assembly length
$L_3$	retainer width
r	radius

$$S = \frac{(D_1 - d)}{2}$$
 radial depth (cross-section) of the housing

### 5 General

The wiper ring manufacturer should be consulted on the suitability of a particular type of wiper ring for the application.


Sharp edges and burrs shall be removed from corners of supporting surfaces, and rounded.

Surface finishes have a significant impact upon the performance and lifetime of the wipers. Recommended surface finishes are shown in <u>Figures 2</u>, <u>3</u>, <u>4</u>, <u>5</u> and <u>6</u> (see also <u>Clause 8</u> for surface roughness recommendations).

### 6 Requirements for housings

### 6.1 Type A housing

- **6.1.1** Type A housing and a typical wiper ring are shown in Figure 2.
- **6.1.2** Type A housing dimensions and tolerances shall conform to <u>Table 1</u>.
- **6.1.3** Type A wiper rings are recommended for use with cylinders conforming to ISO 6020-1 and to ISO 6022. (standards.iteh.ai)

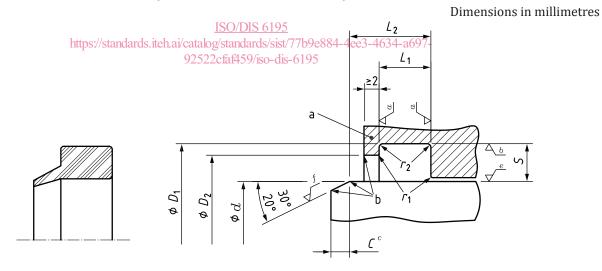

- <sup>a</sup> May be integral or with separate retaining plate.
- b Rounded and burr free.
- c See Table 6 for dimensions.

Figure 2 — Type A wiper housing and typical wiper ring

Table 1 — Dimensions for Type A wiper housing

Dimensions in millimetres

Rod diame- ter <sup>a, b</sup>	Radial depth	Outside diameter	Axial length	Wiper assembly length	Retainer diameter	Retainer radius	Radius
d	S	$D_1$	I	I may	$D_2$		
a		H11 <sup>d</sup>	$L_1$	$L_2$ max	H11 <sup>d</sup>	$r_1$ max	$r_2^c$ max
4		12			9,5		
5		13			10,5		
6		14			11,5		
8		16			13,5		
10		18			15,5		
12		20			17,5		
14		22			19,5		
18		24			21,5	0,3	
18	4.0	26	5,0 +0,2		23,5		
20	4,0	28	0	8 DN DD	25,5		
22		30			27,5		
25		33			30,5	7	
28		1736h S	TANDA		33,5		
32		40			37,5		
36		44	standar	ds.iteh.	<b>ai)</b> 41,5		0.5
40		48		DIS 6195	45,5	607	0,5
45		53			50,5		
50		1 <del>ttps://standards.11</del> 58		dards/sist/77b9e8 59/iso-dis-6195	<del>84-4ee3-4634-a</del> 55,5	597-	
56		66	) LJ LJ LJ LL L	10 63 70 77 87 97	63		1
63		73	62.02				
70	5,0	80	6,3 +0,2		77	0,4	-
80		90	0		87		
90		100	-		97		
100	7,5	115			110		
110		125			120		
125		140	0.5.02		135		
140		155	9,5 +0,3	14	150	0,6	
160		175	0		170		
180		195			190		
200		215			210		

a See ISO 3320 and ISO 5597.

b One-piece housing can be used with rod diameters greater than 14 mm

 $<sup>^{\</sup>rm c}$   $\,$  These specific dimensions permit the use of tools conforming to ISO 883.

d Tolerances and fits are according to ISO 286-1.

Table 1 (continue
-------------------


Rod diame- ter <sup>a, b</sup>	Radial depth	Outside diameter	Axial length	Wiper assembly length	Retainer diameter	Retainer radius	Radius
220	10,0	240	12,5+0,3	18	233,5	0,8	0,9
250		270			263,5		
280		300			293,5		
320		340			333,5		
360		380	0		373,5		
400		420			413,5		
450		470			463,5		

a See ISO 3320 and ISO 5597.

### 6.2 Type B housing

- **6.2.1** Type B housing and a typical wiper ring are shown in Figure 3.
- **6.2.2** Type B housing dimensions and tolerances shall conform to Table 2.
- **6.2.3** Type B wiper rings are recommended for use with cylinders conforming to ISO 6020-1 and to ISO 6022.



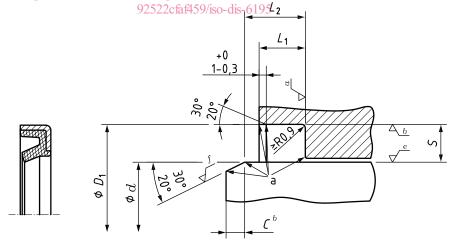

- a Rounded and burr free.
- b See <u>Table 6</u> for dimensions.

Figure 3 — Type B wiper housing and typical wiper ring

b One-piece housing can be used with rod diameters greater than 14 mm

<sup>&</sup>lt;sup>c</sup> These specific dimensions permit the use of tools conforming to ISO 883.

Tolerances and fits are according to ISO 286-1.