

DRAFT INTERNATIONAL STANDARD

ISO/IEC DIS 16388

ISO/IEC JTC 1/SC 31

Secretariat: ANSI

Voting begins on:
2022-03-28

Voting terminates on:
2022-06-20

Information technology — Automatic identification and data capture techniques — Code 39 bar code symbology specification

Technologies de l'information — Techniques automatiques d'identification et de capture des données — Spécifications des symbologies des codes à barres, code 39

ICS: 01.080.50; 35.040.50

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC PRF 16388

<https://standards.iteh.ai/catalog/standards/sist/9be9655b-f811-4df1-ae0d-a52a3116eb2a/iso-iec-prf-16388>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number
ISO/IEC DIS 16388:2022(E)

© ISO/IEC 2022

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC PRF 16388

<https://standards.iteh.ai/catalog/standards/sist/9be9655b-f811-4df1-ae0d-a52a3116eb2a/iso-iec-prf-16388>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements	1
4.1 Symbology characteristics.....	1
4.2 Symbol structure.....	2
4.3 Character encodation.....	2
4.3.1 Symbol character structure.....	2
4.3.2 Symbol character assignments.....	3
4.3.3 Start and stop characters.....	4
4.3.4 Optional symbol check character.....	4
4.4 Dimensions.....	4
4.5 Reference decode algorithm.....	5
4.6 Symbol quality.....	5
4.6.1 Test specification.....	5
4.6.2 Additional parameters.....	6
4.7 Application-defined parameters.....	7
4.7.1 Symbology and dimensional characteristics.....	7
4.7.2 Optical specifications.....	7
4.7.3 Test specifications.....	7
Annex A (informative) Additional features	8
Annex B (informative) Guidelines for the use of Code 39	11
Annex C (normative) Symbology identifier	13
Annex D (informative) Example of application-defined parameters	14
Bibliography	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/IEC JWG1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

This third edition cancels and replaces the second edition (ISO 16388:2007), which has been technically revised.

The main changes compared to the previous edition are as follows:

- Corrected grading of parameter “Inter character gap” in [section 4.6.2.2](#)
- Note added below [Table A.2](#) about possible alternate representation of a minus sign, a period or the numbers 0 to 9 by character pairs.

A list of all parts in the ISO ##### series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The technology of bar coding is based on the recognition of patterns encoded in bars and spaces of defined dimensions. There are numerous methods of encoding information in bar code form, known as symbologies. Code 39 is one such symbology. The rules defining the translation of characters into bar and space patterns and other essential features are known as the symbology specification.

In the past, symbology specifications were developed and published by a number of organizations, resulting in certain instances in conflicting requirements for certain symbologies.

Manufacturers of bar code equipment and users of bar code technology require publicly available standard symbology specifications to which they can refer when developing equipment and application standards.

Identification of patent holders: the following text shall be included if patent rights have been identified.

The International Organization for Standardization (ISO) [and/or] International Electrotechnical Commission (IEC) draw[s] attention to the fact that it is claimed that compliance with this document may involve the use of a patent.

ISO [and/or] IEC take[s] no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO [and/or] IEC that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO [and/or] IEC. Information may be obtained from the patent database available at www.iso.org/patents.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO [and/or] IEC shall not be held responsible for identifying any or all such patent rights.

[ISO/IEC PRF 16388](https://standards.iteh.ai/catalog/standards/sist/9be9655b-f811-4df1-ae0d-a52a3116eb2a/iso-iec-prf-16388)

<https://standards.iteh.ai/catalog/standards/sist/9be9655b-f811-4df1-ae0d-a52a3116eb2a/iso-iec-prf-16388>

Information technology — Automatic identification and data capture techniques — Code 39 bar code symbology specification

1 Scope

This International Standard specifies the requirements for the bar code symbology known as Code 39; it specifies Code 39 symbology characteristics, data character encodation, dimensions, tolerances, decoding algorithms and parameters to be defined by applications. It specifies the Symbology Identifier prefix strings for Code 39 symbols.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 646, *Information technology — ISO 7-bit coded character set for information interchange*

ISO/IEC 15416, *Automatic identification and data capture techniques — Bar code print quality test specification — Linear symbols*

ISO/IEC 15424, *Information technology — Automatic identification and data capture techniques — Data Carrier Identifiers (including Symbology Identifiers)*

ISO/IEC 19762, *Information technology — Automatic identification and data capture (AIDC) techniques — Harmonized vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19762 apply.

4 Requirements

4.1 Symbology characteristics

The characteristics of Code 39 are as follows.

- a) Encodable character set:
 - 1) full alphanumeric A to Z and 0 to 9 (ASCII characters 65 to 90 and 48 to 57 inclusive, in accordance with ISO 646).
 - 2) special characters: space \$ % + - . / (ASCII characters 32, 36, 37, 43, 45, 46 and 47, respectively, in accordance with ISO 646).
 - 3) start/stop character.
- b) Code type: discrete.
- c) Elements per symbol character: 9, of which 3 wide and 6 narrow, comprising 5 bars and 4 spaces.
- d) Character self-checking: yes.

- e) Data string length encodable: variable.
- f) Bidirectionally decodable: yes.
- g) Symbol check character: one, optional (see [Annex A](#)).
- h) Symbol character density: 13 to 16 modules per symbol character, inclusive of minimum intercharacter gap, depending on wide/narrow ratio.
- i) Non-data overhead: equivalent to 2 symbol characters.
- j) Symbol identifier as described in [Annex C](#).


NOTE Usage guidelines are given in [Annex B](#).

4.2 Symbol structure

As illustrated in [Figure 1](#), Code 39 symbols shall comprise

- a) leading quiet zone;
- b) start character;
- c) one or more symbol characters representing data (including symbol check character, if present);
- d) stop character;
- e) trailing quiet zone.

A space, the intercharacter gap, shall separate characters within the symbol.

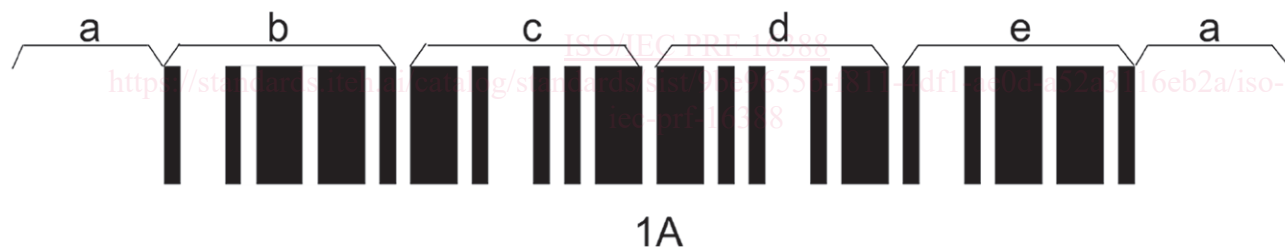

Key

- a Quiet zone
- b Start character
- c Character "1"
- d Character "A"
- e Stop character

Figure 1 — Code 39 symbol

4.3 Character encodation

4.3.1 Symbol character structure

Each symbol character comprises nine elements (five bars and four spaces) of which six are always narrow (either three narrow bars and three narrow spaces, or five narrow bars and one narrow space) and three are always wide (one wide space and two wide bars when there are three narrow bars, or three wide spaces when there are five narrow bars). This parity feature enables character self-checking to be carried out.

4.3.2 Symbol character assignments

Table 1 defines all the Code 39 character assignments.

Table 1 — Code 39 character assignments

Char.	Encodation Pattern	B	S	B	S	B	S	B	S	B	ASCII Value (decimal)
0		0	0	0	1	1	0	1	0	0	48
1		1	0	0	1	0	0	0	0	1	49
2		0	0	1	1	0	0	0	0	1	50
3		1	0	1	1	0	0	0	0	0	51
4		0	0	0	1	1	0	0	0	1	52
5		1	0	0	1	1	0	0	0	0	53
6		0	0	1	1	1	0	0	0	0	54
7		0	0	0	1	0	0	1	0	1	55
8		1	0	0	1	0	0	1	0	0	56
9		0	0	1	1	0	0	1	0	0	57
A		1	0	0	0	0	1	0	0	1	65
B		0	0	1	0	0	1	0	0	1	66
C		1	0	1	0	0	1	0	0	0	67
D		0	0	0	0	1	1	0	0	1	68
E		1	0	0	0	1	1	0	0	0	69
F		0	0	1	0	1	1	0	0	0	70
G		0	0	0	0	0	1	1	0	1	71
H		1	0	0	0	0	1	1	0	0	72
I		0	0	1	0	0	1	1	0	0	73
J		0	0	0	0	1	1	1	0	0	74
K		1	0	0	0	0	0	0	1	1	75
L		0	0	1	0	0	0	0	1	1	76
M		1	0	1	0	0	0	0	1	0	77
N		0	0	0	0	1	0	0	1	1	78
O		1	0	0	0	1	0	0	1	0	79
P		0	0	1	0	1	0	0	1	0	80
Q		0	0	0	0	0	0	1	1	1	81
R		1	0	0	0	0	0	1	1	0	82
S		0	0	1	0	0	0	1	1	0	83
T		0	0	0	0	1	0	1	1	0	84
U		1	1	0	0	0	0	0	0	1	85
V		0	1	1	0	0	0	0	0	1	86
W		1	1	1	0	0	0	0	0	0	87
X		0	1	0	0	1	0	0	0	1	88
Y		1	1	0	0	1	0	0	0	0	89
Z		0	1	1	0	1	0	0	0	0	90
hyphen		0	1	0	0	0	0	1	0	1	45

NOTE 1 S/S denotes the start and stop character, usually graphically represented as *.

NOTE 2 In the columns headed B and S, 0 represents a narrow element and 1 a wide element.

Table 1 (continued)

Char.	Encodation Pattern										ASCII Value (decimal)
	B	S	B	S	B	S	B	S	B	S	
period	1	1	0	0	0	0	1	0	0		46
space	0	1	1	0	0	0	1	0	0		32
\$	0	1	0	1	0	1	0	0	0		36
/	0	1	0	1	0	0	0	1	0		47
+	0	1	0	0	0	1	0	1	0		43
%	0	0	0	1	0	1	0	1	0		37
S/S or *	0	1	0	0	1	0	1	0	0		none
NOTE 1 S/S denotes the start and stop character, usually graphically represented as *.											
NOTE 2 In the columns headed B and S, 0 represents a narrow element and 1 a wide element.											

4.3.3 Start and stop characters

The Code 39 start and stop character is usually depicted in human-readable form by a * (asterisk). This character shall not form part of the data encoded elsewhere in the symbol and shall not be transmitted by the decoder.

The start character shall be positioned at the normal left end of the data symbol characters, separated from the first bar of the leading data character by an intercharacter gap. The stop character shall be positioned at the normal right end of the data symbol characters (including symbol check character if present), separated from the final bar of the trailing data character by an intercharacter gap.

4.3.4 Optional symbol check character

[Annex A](#) defines the symbol check character position and calculation. [ISO/IEC PRF 16388](#) [1-4df1-ae0d-a52a3116eb2a/iso-iec-prf-16388](#)

4.4 Dimensions

Code 39 symbology shall use the following nominal dimensions.

- a) Width of narrow element (X): the X dimension of Code 39 symbols should be defined by the application specification having due regard to the availability of equipment for the production and reading of symbols and complying with the general requirements of the application. See [4.7.1](#).
- b) Wide/narrow ratio (N): 2,0 : 1 to 3,0 : 1.
- c) Width of intercharacter gap (I):
 - 1) minimum: equal to X;
 - 2) maximum:
 - for X < 0,287 mm: 5,3X;
 - for X ≥ 0,287 mm: 1,52 mm or 3X, whichever is greater.
- d) Minimum width of quiet zone: 10X.
- e) Recommended minimum bar code height for manual scanning: 5,0 mm or 15 % of symbol width excluding quiet zones, whichever is greater.

NOTE The width, W (in millimetres), of a Code 39 symbol, including quiet zones, can be calculated from the following expression:

$$W = (C + 2)(3N + 6)X + (C + 1)I + 2Q$$

where

- W is the symbol width;
- C is the number of data characters (including symbol check character if used);
- N is the wide/narrow ratio;
- X is the width of a narrow element in millimetres;
- I is the width of the intercharacter gap in millimetres;
- Q is the width of the quiet zone in millimetres.

4.5 Reference decode algorithm

Bar code reading systems are designed to read imperfect symbols to the extent that practical algorithms permit. This section describes the reference decode algorithm used in the computation of the decodability value described in ISO/IEC 15416.

- a) Confirm presence of a leading quiet zone.
- b) For each symbol character (including start and stop characters):
 - 1) Measure the total width of 5 bars and 4 spaces; call this S .
 - 2) Compute a threshold value, $T = S / 8$.
 - 3) Compare each element width for that character with the value T . If element width is greater than T , assume element is wide; if not, assume element is narrow.
 - 4) Determine if pattern of wide and narrow elements matches a valid character from the allowable set.
- c) The first symbol character read must be a start/stop character, from which the scan direction can be deduced.
- d) Continue character reading until a valid start/stop character is encountered.
- e) Confirm presence of a trailing quiet zone.

4.6 Symbol quality

4.6.1 Test specification

In order to verify whether a symbol meets the specifications in this International Standard it shall be tested using the test specification defined in ISO/IEC 15416, which defines a standardized methodology for measuring and grading bar code symbols, as supplemented in 4.6.2. ISO/IEC 15416 lays down conditions under which measurements should be made; and defines methods of determining an overall quality grade based on the attributes of the bar code symbol. The reference decode algorithm defined in 4.5 shall be used for the assessment of the "decode" and "decodability" parameters under ISO/IEC 15416.

The overall symbol grade shall be expressed in the form shown in the following example:

1,5 / 10 / 660