

---

---

**Information technology — Biometric  
data interchange formats —**

**Part 7:  
Signature/sign time series data**

*Technologies de l'information — Formats d'échange de données  
biométriques —*

**iTeh STANDARD PREVIEW**  
*Partie 7: Données de série chronologique de signature/signé*  
**(standards.iteh.ai)**

ISO/IEC PRF 19794-7

<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>

**PROOF / ÉPREUVE**

---

---



Reference number  
ISO/IEC 19794-7:2021(E)

© ISO/IEC 2021

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC PRF 19794-7](https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7)

<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword .....	v
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>2</b>
<b>4 Abbreviated terms</b> .....	<b>3</b>
<b>5 Conformance</b> .....	<b>4</b>
<b>6 Conventions</b> .....	<b>4</b>
6.1 Coordinate system .....	4
6.2 Octet and bit order .....	5
6.3 Registered format type identifiers .....	5
<b>7 Channels</b> .....	<b>5</b>
7.1 General .....	5
7.2 Pen tip position channels: X, Y, Z .....	6
7.3 Pen tip velocity channels: VX, VY .....	6
7.4 Pen tip acceleration channels: AX, AY .....	6
7.5 Time channel: T .....	6
7.6 Time difference channel: DT .....	7
7.7 Pen tip force channel: F .....	7
7.8 Pen tip switch state channel: S .....	7
7.9 Pen orientation channels: TX, TY, A, E, R .....	7
<b>8 Binary full format</b> .....	<b>8</b>
8.1 Record organization .....	8
8.2 General header .....	11
8.2.1 Structure .....	11
8.2.2 Format identifier .....	11
8.2.3 Version number .....	11
8.2.4 Length of the data record .....	11
8.2.5 Number of representations .....	11
8.2.6 Certification flag .....	11
8.3 Record body .....	12
8.3.1 Structure .....	12
8.3.2 Representation header .....	12
8.3.3 Representation body .....	17
<b>9 Binary compact format</b> .....	<b>17</b>
9.1 Record organization .....	17
9.2 Comparison algorithm parameters template .....	18
9.2.1 Structure .....	18
9.2.2 Minimum and maximum number of sample points .....	18
9.2.3 Channel descriptions .....	19
9.3 Embedment in a CBEFF data structure .....	20
9.4 Record body .....	20
<b>10 Binary compression format</b> .....	<b>20</b>
10.1 Record organization .....	20
10.2 General header .....	21
10.3 Record body .....	21
10.3.1 Structure .....	21
10.3.2 Representation header .....	21
10.3.3 Representation body .....	24
<b>11 XML encoding</b> .....	<b>25</b>
<b>Annex A (normative) Conformance testing methodology</b> .....	<b>26</b>

<b>Annex B</b> (informative) <b>Best practices — Data acquisition</b> .....	<b>71</b>
<b>Annex C</b> (informative) <b>ASN.1 specification of the binary compact format</b> .....	<b>72</b>
<b>Annex D</b> (informative) <b>Binary signature/sign encoding examples</b> .....	<b>75</b>
<b>Annex E</b> (normative) <b>XML schema definition</b> .....	<b>77</b>
<b>Annex F</b> (informative) <b>XML signature/sign encoding example</b> .....	<b>81</b>
<b>Bibliography</b> .....	<b>84</b>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/IEC PRF 19794-7](https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7)

<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives) or [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)) or the IEC list of patent declarations received (see [patents.iec.ch](http://patents.iec.ch)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). In the IEC, see [www.iec.ch/understanding-standards](http://www.iec.ch/understanding-standards).

This document was prepared by joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 37, *Biometrics*.

This third edition cancels and replaces the second edition (ISO/IEC 19794-7:2014), which has been technically revised. It also incorporates the Amendment ISO/IEC 19794-7:2014/Amd 1:2015 and the Technical Corrigendum ISO/IEC 9075-14:2016/Cor 1:2019.

The main changes compared to the previous edition are as follows:

- inclusion of ISO/IEC 19794-7:2014/Amd 1:2015, *XML encoding*, and
- correction of technical defects therein.

A list of all parts in the ISO/IEC 19794 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html) and [www.iec.ch/national-committees](http://www.iec.ch/national-committees).

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/IEC PRF 19794-7

<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>

# Information technology — Biometric data interchange formats —

## Part 7: Signature/sign time series data

### 1 Scope

This document specifies data interchange formats for signature/sign behavioural data captured in the form of a multi-dimensional time series using devices such as digitizing tablets or advanced pen systems. The data interchange formats are generic, in that they can be applied and used in a wide range of application areas where handwritten signs or signatures are involved. No application-specific requirements or features are addressed in this document.

This document contains:

- a description of what data can be captured;
- three binary data formats for containing the data: a full format for general use, a compression format capable of holding the same amount of information as the full format but in compressed form, and a compact format for use with smart cards and other tokens that does not require compression/decompression but conveys less information than the full format;
- an XML schema definition; and [ISO/IEC PR 19794-7](https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0a1185432e69/iso-iec-pr-19794-7)
- examples of data record contents and best practices in capture.

Specifying which of the format types and which options defined in this document are to be applied in a particular application is out of scope; this needs to be defined in application-specific requirements specifications or application profiles.

It is advisable that cryptographic techniques be used to protect the authenticity, integrity, and confidentiality of stored and transmitted biometric data; yet such provisions are beyond the scope of this document.

This document also specifies elements of conformance testing methodology, test assertions and test procedures as applicable to this document. It establishes test assertions on the structure and internal consistency of the signature/sign time series data formats defined in this document (type A level 1 and 2 as defined in ISO/IEC 19794-1) and semantic test assertions (type A level 3 as defined in ISO/IEC 19794-1).

The conformance testing methodology specified in this document does not establish:

- tests of other characteristics of biometric products or other types of testing of biometric products (e.g. acceptance, performance, robustness, security); or
- tests of conformance of systems that do not produce data records claimed to conform to the requirements of this document.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8825-1, *Information technology — ASN.1 encoding rules — Part 1: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)*

ISO/IEC 19794-1, *Information technology — Biometric data interchange formats — Part 1: Framework*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19794-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

#### 3.1

##### **channel**

data item (captured, intermediate, or processed) recorded in form of a time series

EXAMPLE Pen tip position  $x$  and  $y$  coordinates, pen tip force, *pen tilt along the  $x$ -axis* (3.7), *pen tilt along the  $y$ -axis* (3.8), *pen azimuth* (3.3), *pen elevation* (3.5), *pen rotation* (3.6).

#### 3.2

##### **compression**

process that reduces the size of a digital file with or without loss of information

Note 1 to entry: The compression format defined in Clause 10 includes data compressed by lossless compression schemes.

#### 3.3

##### **pen azimuth**

angle measured clockwise from the positive  $y$ -axis to the perpendicular projection of the pen onto the writing plane

Note 1 to entry: The pen azimuth may range from  $0^\circ$  to  $360^\circ$ .

#### 3.4

##### **pen-down event**

event from which on the pen tip is touching the writing plane

#### 3.5

##### **pen elevation**

angle between the perpendicular projection of the pen onto the writing plane and the pen

Note 1 to entry: The pen elevation may range from  $0^\circ$  to  $90^\circ$ .

#### 3.6

##### **pen rotation**

angle of the rotation of the pen about its longitudinal axis measured counter-clockwise from a device-specific rotational reference position

Note 1 to entry: The pen rotation may range from  $0^\circ$  to  $360^\circ$ .

#### 3.7

##### **pen tilt along the $x$ -axis**

angle measured clockwise from the positive  $z$ -axis to the perpendicular projection of the pen onto the  $xz$  plane

Note 1 to entry: The pen tilt along the  $x$ -axis may range from  $-90^\circ$  to  $+90^\circ$ .



**3.8****pen tilt along the y-axis**

angle measured clockwise from the positive z-axis to the perpendicular projection of the pen onto the yz plane

Note 1 to entry: The pen tilt along the y-axis may range from  $-90^\circ$  to  $+90^\circ$ .

**3.9****pen-up event**

event from which on the pen tip is not touching the writing plane, after a *pen-down event* (3.4)

**3.10****sampling rate**

number of samples per second (or per another unit) taken from a continuous signal to make a discrete signal

**3.11****signature/sign representation**

data recorded from a single signature/sign

**3.12****x jitter**

sample standard deviation of at least 100 x-coordinate samples from a stationary pen

**3.13****y jitter**

sample standard deviation of at least 100 y-coordinate samples from a stationary pen

**3.14****x pixel density**

number of dots per millimetre that the capture device resolves in the x (horizontal) direction

**3.15****y pixel density**

number of dots per millimetre that the capture device resolves in the y (vertical) direction

**4 Abbreviated terms**

ASCII	American Standard Code for Information Interchange
BDB	biometric data block
BDIR	biometric data interchange record
BHT	biometric header template
BIR	biometric information record
BIT	biometric information template
CBEFF	common biometric exchange formats framework
IBIA	International Biometrics & Identification Association
ICS	implementation conformance statement
lsb	least significant bit
msb	most significant bit

## 5 Conformance

A binary biometric data record conforms to this document if it satisfies the format requirements with respect to its structure, with respect to relations among its fields, and with respect to relations between its fields and the underlying input that are specified within [Clauses 6 to 10](#) of this document.

An XML document conforms to this document if it satisfies the format requirements with respect to its structure, relations among its fields, and relations between its fields and the underlying input that are specified within [Annex E](#).

Biometric data interchange format conformance tests conform to this document if they satisfy all of the normative requirements set forth in [Annex A](#). Specifically, all level-1, level-2, and level-3 tests shall use the test assertions defined in [Table A.2](#), [Table A.3](#), and [Table A.4](#) of this document in conformity with the concept and rules set out in ISO/IEC 19794-1.

Implementations of this document tested according to the specified methodology shall be able to claim conformance only to those biometric data record requirements specified in this document that are tested by the test methods established by this methodology.


Implementations of this document are not necessarily required to conform to all possible aspects of this document, but only to those requirements that are claimed to be supported by the implementation in an implementation conformance statement (ICS), filled out in accordance with ISO/IEC 19794-1 and [Table A.1](#) of this document.

## 6 Conventions

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

### 6.1 Coordinate system

The coordinate system used to express the pen position shall be a three-dimensional Cartesian coordinate system. The  $x$ -axis shall be the horizontal axis of the writing plane, with  $x$ -coordinates increasing to the right. The  $y$ -axis shall be the vertical axis of the writing plane, with  $y$ -coordinates increasing upwards. The  $z$ -axis shall be the axis perpendicular to the writing plane, with  $z$ -coordinates increasing upwards out of the writing plane starting from 0. For an illustration see [Figure 1](#).

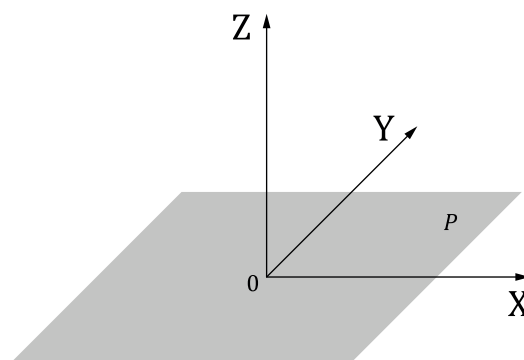

**Key**

*P* writing plane

**Figure 1 — Coordinate system**

**NOTE** The origin of  $x$  and  $y$ -coordinates is not specified here. Depending on the used technology, it can be, for instance, in the centre of the writing pad, at its lower left corner, or at the pen position at the first pen-down event.

## 6.2 Octet and bit order

The more significant bytes of any multi-byte quantity are stored at lower addresses in memory than (and are transmitted before) less significant bytes.

Within a byte, the bits are numbered from 8 to 1, where bit 8 is the ‘most significant bit’ (msb) and bit 1 the ‘least significant bit’ (lsb).

## 6.3 Registered format type identifiers

The data records specified in this document may be embedded in a CBEFF-compliant biometric information record (BIR) (see ISO/IEC 19785-1). This subclause lists the BDB (biometric data block) format owner identifier and the BDB format type identifiers that shall be used if embedded in a CBEFF BIR. These identifiers are registered with IBIA, the CBEFF Registration authority (see ISO/IEC 19785-2).

The format owner of the formats defined in the ISO/IEC 19794 series is ISO/IEC JTC 1/SC 37. The format owner identifier is 257 (0101<sub>Hex</sub>). [Table 1](#) lists the format type identifiers for the formats defined in this document.

**Table 1 — Format type identifiers**

CBEFF BDB format type identifier	Short name	Full object identifier
14 (000e <sub>Hex</sub> )	signature-sign-time-series-full	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-full(14)}
15 (000f <sub>Hex</sub> )	signature-sign-time-series-compact	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-compact(15)}
30 (001e <sub>Hex</sub> )	signature-sign-time-series-compression	{iso(1) registration-authority(1) cbeff(19785) biometric-organization(0) jtc1-sc37(257) bdb(0) signature-sign-time-series-compression(30)}

NOTE 1 The format type identifier for the full format defined in this document (ISO/IEC 19794-7:2021) is the same as the one for the full format defined in ISO/IEC 19794-7:2007. An indication of which version of the full format applies can be determined from the version number included in the general header.

NOTE 2 The compact format defined in this document (ISO/IEC 19794-7:2021) is the same as the one defined in ISO/IEC 19794-7:2007. Hence, the format type identifier for the compact format defined in this edition of ISO/IEC 19794-7 is also the same as the one for the compact format defined in ISO/IEC 19794-7:2007.

## 7 Channels

### 7.1 General

[Table 2](#) lists the channel names and their meanings. Signature/sign time series data captured with different capture devices or used in different applications may contain data from different channels. Either the T channel or the DT channel shall be present, or uniform sampling (constant time difference between adjacent sample points) shall be indicated (see [7.6](#)). Inclusion of at least one other channel is mandatory.

[Annex B](#) provides recommendations for ensuring the quality of signature/sign time series data.

**Table 2 — Channels**

Channel name	Description
X	x-coordinate (horizontal pen position)
Y	y-coordinate (vertical pen position)

Table 2 (continued)

Channel name	Description
Z	z-coordinate (height of pen above the writing plane)
VX	velocity in x-direction
VY	velocity in y-direction
AX	acceleration in x-direction
AY	acceleration in y-direction
T	time
DT	time difference
F	pen tip force
S	pen tip switch state (touching/not touching the writing plane)
TX	pen tilt along the x-axis
TY	pen tilt along the y-axis
A	pen azimuth
E	pen elevation
R	pen rotation

## 7.2 Pen tip position channels: X, Y, Z

There are three channels defined for recording pen tip position data in the three-dimensional space. The X channel is for recording the x-coordinate of the projection of the pen tip on the writing plane. The Y channel is for recording the y-coordinate of the projection of the pen tip on the writing plane. The Z channel is for recording the height of the pen tip above the writing plane.

The unit of measurement is millimetres (mm). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

## 7.3 Pen tip velocity channels: VX, VY

The VX channel is for recording the pen tip velocity along the x-axis. The VY channel is for recording the pen tip velocity along the y-axis.

The unit of measurement is millimetres per second (mm/s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

## 7.4 Pen tip acceleration channels: AX, AY

The AX channel is for recording the pen tip acceleration along the x-axis. The AY channel is for recording the pen tip acceleration along the y-axis.

The unit of measurement is millimetres per square second (mm/s<sup>2</sup>). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

## 7.5 Time channel: T

The T channel is for recording the time elapsed since the first sample.

The unit of measurement is seconds (s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

## 7.6 Time difference channel: DT

The DT channel is for recording the time elapsed since the previous sample point.

The unit of measurement is seconds (s). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

In case of uniform sampling, the channel inclusion field (see [8.3.2.8.1](#)) in the representation header should indicate the DT channel as present, but the DT channel values should be absent in the representation body while the channel description preamble (see [8.3.2.8.2](#)) for the DT channel indicates the time differences between adjacent sample points as constant.

## 7.7 Pen tip force channel: F

The F channel is for recording the magnitude of the pen tip force.

The unit of measurement is Newton (N). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

NOTE The direction of the pen-tip force depends on the capture device technology, which is identified by the capture device technology identifier.

## 7.8 Pen tip switch state channel: S

The S channel is for recording whether the pen tip touches the writing plane or not. The value shall be 0 in the case that the pen tip does not touch the writing plane. In case of pen-down events, the value shall also be 0. The value shall be 1 in the case that the pen tip touches the writing plane. In case of pen-up events, the value shall also be 1.

NOTE Temporarily maintaining a value of 0 when the pen tip starts touching the writing plane allows a recognition of pen-down events even if the capture device provides no sample points for pen-up strokes.


## 7.9 Pen orientation channels: TX, TY, A, E, R

There are five channels defined for recording pen orientation data. The A channel is for recording the pen azimuth. The E channel is for recording the pen elevation. The TX channel is for recording the pen tilt along the  $x$ -axis. The TY channel is for recording the pen tilt along the  $y$ -axis. The R channel is for recording the rotation of the pen about its longitudinal axis. It may be chosen to use:

- pen azimuth and pen elevation, or
- pen tilt along the  $x$  and  $y$ -axes,

with or without the pen rotation. For illustrations see [Figure 2](#) and [Figure 3](#).

The unit of measurement for the pen orientation angles is degree ( $^{\circ}$ ). To restore the actual values, the integer values given in the record body are to be divided by a scaling value given in the channel description. By choosing appropriate scaling values, different degrees of accuracy can be expressed.

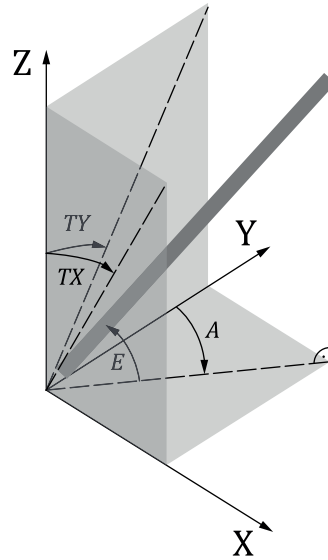


**Key**

- $A$  pen azimuth
- $E$  pen elevation
- $TX$  pen tilt along the x-axis
- $TY$  pen tilt along the y-axis

**iTeh STANDARD PREVIEW**  
**Figure 2 — Pen orientation angles**  
**(standards.iteh.ai)**

ISO/IEC PRF 19794-7  
<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>

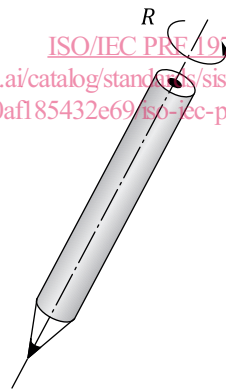

**Key**

- $R$  rotation of the pen about its longitudinal axis

**Figure 3 — Pen rotation**

## 8 Binary full format

### 8.1 Record organization

A signature/sign time series data record in the full format shall consist of the following data elements in the given order:

- a general header, containing descriptive information about the structure and contents of the data record, and
- a record body, containing at least one signature/sign representation.

[Figure 4](#) depicts a signature/sign time series data record in full format. The solid boxes indicate fields that shall be present. The dashed boxes indicate optional fields. The length of each field in bytes is indicated in parentheses at the bottom of the corresponding box. The ellipses indicate that more fields of the same format may follow.

[D.1](#) contains an encoding example in binary full format.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC PRF 19794-7](#)

<https://standards.iteh.ai/catalog/standards/sist/12a3be71-d683-4ae3-92d1-0af185432e69/iso-iec-prf-19794-7>