

FINAL  
DRAFT

INTERNATIONAL  
STANDARD

ISO/FDIS  
24169

ISO/TC 8/SC 8

Secretariat: KATS

Voting begins on:  
**2021-10-27**

Voting terminates on:  
**2021-12-22**

---

---

## Ships and marine technology — Fireproof watertight hatch covers

*Navires et technologie marine — Panneaux d'écouille étanches à l'eau et ignifuges*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/FDIS 24169](https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169)

<https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number  
ISO/FDIS 24169:2021(E)

© ISO 2021

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/FDIS 24169](https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169)

<https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Classification and designation</b> .....	<b>1</b>
4.1 Types.....	1
4.2 Structure and main dimensions.....	2
<b>5 Materials</b> .....	<b>5</b>
<b>6 Quality of manufacture</b> .....	<b>5</b>
<b>7 Test</b> .....	<b>6</b>
<b>8 Status display</b> .....	<b>6</b>
<b>9 Markings, packaging, transportation and storage</b> .....	<b>7</b>
9.1 Marking.....	7
9.2 Packaging.....	7
9.3 Transportation and storage.....	7

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/FDIS 24169](https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169)

<https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 8, *Ship design*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

# Ships and marine technology — Fireproof watertight hatch covers

## 1 Scope

This document specifies the classification, flagging, requirements, test methods, inspection rules, markings, packaging, transportation and storage of fireproof watertight hatch covers installed on decks (hereafter referred to as “hatch covers”).

This document applies to the design, manufacture and acceptance of fireproof watertight hatch covers installed on decks of ships where anticipated water pressure by wave is up to 10 m.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8501-1, *Preparation of steel substrates before application of paints and related products — Visual assessment of surface cleanliness — Part 1: Rust grades and preparation grades of uncoated steel substrates and of steel substrates after overall removal of previous coatings*

IEC 60529, *Degrees of Protection provided by enclosures (IP Code)*

IMO *International Convention for the Safety of Life at Sea (SOLAS), 1974, and its Protocol of 1988, as amended*

<https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169>

IMO *International Code for Application of Fire Test Procedures, 2010 (2010 FTP Code), Resolution 307(88), as amended*

## 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

## 4 Classification and designation

### 4.1 Types


**4.1.1** Based on their shape, watertight hatch covers shall be classified into the two following types:

- A-type (round hatch cover);
- B-type (square or rectangular hatch cover).

**4.1.2** According to the fire-protection rating, watertight hatch covers shall be classified into three levels: A-60, A-30, and A-0.

4.2 Structure and main dimensions

4.2.1 Examples of the structure and main dimensions of A-type hatch covers are shown in Figure 1 and Table 1.

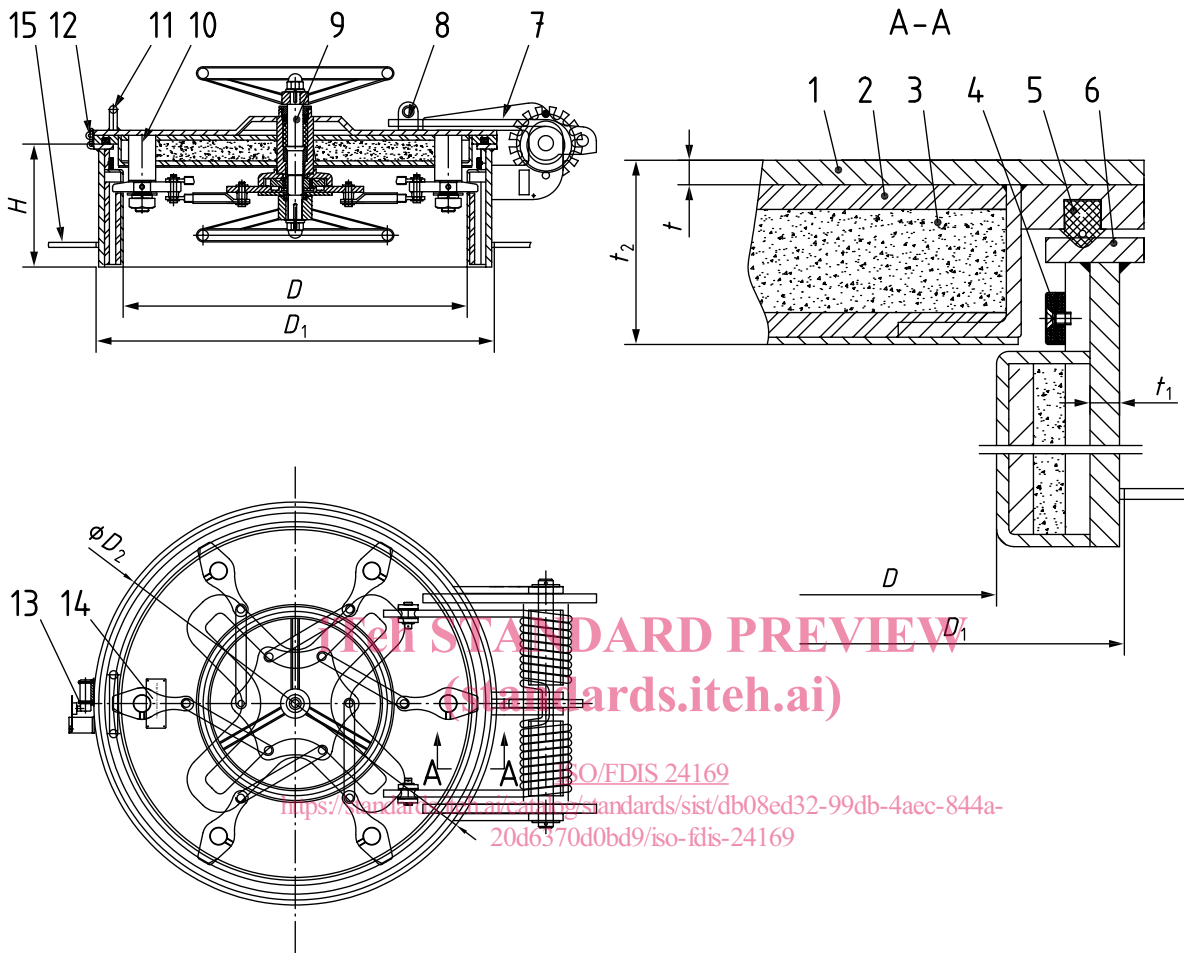

Key

- |                    |                          |
|--------------------|--------------------------|
| 1 cover plate      | 9 central opening device |
| 2 insulation plate | 10 dog device            |
| 3 insulation       | 11 handle                |
| 4 fireproof bar    | 12 lock catch            |
| 5 seal ring        | 13 limit switch          |
| 6 coaming          | 14 warning sign          |
| 7 spring hinge     | 15 deck                  |
| 8 link rod         |                          |

$H$  is the height of the hatch cover coaming.  $H$  can be designed according to users practice.

$t_2$  is the thickness of the hatch cover.  $t_2$  shall be no more than 75 mm, and shall be designed based on fire-protection rating.

$t$  is the thickness of cover plate.  $t$  can be designed based on water pressure.

Figure 1 — Examples of structure of A-type hatch covers

**Table 1 — Examples of main dimensions of A-type hatch covers**

Dimensions in millimetres


<b>Nominal size</b> <i>D</i>	<b>Deck opening size</b> <i>D</i> <sub>1</sub>	<b>Cover outer dimension size</b> <i>D</i> <sub>2</sub>
ø630	ø730	ø750
ø730	ø830	ø850
ø830	ø930	ø950

4.2.2 Examples of the structure and main dimensions of B-type hatch covers are shown in [Figure 2](#) and [Table 2](#).

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/FDIS 24169](#)

<https://standards.iteh.ai/catalog/standards/sist/db08ed32-99db-4aec-844a-20d6370d0bd9/iso-fdis-24169>

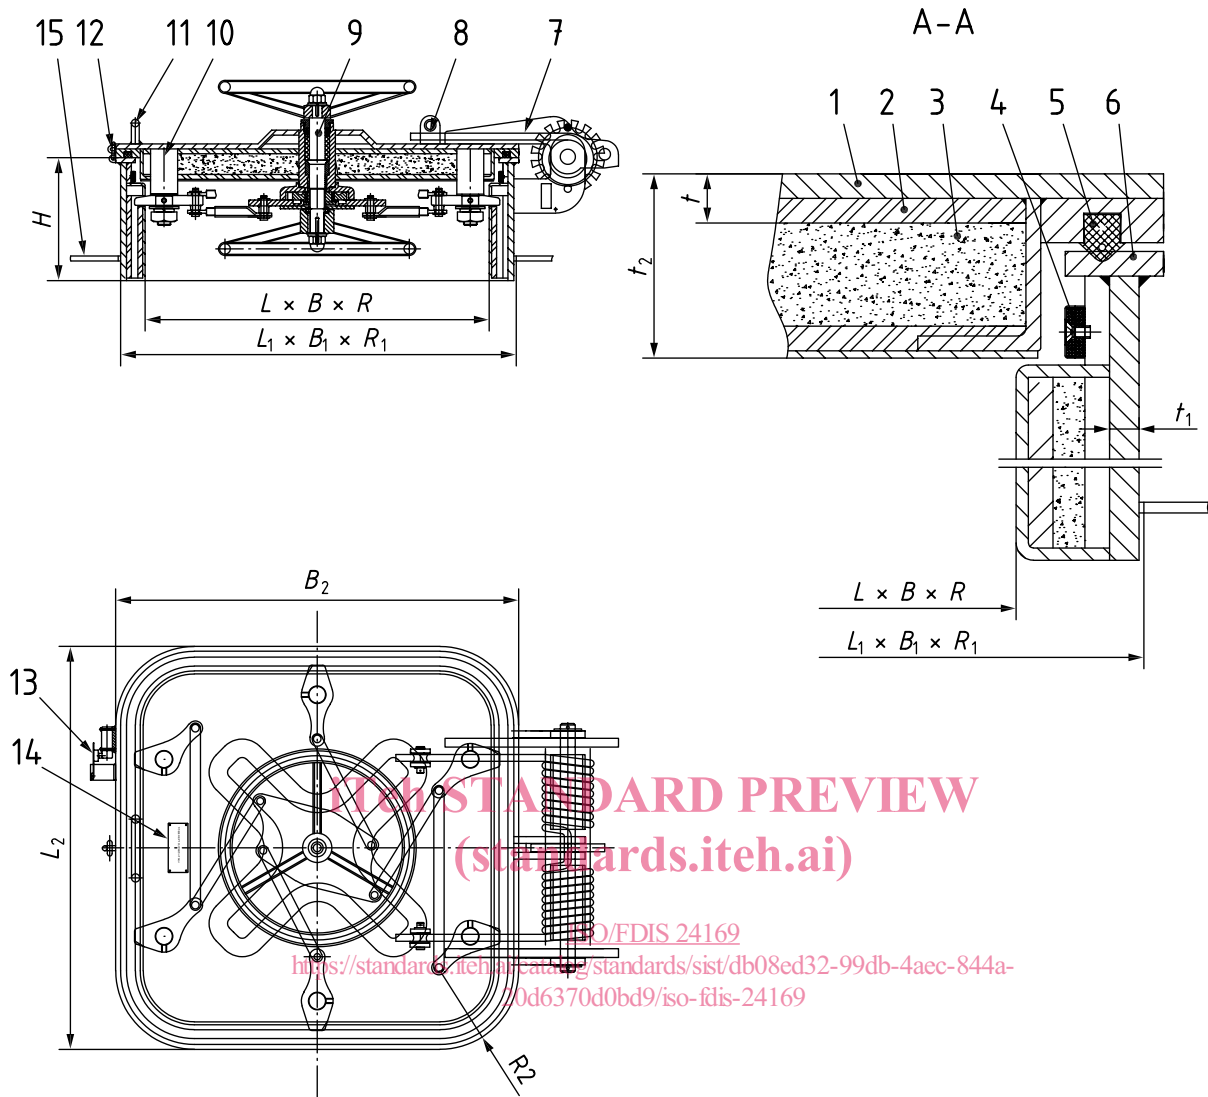

**Key**

- |   |                  |    |                        |
|---|------------------|----|------------------------|
| 1 | cover plate      | 9  | central opening device |
| 2 | insulation plate | 10 | dog device             |
| 3 | insulation       | 11 | handle                 |
| 4 | fireproof bar    | 12 | lock catch             |
| 5 | seal ring        | 13 | limit switch           |
| 6 | coaming          | 14 | warning sign           |
| 7 | spring hinge     | 15 | deck                   |
| 8 | link rod         |    |                        |

*H* is the height of the hatch cover coaming. *H* can be designed according to users practice.

*t*<sub>2</sub> is the thickness of the hatch cover. *t*<sub>2</sub> shall be no more than 75 mm, and shall be designed based on fire-protection rating.

*t* is the thickness of the cover plate. *t* can be designed based on water pressure.

**Figure 2 — Examples of structure of B-type hatch covers**



Table 2 — Examples of main dimensions of B-type hatch covers

Dimensions in millimetres

Nominal size $L \times B \times R$	Deck opening size $L_1 \times B_1 \times R_1$	Cover outer dimension size $L_2 \times B_2 \times R_2$
630 × 630 × 100	730 × 730 × 150	750 × 750 × 160
630 × 830 × 100	730 × 930 × 150	750 × 950 × 160
830 × 830 × 100	930 × 930 × 150	950 × 950 × 160
1 030 × 1 030 × 100	1 130 × 1 130 × 150	1 150 × 1 150 × 160
830 × 1 230 × 100	930 × 1 330 × 150	950 × 1 350 × 160
1 230 × 1 230 × 100	1 330 × 1 330 × 150	1 350 × 1 350 × 160
1 330 × 1 330 × 100	1 430 × 1 430 × 150	1 450 × 1 450 × 160

4.2.3 Fireproof watertight hatch covers conforming to this document shall be designated as follows, in the order given:

- type: hatch cover B or hatch cover A;
- nominal size;
- thickness of the cover plate;
- thickness of coaming;
- height of coaming.

EXAMPLE The designation of a B-type hatch cover with nominal size 830 mm × 830 mm × 100 mm, thickness of the cover plate 8 mm, thickness of coaming 8 mm and height of coaming 250 mm is:

**Hatch cover B 830×830×8-8×250**

## 5 Materials

5.1 The cover plate and coaming shall be manufactured from shipbuilding steel with a minimum tensile strength of \*340 N/mm<sup>2</sup>, or from materials with an equivalent strength.

5.2 The hinge shall be manufactured from materials with a minimum tensile strength of \*340 N/mm<sup>2</sup>.

5.3 Opening devices and hinge pins shall be manufactured from materials with a minimum tensile strength of \*350 N/mm<sup>2</sup>.

5.4 For ships adhering to the rules of a classification society, the material marked with ( \* ) shall conform to the requirements of the society.

5.5 Fireproof materials shall be suitable for the marine environment, and shall meet the fire-protection rating requirements in accordance with SOLAS and the IMO FTP Code.

## 6 Quality of manufacture

6.1 The surface of hatch covers shall be free from burrs, sharp edges, scratches, press marks and other defects, and the welded seam shall be smooth and free from cavities, cracks, slag entrapments, undercuts, incomplete fusion and other defects.

**6.2** The cover plate, coaming and its attachments shall not have any deformation. Hatch covers shall be treated as grade Sa2½ or grade St2 and coating anti-rust primer in compliance with the requirements of ISO 8501-1.

**6.3** Hatch covers shall be capable of being opened and closed easily without obstruction, and the moving parts shall be maintained in good working condition.

**6.4** Fire resistance properties of hatch covers shall comply with that of an "A" class fire door in IMO Resolution MSC.307 (88)-(2010 FTP Code) Annex 1, Part 3, as amended. In addition, the maximum temperature rise measured along the hatch coaming shall not exceed 180 °C for the required test duration. The fire testing and instrumentation requirements for hatch covers shall be in accordance with [7.2](#) of this document.

**6.5** Hatch covers shall have no leakage under a water pressure of 0,1 MPa.

## 7 Test

**7.1** Operate the hatch cover by opening and closing it twice in a row, to check the agility of the opening device and the hinge. The requirements in [6.3](#) shall be met.

**7.2** Fire resistance properties of hatch covers shall be verified generally in accordance with the fire testing and instrumentation requirements of an "A" class fire door in IMO Res. MSC.307 (88)-(2010 FTP Code) Annex 1, Part 3, Appendix 1, paragraphs 2.3 and 7.6.3 respectively and additional requirements specified in [7.2.1](#) to [7.2.2](#) of this document. The result shall meet the requirements in [6.4](#) of this document.

**7.2.1** As higher temperatures may be expected along the hatch coaming, additional thermocouples shall be placed directly on the hatch coaming 25 mm from the fire unexposed surface of the cover plate, provided that the thermocouples are at least 100 mm away from the gap between the edge of the hatch leaf and frame. Where this is not possible because the coaming does not extend 25 mm from the deck, or where the thermocouples are closer than 100 mm from the gap between the hatch leaf edge and frame, such thermocouples shall be placed directly on the deck plate 100 mm away from the coaming. Each of the thermocouples (minimum of four) shall be placed at the centre of each side of the coaming or corresponding location on the deck.

**7.2.2** These thermocouples are additional to those required to be provided on the hatch cover/lid, stiffeners and/or any other special features in accordance with 2010 FTP Code Annex 1, Part 3, Appendix 1, paragraph 7.6.3.

**7.3** Install the hatch cover on a dedicated water pressure test box, increase the water pressure within the test box to 0,10 MPa, and keep it for 5 min, then release the water pressure. The requirements in [6.5](#) shall be met.

## 8 Status display

**8.1** In case local indicators and indicators located at the central control console in the navigation bridge are provided to indicate the status of each hatch cover, the indicators shall be regular indicators together with a sound and light warning function:

- a) when the cover is fully open, the red light shall be on;
- b) when the cover is fully closed, the green light shall be on;
- c) if the hatch cover dogs are loose, an indicator shall display a sound and light alarm.