
**Cycles — Safety requirements for
bicycles —**

**Part 7:
Wheel and rim test methods**

Cycles — Exigences de sécurité pour les bicyclettes —

Partie 7: Méthodes d'essai des roues et des jantes

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4210-7:2023

<https://standards.iteh.ai/catalog/standards/sist/544ef5ce-5a51-47fe-918f-f21d437bbbc9/iso-4210-7-2023>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4210-7:2023

<https://standards.iteh.ai/catalog/standards/sist/544ef5ce-5a51-47fe-918f-f21d437bbbc9/iso-4210-7-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Test methods.....	1
4.1 Wheel and tyre assembly — Rotational accuracy.....	1
4.2 Wheel and tyre assembly — Static strength test — Test method.....	3
4.3 Wheels — Front/rear wheel retention devices secured — Test method.....	4
4.4 Wheel and tyre assembly — Greenhouse effect test for composite wheels — Test method.....	4
4.5 Wheel and tyre assembly — Heat-resistance test for composite rims used in conjunction with rim brake.....	5
4.6 Wheel — Impact test — Test method.....	6
4.7 Wheel and tyre assembly — Overpressure test — Test method.....	7
4.7.1 Wheel and tyre assembly preparation.....	7
4.7.2 Test method.....	8
Annex A (informative) Wheel and tyre assembly — Fatigue test for city and trekking bicycles.....	9

(standards.iteh.ai)

[ISO 4210-7:2023](https://standards.iteh.ai/catalog/standards/sist/544ef5ce-5a51-47fe-918f-f21d437bbbc9/iso-4210-7-2023)

<https://standards.iteh.ai/catalog/standards/sist/544ef5ce-5a51-47fe-918f-f21d437bbbc9/iso-4210-7-2023>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 149, *Cycles*, Subcommittee SC 1, *Cycles and major sub-assemblies*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 333, *Cycles*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 4210-7:2014), which has been technically revised.

The main changes are as follows:

- addition of [4.5](#);
- addition of [4.6](#);
- addition of [4.7](#).

A list of all parts in the ISO 4210 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document has been developed in response to demand throughout the world, and the aim has been to ensure that bicycles manufactured in conformity with this document will be as safe as is practically possible. The tests have been designed to ensure the strength and durability of individual parts as well as of the bicycle as a whole, demanding high quality throughout and consideration of safety aspects from the design stage onwards.

The scope has been limited to safety considerations and has specifically avoided standardization of components.

If the bicycle should be used on public roads, national regulations apply.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4210-7:2023

<https://standards.iteh.ai/catalog/standards/sist/544ef5ce-5a51-47fe-918f-f21d437bbbc9/iso-4210-7-2023>

Cycles — Safety requirements for bicycles —

Part 7: Wheel and rim test methods

1 Scope

This document specifies wheel and rim test methods for ISO 4210-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4210-1, *Cycles — Safety requirements for bicycles — Part 1: Vocabulary*

ISO 4210-2:2023, *Cycles — Safety requirements for bicycles — Part 2: Requirements for city and trekking, young adult, mountain and racing bicycles*

ISO 4210-3:2023, *Cycles — Safety requirements for bicycles — Part 3: Common test methods*

ISO 4210-4:2023, *Cycles — Safety requirements for bicycles — Part 4: Braking test methods*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4210-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>


4 Test methods

4.1 Wheel and tyre assembly — Rotational accuracy

The run-out tolerances represent the maximum variation of the position of the rim when measured perpendicular to the axle at a suitable point along the rim (see [Figure 1](#) and [Figure 2](#)) (i.e. full indicator reading) of a fully assembled and adjusted wheel during one complete revolution about the axle without axial movement. Both sides of the rim shall be measured and the maximum value shall be taken as result.

For city and trekking, mountain, and young adult bicycles, the measurement of both axial run-out (lateral) and radial run-out (concentricity) shall be done with a tyre fitted and inflated to the maximum inflation pressure, but for rims where concentricity cannot be measured with the tyre fitted, it is permissible to make measurements with the tyre removed.


For racing bicycles, the measurement of both axial run-out (lateral) and radial run-out (concentricity) shall be measured at the same time as shown in [Figure 2](#) and a tyre is not required to be fitted.

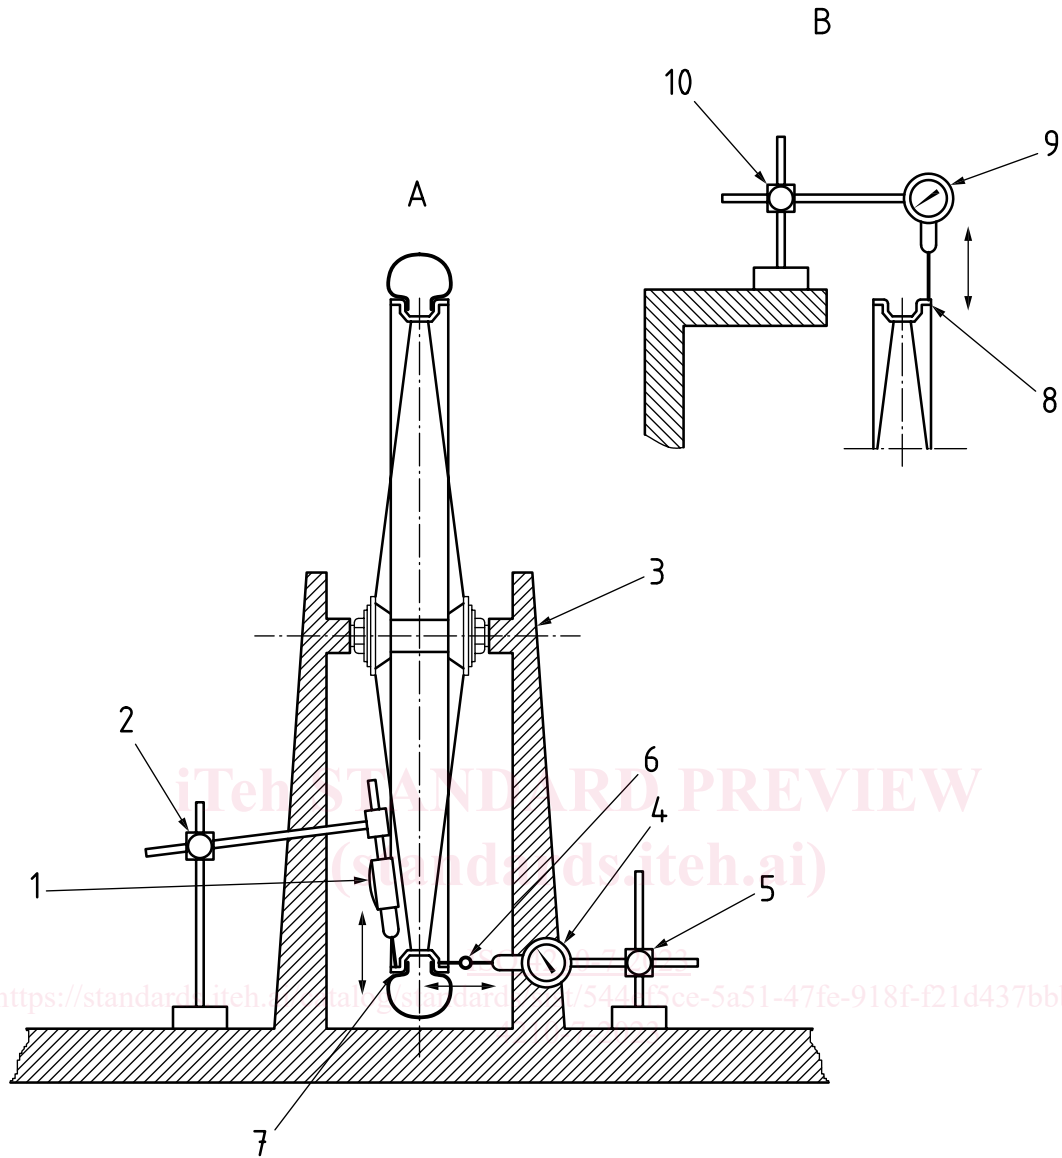

Key

- | | | | |
|---|------------------------------|----|---|
| A | rim with tyre | 5 | instrument stand |
| B | rim without tyre | 6 | roller indicator |
| 1 | dial-gauge (concentricity) | 7 | rim with tyre |
| 2 | instrument stand | 8 | rim without tyre |
| 3 | hub axle support | 9 | dial-gauge (concentricity; alternative positions) |
| 4 | dial-gauge (lateral run-out) | 10 | instrument stand |

Figure 1 — Wheels and tyre assembly — Rotational accuracy for city and trekking, young adult, and mountain bicycles

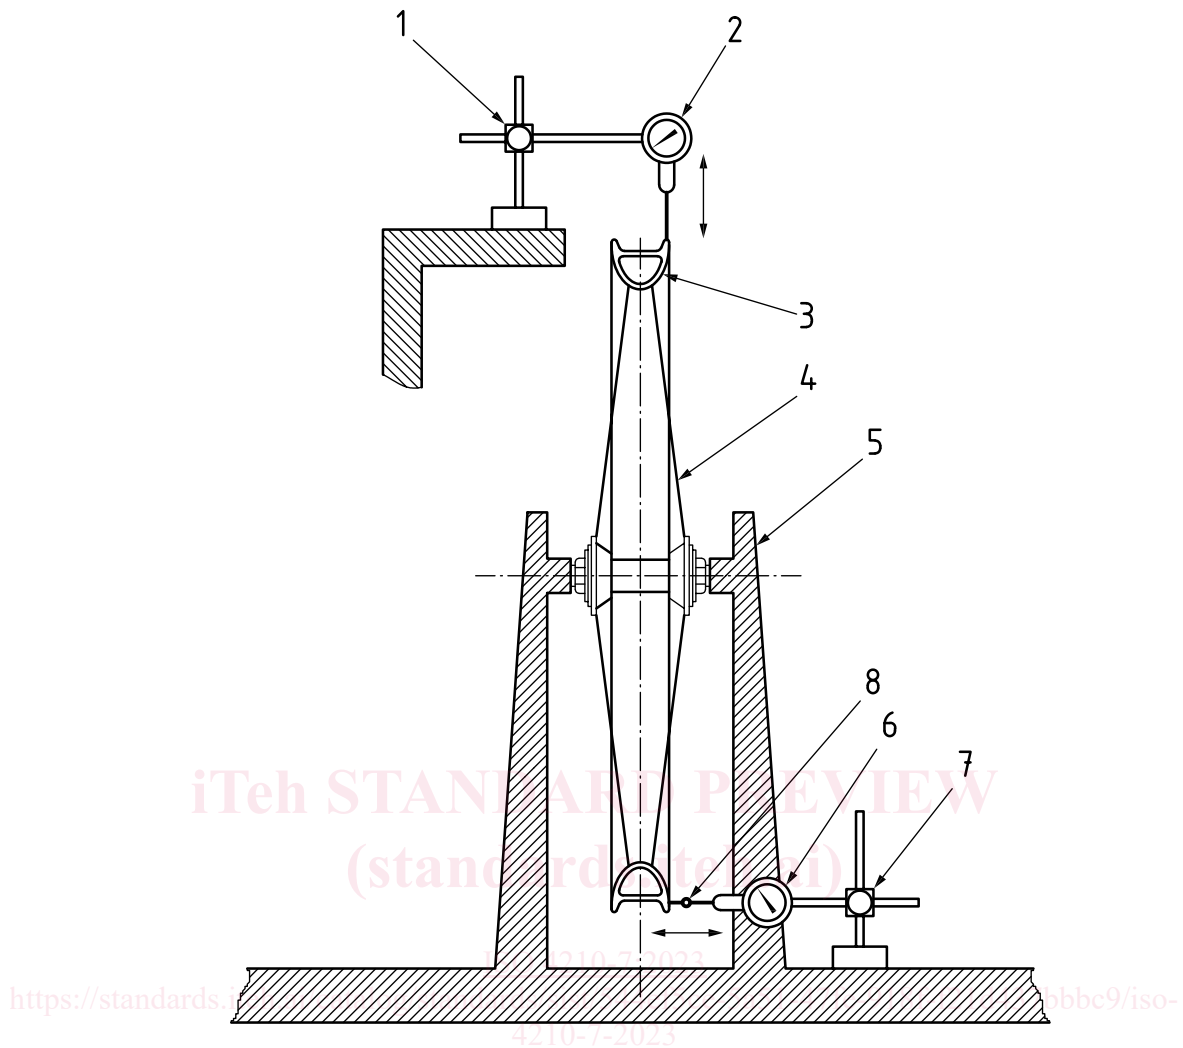**Key**

- | | | | |
|---|----------------------------|---|------------------------------|
| 1 | instrument stand | 5 | hub axle support |
| 2 | dial-gauge (concentricity) | 6 | dial-gauge (lateral run-out) |
| 3 | rim | 7 | instrument stand |
| 4 | spoke | 8 | roller indicator |

Figure 2 — Wheel — Rotational accuracy for racing bicycles

4.2 Wheel and tyre assembly — Static strength test — Test method

Clamp and support the wheel suitably as shown in [Figure 3](#). Apply a pre-load of 5 N on the rim at one spoke perpendicular to the plane of the wheel as shown in [Figure 3](#). Record the zero position of the rim at the point of load application as shown. Then apply a static force of F given in [Table 1](#) for a duration of 1 min. Reduce the load to 5 N and allow a 1 min settling time. After this settling time and with the 5 N load still applied, re-measure the position of the rim.

The wheel shall be fitted with the appropriate size tyre and inflated to the maximum inflation pressure.

In the case of a rear wheel, apply the force from the sprocket side of the wheel as shown in [Figure 3](#).


Repeat the above measurement once between two spokes.

See [Annex A](#) for fatigue testing.

Table 1 — Forces on rim

Forces in newtons

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Force F	250	250	370	250

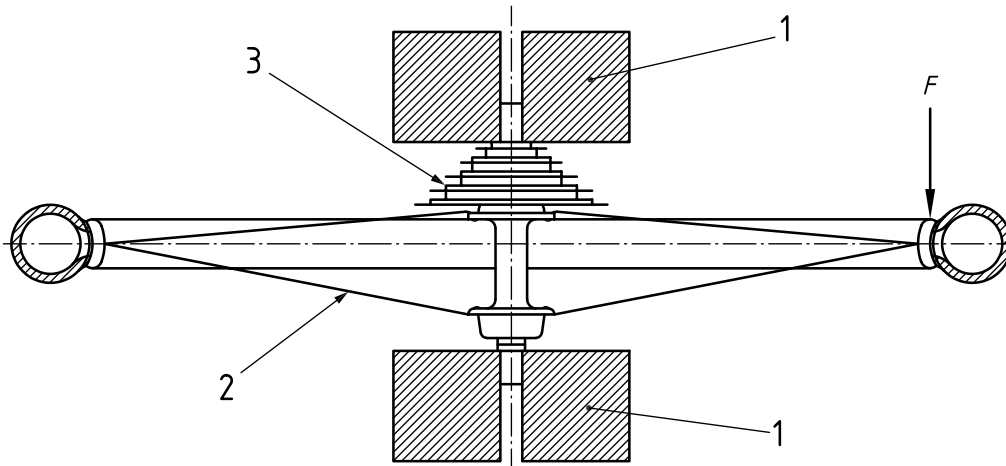

- Key**
- 1 clamping fixture
 - 2 wheel and tyre assembly
 - 3 drive sprockets
 - F static force

Figure 3 — Wheel and tyre assembly — Static strength test

4.3 Wheels — Front/rear wheel retention devices secured — Test method

Apply a force of 2 300 N distributed symmetrically to both ends of the axle for a period of 1 min in the direction of the removal of the front and rear wheel independently.

4.4 Wheel and tyre assembly — Greenhouse effect test for composite wheels — Test method

A fully assembled wheel, fitted with the appropriate size tyre and inflated according to the lower value between maximum inflation pressure recommended on the rim or the tyre, shall be controlled before the test; lateral run-out shall be controlled according to ISO 4210-2:2023, 4.10.1 and maximum widths of the rim shall be reported. It is acceptable to assemble with a tube, even on a tubeless wheel assembly.

A specific bench as shown in Figure 5 may be used to measure the maximum width all around the rim with tyre and pressure (continuous measuring).

The wheel and tyre assembly is laid down on the ground of a climate chamber, which has been pre-heated at 80 °C, leant on axle and tyre support points, sprocket side of the wheel, as shown in Figure 4, during 4 h. At the end of 4 h, the wheel and tyre assembly should be taken out of the climate chamber and allowed to cool down at room temperature during 4 h to re-measuring the rim width and its conformance to ISO 4210-2:2023, 4.10.6.1 and 4.10.6.2.