

ISO/~~DIS~~DIS 24221:~~2022~~2023 (E)

ISO TC 269/SC 2/WG 1

Secretariat: AFNOR

~~Date: 2022-08-25~~

Railway applications — Braking system — General requirements

First edition

Date: 2023-07-12

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24221

<https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-24221>

ISO/FDIS 24221:2023(E)

© ISO ~~2022~~ 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ~~ISO's~~ISO's member body in the country of the requester.

ISO Copyright Office
CP 401 • CH-~~de Blandonnet 8~~

~~CH~~-1214 Vernier, Geneva
Phone: + 41 22 749 01 11
Email: copyright@iso.org ~~copyright@iso.org~~
Website: www.iso.org
Published in Switzerland.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24221

<https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-24221>

Contents

Foreword..... v

1 Scope..... 1

2 Normative references 1

3 Terms and definitions and units..... 1

3.1 Terms and definitions..... 1

3.2 Units..... 2

4 Requirements 2

4.1 General requirements of the train brake system..... 2

4.2 General safety requirements 3

4.3 Requirements for the main brake system 3

4.3.1 General requirements..... 3

4.3.2 General functions on train level 4

4.3.3 Additional requirements at the vehicle level 6

4.4 Brake management..... 7

4.4.1 Brake blending at vehicle level 7

4.4.2 Independent dynamic brake..... 7

4.5 Additional brake systems 8

4.5.1 Dynamic braking 8

4.5.2 Independent direct braking (“direct brake”) for locomotives and traction units..... 8

4.6 Wheel slide protection..... 10

4.7 Enhancement of wheel/rail adhesion..... 11

4.8 Compatibility for rescue purposes..... 12

5 Calculation requirements 13

5.1 General aspects 13

5.2 Performance calculation 13

5.2.1 General..... 13

5.2.2 Calculations for degraded mode..... 13

5.3 Relevant load conditions..... 13

5.4 Service braking 13

5.5 Thermal capacity 14

5.5.1 General..... 14

5.5.2 Conditions..... 14

5.5.3 Structural integrity of the brake components 14

5.5.4 Stopping distance extension 14

5.5.5 Duty cycle..... 15

5.6 Wheel/rail adhesion..... 15

5.7 Parking brake 16

Annex A (informative) Automatic air brake system 17

Annex B (informative) Wheel/rail adhesion demand levels applied in Europe..... 19

Annex C (informative) Relationship between this ISO standard and the local regulations in Japan 21

Bibliography 22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

~~Attention is drawn to the possibility that some of the elements of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see).~~

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 269, *Railway applications*, Subcommittee SC 2, *Rolling stock*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Railway applications — Braking system — General requirements

1 Scope

This document specifies the general requirements for brake systems. ~~This document~~ focuses on general principles and general requirements of brake systems.

This document is applicable for all types of rolling stock during design and whole lifetime. This document does not specify the braking performance criteria.

This document can be applied to all rolling stock with metal to metal wheel/rail contact irrespective of speed classification.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4975, *Railway applications — Braking system — Quality of compressed air for pneumatic apparatus and systems*

ISO 10516, *Railway application — Vehicle reference masses*¹

ISO 20138 (all parts), *Railway applications — Calculation of braking performance (stopping, slowing and stationary braking)*

ISO 24478, *Railway applications — Braking — Generic vocabulary*

~~3 Terms and definitions and units~~

~~4.3 Terms and definitions~~

For the purposes of this document, the terms and definitions given in ISO 24478 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

~~3.1.1~~ general operation

¹ Under preparation. Stage at the time of publication: ISO/CD 10516:2023.

ISO/FDIS 24221:2023(E)

mode of operation of units intended to be coupled with other units in a train formation which is not defined at design stage

~~3.1.2~~

assessment

process of judging or deciding the amount, value, quality, or importance of something

~~3.1.3~~

testing

process of using or trying something to see if it works, is suitable, or obeys the rules, ~~etc.~~

~~3.1.4~~

verification

process of proving that something exists or is true, or to make certain that something is correct

~~3.1.5~~

nominal ~~conditions~~condition

given set of conditions (e.g. dry rail, straight and level track) used to determine the braking performance without safety margin or a confidence level

~~3.1.6~~

normal mode

operating condition with all expected brakes available and performing as specified

Note 1 to entry: Some brake units can be intentionally isolated.

~~3.1.7~~

degraded mode

operating condition where some of the brakes are not available and/or not performing as specified (e.g. equipment failure, leakage)

~~3.1.8~~

degraded ~~conditions~~condition

external ~~factors~~factor adversely affecting the braking performance (e.g. low wheel/rail adhesion, wind, ice, snow)

~~3.1.9~~

maximum braking load

load condition corresponding to the maximum mass of payload for braking purposes

5.0 Units

~~This document uses SI units. However, in accordance with standard railway practice with regard to compressed air, some non-SI units are used, e.g.:~~

~~— for pressure indication, the unit used is “bar”: 1 bar = 10^5 Pa;~~

~~— for volume indication, the unit used is “litre”: 1 l = 10^{-3} m³.~~

7.4 Requirements

7.4.1 General requirements of the brake systems

The purpose of the main brake system is to ensure that the train can be slowed, the train speed can be maintained on a slope, the train can be stopped and immobilized when it is stopped.

Brake systems shall enable service brake application, emergency brake application and stationary braking.

Brake systems may include additional applications, e.g. safety brake application, earthquake application.

Rail vehicles/units designed and intended to be coupled and operated together shall be fitted with a compatible brake system to ensure the brake function in all vehicles/units of the train.

Brake systems may include functions which temporarily apply traction and brake at the same time (e.g. snow brake, hill start).

Self-propelled special vehicles in their running mode generally follow the requirements for locomotives. Special vehicles that are hauled in their running mode generally follow the requirements for freight vehicles.

NOTE 'Special vehicles' are ~~such~~ machines which include infrastructure inspection machines and on-track machines (OTMOTMs).

The brake system can incorporate the ability to adjust the braking force depending on the load of the rail vehicle/unit/train.

In brake systems using compressed air, the minimum air quality shall comply with ISO 4975.

More detailed information about automatic air brake systems is given in Annex A.

~~Additional~~ Information about certain national requirements for brake systems is given in Annex C.

7.4.2 General safety requirements

If a trainwide control signal for an emergency brake application is sent, no single failure in the main brake system shall result in a loss of more than 50 % of the total braking force of the train.

Any brake application signal on a service or emergency trainwide brake control line shall always cancel any traction demand.

After a control signal for a parking brake application is sent, no single failure in the brake system shall result in the complete and permanent loss of the stationary braking force of the train.

The emergency brake function of a train shall be automatic. Any inadvertent disruption of the trainwide emergency brake control line (e.g. loss of integrity resulting from an unintended train separation caused by a mechanical failure) shall immediately lead to ~~an~~ trainwide control signal for an emergency brake application to all vehicles from the train.

There shall be sufficient braking energy available on board the train, from the minimum stored energy distributed along the train appropriately for the design of the brake system, to ensure at least one emergency brake application capable of stopping the train from its maximum speed in any loading condition. The local energy storage shall take into account the consumption of energy by the wheel slide protection (WSP) system under degraded conditions during emergency braking. ~~(this is sometimes referred to as inexhaustibility).~~

NOTE — This is sometimes referred to as inexhaustibility.

Any emergency brake demand shall lead immediately to a trainwide brake control signal for an emergency brake application and take priority over any existing brake and/or traction demand ~~(see 4.3.2.1, a) to d)).~~

ISO/FDIS 24221:2023(E)

The cancellation of an emergency brake demand shall not lead to an automatic release of the brake. The release of an emergency brake application shall require an intentional operational demand for example by the driver or by automatic train control system.

The propagation speed of the trainwide emergency brake control signal shall be not less than 250 m/s.

7.3.4.3 Requirements for the main brake system

7.3.4.3.1 General requirements

A main brake system shall provide, as a minimum, the following functions:

- emergency brake application and release;
- service brake application and release;
- stationary brake application and release.

A brake demand for a brake application shall always have priority over a brake demand for a brake release that may have already been initiated.

To achieve these functions, a main brake system generally incorporates the following features:


- trainwide brake control device(s);
- brake demand devices (driver's cab equipment, control command signalling equipment, etc.);
- trainwide brake control line(s);
- local brake control device(s);
- brake units;
- monitoring and display of the brake status;
- distributed energy storage for braking force generation.

For further explanations on devices and signals, see ISO 24478:2022, Annex D.

When a trainwide energy supply line is used that is separate from any trainwide brake control lines, it is permitted for this energy supply line also to supply energy to other systems.

The energy in a trainwide brake control line and local brake energy storage shall not be used for other purposes than for the brake.

The general structure of a main brake system is shown in Figure 1.

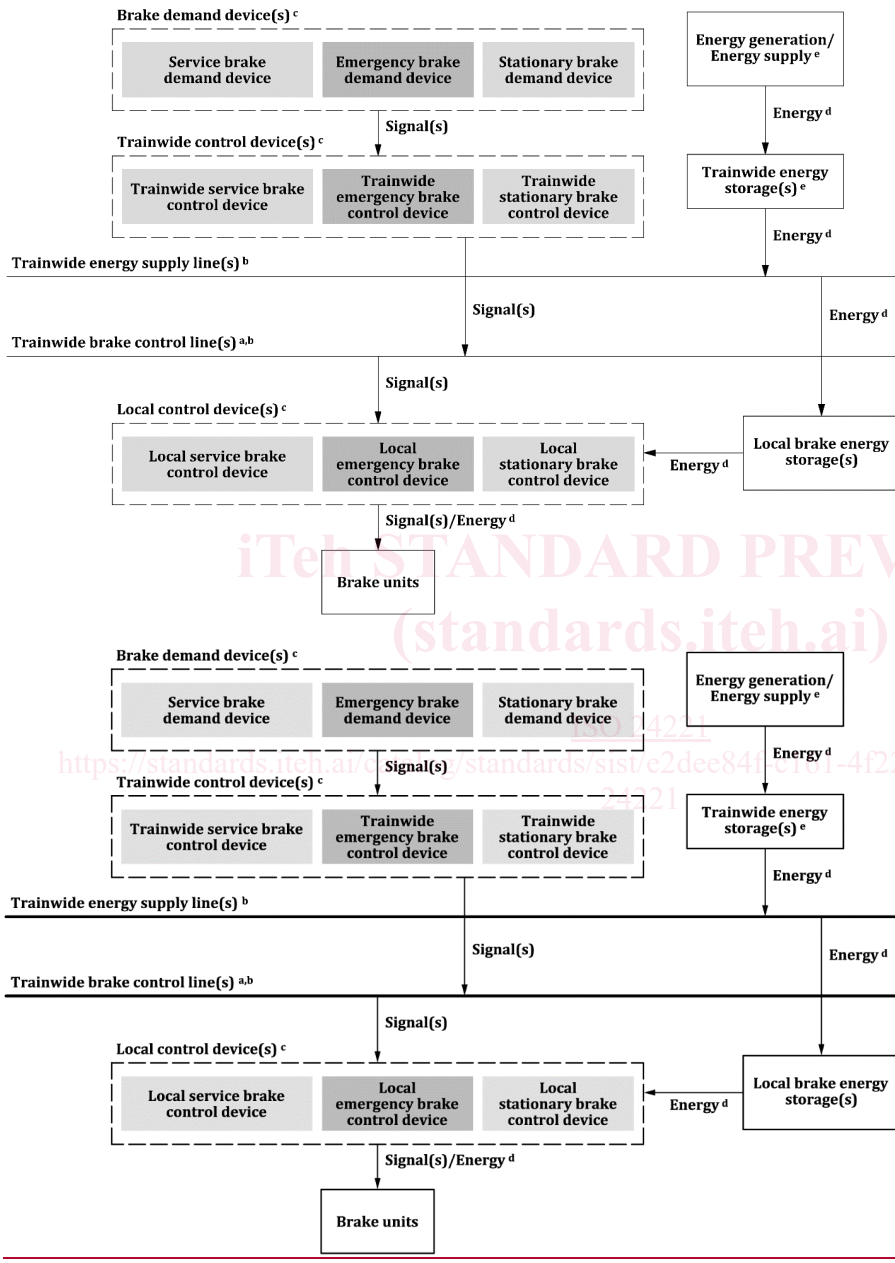

ISO/FDIS 24221:2023(E)

- a) Discrete trainwide brake control lines for service brake control, emergency brake control and stationary brake control are also possible.
- b) For some applications, the trainwide energy supply line and the trainwide brake control line can be combined (e.g. brake pipe).
- c) Depending on technological implementation, one or more boxes can be combined and correspond to a single device.
- d) Different types of energy can be used simultaneously, e.g. pneumatic, electric, hydraulic.
- e) Energy generation / energy supply and trainwide energy storages are not dedicated to braking purpose only and are not considered as part of the brake system.

Figure 1 — General structure of the main brake system

7.3.24.3.2 General functions on train level

7.3.24.3.2.1 Brake control functions

The brake control functions on train level are:

- a) The train shall be equipped at least with one trainwide brake control line (e.g. pneumatic brake pipe, electrical emergency brake loop).
- b) The train shall be equipped with local brake control devices which are connected to the trainwide brake control line.
- c) All brake units intended to be used for emergency braking shall be controlled by each trainwide emergency brake control line.
- d) Brake units intended to be used for service braking shall be controlled at least by a trainwide service brake control line (e.g. hard wired, data bus). A trainwide service brake control line can be combined with a trainwide emergency brake control line.

It is permitted to use brake units for both, emergency and service braking.

7.3.24.3.2.2 Automatic brake application

In order to achieve the automatic brake function, the main brake system shall be designed using a “fail-safe” principle for an emergency brake application. This is generally achieved by de-energizing the trainwide emergency brake control line to command the emergency brake application.

If a separate trainwide brake control line is used for service brake control only, this does not need to achieve the automatic brake function.

7.3.24.3.2.3 Graduable brake application and release

The main brake system shall be capable of transmitting a graduable trainwide service brake control signal.

If the train is equipped with several service brake demand devices (e.g. several driving cabs, ATO system), no more than one service brake demand device shall be able to transmit a demand on the train at any time in operation.

The main brake system shall be capable of achieving at least seven levels of increasing service brake application (from brakes released up to and including full service brake application).

The provision of direct release or graduable release of the service brake applications depends on local applicable regulations.

NOTE The graduability ~~could~~ be ~~realised~~ realized by a time- or position-dependent service brake demand device.

7.3.2.4.3.2.4 Emergency brake demand devices

The main brake system can include different emergency brake demand devices dedicated to specific purposes, for example, derailment detection system, on-board temperature monitoring of axle bearings, "dead man" system.

The emergency braking performance shall be assessed with the emergency brake demand device that is the slowest to generate the trainwide emergency brake control signal(s). It applies to all emergency brake demand devices that can be used by the driver and to train control systems or to train protection systems but not to passenger activated systems.

If a type of emergency brake demand is realized by the action of multiple trainwide emergency brake control devices, then the emergency braking performance shall be assessed in the less favourable configuration allowed in operation without restriction. For example, with a train equipped with a pneumatic trainwide emergency brake control line, if a type of emergency brake demand is done by opening two valves and the train is allowed to operate with one of these two valves isolated without restrictions, the venting performance is assessed with only one valve opening.

NOTE The slowest device to generate the trainwide emergency brake control signal is the one for which the stopping distance is the longest.

7.3.2.5.3.2.5 Stationary braking

7.3.2.5.3.2.5.1 General

Stationary braking shall provide the functions to keep a train stationary either for a certain period of time or permanently when it is not in operation, with or without any energy replenishment.

Stationary braking is used for the following functions:

- holding (see ISO 24478:20222023, 3.4.5);
- immobilizing (see ISO 24478:20222023, 3.4.6);
- parking (see ISO 24478:20222023, 3.4.7).

7.3.2.5.3.2.5.2 Holding

The holding function shall be able to:

- secure the train at standstill during a temporary stop (e.g. in a station, in front of a signal),
- secure the train on a gradient during a hill start (anti-roll back brake).

NOTE 1 The holding function is only intended to be active when the train is at standstill following an application of the service brake or emergency brake.

NOTE 2 The holding function can be provided by either the leading rail vehicle and/or by the locomotive alone, or both.

NOTE 3 The holding function can be simultaneously applied with a traction demand (anti-roll back brake, hill start).

NOTE 4 The brake system energy used can be replenished whilst/while the holding function is in use.

~~7.3.2.5.3~~ 7.3.2.5.3 Immobilizing

The immobilizing function shall be able to hold a train stationary under specified load conditions for a defined period of time and on a defined gradient using just the brake system energy stored on the train without replenishment.

NOTE 1 The immobilizing function is active when the train is at standstill following an application of the service brake or emergency brake.

NOTE 2 The immobilizing function is normally considered with a train at its maximum load, on the maximum gradient of the line and for at least two hours for vehicles/units/trains carrying passengers, at least 30 ~~minutes~~ min for other types of trains.

NOTE 3 It is permitted to substitute the immobilization brake function by the parking brake, if this can achieve the required performance.

~~7.3.2.5.4~~ 7.3.2.5.4 Parking

The parking function shall be able to hold a rail vehicle/unit/train stationary under specified load conditions for an indefinite period of time until intentionally released and on a defined gradient without replenishment of the brake system energy.

Additional external devices, e.g. scotches, can be used to supplement the parking brake, in case the defined conditions (e.g. gradient, load) are exceeded.

NOTE 1 The parking function can be used for the immobilizing function.

NOTE 2 Additional external devices ~~could~~ can be stored on board or made available at dedicated locations on the network (e.g. freight yard).

~~7.3.2.6~~ 7.3.2.6 ~~Check of~~ Checking the brake functionality

As a minimum, the following functions and features of the brake system shall be capable of being checked:

- the continuity of the trainwide emergency brake control line along the whole train;
- the availability of the braking energy supply along the train;
- the status of the parking brake (applied, released and optionally isolated);
- the initiation of the trainwide emergency brake control signal for each emergency brake demand device;
- the application of the brake units initiated by an emergency brake demand;
- the status of the emergency brake units (applied, released or isolated);
- the initiation of the trainwide service brake control signal for each service brake demand device;
- the application of the brake units initiated by a service brake demand;
- the full release of the brake units when commanded;
- the status (on/off) of the wheel slide protection system (WSP), if fitted.