

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
24221

ISO/TC 269/SC 2

Secretariat: AFNOR

Voting begins on:
2023-07-27

Voting terminates on:
2023-09-21

Railway applications — Braking system — General requirements

*Applications ferroviaires — Système de freinage — Exigences
générales*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24221

<https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-24221>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 24221:2023(E)

© ISO 2023

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24221

<https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-24221>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements	2
4.1 General requirements of the brake systems.....	2
4.2 General safety requirements.....	3
4.3 Requirements for the main brake system.....	3
4.3.1 General requirements.....	3
4.3.2 General functions on train level.....	5
4.3.3 Additional requirements at the vehicle level.....	8
4.4 Brake management / brake blending.....	8
4.5 Additional brake systems.....	9
4.5.1 General.....	9
4.5.2 Independent dynamic braking.....	9
4.5.3 Independent direct brake for locomotives and traction units.....	10
4.6 Wheel slide protection.....	12
4.7 Enhancement of wheel/rail adhesion.....	13
4.8 Compatibility for rescue purposes.....	14
5 Calculation requirements	14
5.1 General aspects.....	14
5.2 Performance calculation.....	14
5.2.1 General.....	14
5.2.2 Calculations for degraded mode.....	15
5.3 Relevant load conditions.....	15
5.4 Service braking.....	15
5.5 Thermal capacity.....	16
5.5.1 General.....	16
5.5.2 Conditions.....	16
5.5.3 Structural integrity of the brake components.....	16
5.5.4 Stopping distance extension.....	17
5.5.5 Duty cycle.....	17
5.6 Wheel/rail adhesion.....	18
5.7 Parking brake.....	18
Annex A (informative) Automatic air brake system	19
Annex B (informative) Wheel/rail adhesion demand levels applied in Europe	21
Annex C (informative) Relationship between this document and local regulations in Japan	23
Bibliography	24

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 269, *Railway applications*, Subcommittee SC 2, *Rolling stock*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Railway applications — Braking system — General requirements

1 Scope

This document specifies the general requirements for brake systems. This document focuses on general principles and general requirements of brake systems.

This document is applicable for all types of rolling stock during design and whole lifetime. This document does not specify the braking performance criteria.

This document can be applied to all rolling stock with metal to metal wheel/rail contact irrespective of speed classification.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4975, *Railway applications — Braking system — Quality of compressed air for pneumatic apparatus and systems*

ISO 10516, *Railway application — Vehicle reference masses*¹⁾

ISO 20138 (all parts), *Railway applications — Calculation of braking performance (stopping, slowing and stationary braking)*

ISO 24478, *Railway applications — Braking — Generic vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 24478 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

general operation

mode of operation of units intended to be coupled with other units in a train formation which is not defined at design stage

3.2

assessment

process of judging or deciding the amount, value, quality or importance of something

3.3

testing

process of using or trying something to see if it works, is suitable or obeys the rules

1) Under preparation. Stage at the time of publication: ISO/CD 10516:2023.

**3.4
verification**

process of proving that something exists or is true, or to make certain that something is correct

**3.5
nominal condition**

given set of conditions (e.g. dry rail, straight and level track) used to determine the braking performance without safety margin or a confidence level

**3.6
normal mode**

operating condition with all expected brakes available and performing as specified

Note 1 to entry: Some brake units can be intentionally isolated.

**3.7
degraded mode**

operating condition where some of the brakes are not available and/or not performing as specified (e.g. equipment failure, leakage)

**3.8
degraded condition**

external factor adversely affecting the braking performance (e.g. low wheel/rail adhesion, wind, ice, snow)

**3.9
maximum braking load**

load condition corresponding to the maximum mass of payload for braking purposes

4 Requirements

4.1 General requirements of the brake systems

The purpose of the main brake system is to ensure that the train can be slowed, the train speed can be maintained on a slope, the train can be stopped and immobilized when it is stopped.

Brake systems shall enable service brake application, emergency brake application and stationary braking.

Brake systems may include additional applications, e.g. safety brake application, earthquake application.

Rail vehicles/units designed and intended to be coupled and operated together shall be fitted with a compatible brake system to ensure the brake function in all vehicles/units of the train.

Brake systems may include functions which temporarily apply traction and brake at the same time (e.g. snow brake, hill start).

Self-propelled special vehicles in their running mode generally follow the requirements for locomotives. Special vehicles that are hauled in their running mode generally follow the requirements for freight vehicles.

NOTE 'Special vehicles' are machines which include infrastructure inspection machines and on-track machines (OTMs).

The brake system can incorporate the ability to adjust the braking force depending on the load of the rail vehicle/unit/train.

In brake systems using compressed air, the minimum air quality shall comply with ISO 4975.

More detailed information about automatic air brake systems is given in [Annex A](#).

Information about certain national requirements for brake systems is given in [Annex C](#).

4.2 General safety requirements

If a trainwide control signal for an emergency brake application is sent, no single failure in the main brake system shall result in a loss of more than 50 % of the total braking force of the train.

Any brake application signal on a service or emergency trainwide brake control line shall always cancel any traction demand.

After a control signal for a parking brake application is sent, no single failure in the brake system shall result in the complete and permanent loss of the stationary braking force of the train.

The emergency brake function of a train shall be automatic. Any inadvertent disruption of the trainwide emergency brake control line (e.g. loss of integrity resulting from an unintended train separation caused by a mechanical failure) shall immediately lead to a trainwide control signal for an emergency brake application to all vehicles from the train.

There shall be sufficient braking energy available on board the train, from the minimum stored energy distributed along the train appropriately for the design of the brake system, to ensure at least one emergency brake application capable of stopping the train from its maximum speed in any loading condition. The local energy storage shall take into account the consumption of energy by the wheel slide protection (WSP) system under degraded conditions during emergency braking (this is sometimes referred to as inexhaustibility).

Any emergency brake demand shall lead immediately to a trainwide brake control signal for an emergency brake application and take priority over any existing brake and/or traction demand [see [4.3.2.1 a\) to d\)](#)].

The cancellation of an emergency brake demand shall not lead to an automatic release of the brake. The release of an emergency brake application shall require an intentional operational demand for example by the driver or by automatic train control system.

The propagation speed of the trainwide emergency brake control signal shall be not less than 250 m/s.

4.3 Requirements for the main brake system

4.3.1 General requirements

A main brake system shall provide, as a minimum, the following functions:

- emergency brake application and release;
- service brake application and release;
- stationary brake application and release.

A brake demand for a brake application shall always have priority over a brake demand for a brake release that may have already been initiated.

To achieve these functions, a main brake system generally incorporates the following features:

- trainwide brake control device(s);
- brake demand devices (driver's cab equipment, control command signalling equipment, etc.);
- trainwide brake control line(s);
- local brake control device(s);
- brake units;


- monitoring and display of the brake status;
- distributed energy storage for braking force generation.

For further explanations on devices and signals, see ISO 24478:2022, Annex D.

When a trainwide energy supply line is used that is separate from any trainwide brake control lines, it is permitted for this energy supply line also to supply energy to other systems.

The energy in a trainwide brake control line and local brake energy storage shall not be used for other purposes than for the brake.

The general structure of a main brake system is shown in [Figure 1](#).

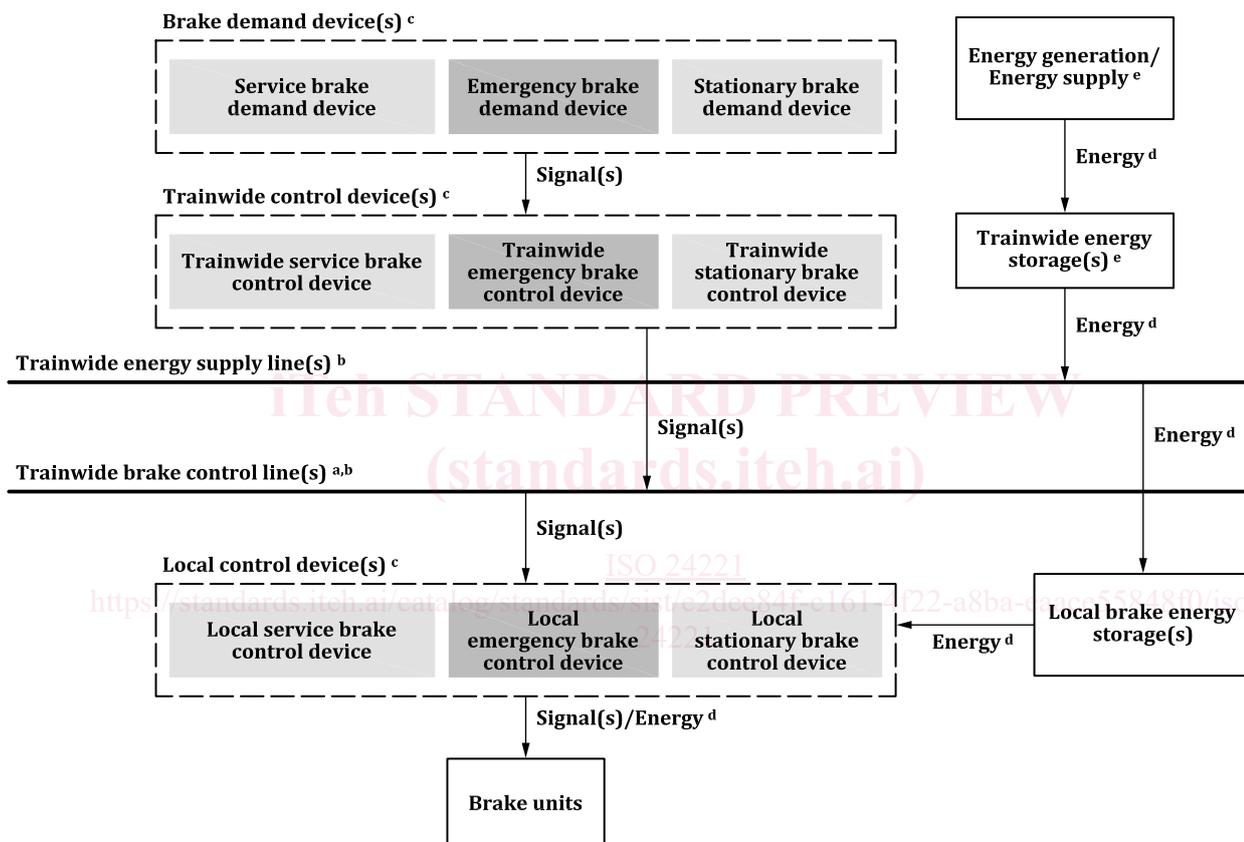

- ^a Discrete trainwide brake control lines for service brake control, emergency brake control and stationary brake control are also possible.
- ^b For some applications, the trainwide energy supply line and the trainwide brake control line can be combined (e.g. brake pipe).
- ^c Depending on technological implementation, one or more boxes can be combined and correspond to a single device.
- ^d Different types of energy can be used simultaneously, e.g. pneumatic, electric, hydraulic.
- ^e Energy generation / energy supply and trainwide energy storages are not dedicated to braking purpose only and are not considered as part of the brake system.

Figure 1 — General structure of the main brake system

4.3.2 General functions on train level

4.3.2.1 Brake control functions

The brake control functions on train level are:

- a) The train shall be equipped at least with one trainwide brake control line (e.g. pneumatic brake pipe, electrical emergency brake loop).
- b) The train shall be equipped with local brake control devices which are connected to the trainwide brake control line.
- c) All brake units intended to be used for emergency braking shall be controlled by each trainwide emergency brake control line.
- d) Brake units intended to be used for service braking shall be controlled at least by a trainwide service brake control line (e.g. hard wired, data bus). A trainwide service brake control line can be combined with a trainwide emergency brake control line.

It is permitted to use brake units for both, emergency and service braking.

4.3.2.2 Automatic brake application

In order to achieve the automatic brake function, the main brake system shall be designed using a “fail-safe” principle for an emergency brake application. This is generally achieved by de-energizing the trainwide emergency brake control line to command the emergency brake application.

If a separate trainwide brake control line is used for service brake control only, this does not need to achieve the automatic brake function.

4.3.2.3 Graduable brake application and release

The main brake system shall be capable of transmitting a graduable trainwide service brake control signal.

If the train is equipped with several service brake demand devices (e.g. several driving cabs, ATO system), no more than one service brake demand device shall be able to transmit a demand on the train at any time in operation.

The main brake system shall be capable of achieving at least seven levels of increasing service brake application (from brakes released up to and including full service brake application).

The provision of direct release or graduable release of the service brake applications depends on local applicable regulations.

NOTE The graduability can be realized by a time- or position-dependent service brake demand device.

4.3.2.4 Emergency brake demand devices

The main brake system can include different emergency brake demand devices dedicated to specific purposes, for example, derailment detection system, on-board temperature monitoring of axle bearings, “dead man” system.

The emergency braking performance shall be assessed with the emergency brake demand device that is the slowest to generate the trainwide emergency brake control signal(s). It applies to all emergency brake demand devices that can be used by the driver and to train control systems or to train protection systems but not to passenger activated systems.

If a type of emergency brake demand is realized by the action of multiple trainwide emergency brake control devices, then the emergency braking performance shall be assessed in the less favourable configuration allowed in operation without restriction. For example, with a train equipped with a

pneumatic trainwide emergency brake control line, if a type of emergency brake demand is done by opening two valves and the train is allowed to operate with one of these two valves isolated without restrictions, the venting performance is assessed with only one valve opening.

NOTE The slowest device to generate the trainwide emergency brake control signal is the one for which the stopping distance is the longest.

4.3.2.5 Stationary braking

4.3.2.5.1 General

Stationary braking shall provide the functions to keep a train stationary either for a certain period of time or permanently when it is not in operation, with or without any energy replenishment.

Stationary braking is used for the following functions:

- holding (see ISO 24478:2023, 3.4.5);
- immobilizing (see ISO 24478:2023, 3.4.6);
- parking (see ISO 24478:2023, 3.4.7).

4.3.2.5.2 Holding

The holding function shall be able to:

- secure the train at standstill during a temporary stop (e.g. in a station, in front of a signal),
- secure the train on a gradient during a hill start (anti-roll back brake).

NOTE 1 The holding function is only intended to be active when the train is at standstill following an application of the service brake or emergency brake. [ISO 24221](https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-caace55848f0/iso-24221)

NOTE 2 The holding function can be provided by either the leading rail vehicle or the locomotive alone, or both. <https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-caace55848f0/iso-24221>

NOTE 3 The holding function can be simultaneously applied with a traction demand (anti-roll back brake, hill start).

NOTE 4 The brake system energy used can be replenished while the holding function is in use.

4.3.2.5.3 Immobilizing

The immobilizing function shall be able to hold a train stationary under specified load conditions for a defined period of time and on a defined gradient using just the brake system energy stored on the train without replenishment.

NOTE 1 The immobilizing function is active when the train is at standstill following an application of the service brake or emergency brake.

NOTE 2 The immobilizing function is normally considered with a train at its maximum load, on the maximum gradient of the line and for at least two hours for vehicles/units/trains carrying passengers, at least 30 min for other types of trains.

NOTE 3 It is permitted to substitute the immobilization brake function by the parking brake, if this can achieve the required performance.

4.3.2.5.4 Parking

The parking function shall be able to hold a rail vehicle/unit/train stationary under specified load conditions for an indefinite period of time until intentionally released and on a defined gradient without replenishment of the brake system energy.

Additional external devices, e.g. scotches, can be used to supplement the parking brake, in case the defined conditions (e.g. gradient, load) are exceeded.

NOTE 1 The parking function can be used for the immobilizing function.

NOTE 2 Additional external devices can be stored on board or made available at dedicated locations on the network (e.g. freight yard).

4.3.2.6 Checking the brake functionality

As a minimum, the following functions and features of the brake system shall be capable of being checked:

- the continuity of the trainwide emergency brake control line along the whole train;
- the availability of the braking energy supply along the train;
- the status of the parking brake (applied, released and optionally isolated);
- the initiation of the trainwide emergency brake control signal for each emergency brake demand device;
- the application of the brake units initiated by an emergency brake demand;
- the status of the emergency brake units (applied, released or isolated);
- the initiation of the trainwide service brake control signal for each service brake demand device;
- the application of the brake units initiated by a service brake demand;
- the full release of the brake units when commanded;
- the status (on/off) of the wheel slide protection system (WSP), if fitted.

<https://standards.iteh.ai/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso->

4.3.2.7 Brake status monitoring when running

When running, the brake system shall provide the following information for brake status monitoring:

- the level of the trainwide service brake control line(s) and the status of the trainwide emergency brake control line;
- the status, applied or released, of at least one service brake unit and one emergency brake unit (for example a part which is installed on the rail vehicle fitted with an active cab). The monitored brake unit can be used for both emergency brake and service brake application;
- the level (e.g. voltage, pressure) of the trainwide energy supply line to the distributed energy storage for braking force generation;
- the availability and status, applied or released, of other brake systems if they can be used independently of the main brake system (e.g. dynamic brake).

NOTE The brake status is generally presented to the driver at the normal driving position in the active cab/ remote cab and/or to an automatic train control system.

It is recommended that the parking brake units are equipped with means to detect when a parking brake is not released and provide a message to the driver.

4.3.3 Additional requirements at the vehicle level

4.3.3.1 Emergency brake demand device

When the vehicle is equipped with one or more driving cab(s), each driving cab shall include at least two independent emergency brake demand devices accessible by the driver when in the normal driving position. If operation takes place with a second staff member in the cab, it is acceptable for one of the emergency brake demand devices to be accessible by the second staff member in normal position.

NOTE 1 One of the emergency brake demand devices is usually incorporated in the driver's brake demand device.

NOTE 2 One of the emergency brake demand devices is usually activated by a red push button (mushroom button).

NOTE 3 For the purpose of this subclause a safety brake demand device can be considered to be an emergency brake demand device.

4.3.3.2 Braking capability

The brake system of each rail vehicle or unit shall be designed so that it is capable of braking the mass of the vehicle or unit with the required performance in all load conditions. However, if it is intended to operate trains incorporating partially braked or unbraked rail vehicles without speed restriction, the other rail vehicles shall be designed to accept a higher braking duty (thermal capacity) so that the train as a whole can be braked with the required performance in all load conditions.

Each rail vehicle of the train shall be capable of dissipating the braking energy so that, when operated in accordance with the vehicle instructions, no damage occurs to the components generating the braking forces (e.g. overheating of friction surfaces) or to the surrounding parts of the vehicle or the infrastructure.

Thermal capacity requirements are set out in [5.5](https://standards.iso.org/standards/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-24221). ISO 24221
https://standards.iso.org/standards/catalog/standards/sist/e2dee84f-c161-4f22-a8ba-eaace55848f0/iso-

NOTE 1 The design of the surrounding parts of the rail vehicle and the infrastructure is outside the scope of this document but needs to take into account the operating characteristics of the brake system.

NOTE 2 Defining the actual performance is not in the scope of this document.

4.3.3.3 Application of manual effort

The manual effort to activate handles, levers shall be subject to an ergonomic assessment.

Any manual parking brake shall be designed so it can be fully applied with an application force at the mechanical interface (hand brake wheel, lever, etc.) not exceeding 500 N. It is recommended to use a lower target value when designing parking brake arrangements.

NOTE 1 In Europe, the recommended maximum application force is 250 N.

NOTE 2 In Japan, the recommended maximum application force is 294 N by one hand or 441 N by both hands according to technical regulatory standards on Japanese railways, article 69 and the approved model specifications (see Reference [22]).

4.4 Brake management / brake blending

Brake blending can take place at either the vehicle level or train level, or both.

Brake blending normally means that more than one brake system may act simultaneously.