
Fire safety engineering — Verification and validation protocol for building fire evacuation models

Ingénierie de la sécurité incendie — Protocole de vérification et de validation de modèles d'évacuation dans un bâtiment en cas d'incendie

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/aa2f373f-1487-479a-98cf-17d746f3f8db/iso-prf-20414>

PROOF / ÉPREUVE



iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/aa2f373f-b4e7-479a-98cf-17d746f3f8db/iso-prf-20414>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Documentation	5
4.1 General.....	5
4.2 Technical documentation.....	6
4.3 User's manual.....	8
5 Verification	9
5.1 General.....	9
5.2 Basic components.....	11
5.3 Behavioural components.....	24
5.4 Fire-people interaction components.....	29
5.5 Building-specific components.....	31
6 Validation	35
6.1 General.....	35
6.2 Methods for the analysis of results.....	36
6.3 Component validation.....	40
6.4 Global validation.....	45
7 Review of the theoretical and experimental basis of probabilistic models	46
8 Quality assurance	47
9 Quantification of uncertainty	48
10 Acceptance criteria	50
Annex A (informative) Reporting Template	51
Annex B (informative) Examples of application	54
Bibliography	63

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 92, *Fire safety*, Subcommittee SC 04, *Fire safety engineering*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The objective of fire safety engineering is to assist in the achievement of an acceptable predicted level of fire safety. Part of this work involves the use of calculation methods and models to predict human behaviour in case of a fire. Evacuation analyses are performed to mitigate the adverse effects of a fire on people. The main principles that are necessary for establishing credibility of these evacuation models are verification and validation. This document addresses the procedures for verification and validation of evacuation models. The context of applications addressed in this document is building fires.

Evacuation models are applied to establish the time for an evacuating population to reach a place of safety. Evacuation models are also used to examine evacuation dynamics of different scenarios and to evaluate the effectiveness of procedural solutions.

Evacuation models present different levels of sophistication, ranging from simplified methods (such as capacity analysis or flow calculations) to complex computational agent-based models. Microscopic models represent evacuees in computer models as agents. Each evacuee is represented by an autonomous agent with certain properties, e.g. pre-evacuation time and walking speed. A crowd is built up of a group of agents acting together in a multi-agent-based evacuation model. Agents act according to behavioural rules defined in the model. These rules can represent agent-to-agent or agent-to-environment interactions. The macroscopic approach instead represents a crowd at an aggregate level, generally adopting analogies with other physical systems (e.g. hydraulic flows). In addition, in relation to their modelling assumptions in terms of space representation (coarse or fine network approach, continuous approach or hybrid), evacuation models are capable of representing geometries with a different level of accuracy.

Evacuation models operate at three main levels when they produce results, namely 1) Individual Level, 2) Aggregate Level and 3) Scenario level. The individual level deals with the simulation of the actions performed by each agent. The aggregate level concerns the interactions between agents or the interaction between agents and simulated objects which can influence the local conditions. The scenario level relates to the results that summarize the conditions at the end of the simulation, i.e. the final outcome of the model and the layout in which the evacuation takes place.

Potential users of evacuation models and those who are asked to accept the results need to be assured that these models provide sufficiently accurate predictions of human behaviour in fire. To provide this assurance, evacuation models being considered need to be verified for accuracy and validated for capability to reproduce the phenomena. A rigorous verification and validation process are a key element of quality assurance.

There is no fixed requirement of accuracy that is applicable to all possible applications of evacuation models. The accuracy level depends on the purposes for which an evacuation model is to be used. It is not necessary that all evacuation models demonstrate high accuracy in all their components as long as the error, uncertainty and limits of applicability of the models are known. The accuracy of the evacuation model predictions is also highly dependent on the competency of the user, e.g. model configuration, data input selection, results interpretation.

This document focuses on the predictive accuracy of evacuation models. However, other factors such as ease of use, relevance, completeness and status of development play an important role in the assessment of the use of the most appropriate model for a particular application. The assessment and suitability of evacuation models for the simulation of human behaviour in fire in several contexts of applications is supported by the use of a quality-assurance methodology to ensure that the requirements are being fulfilled. Tests and methods for measuring attributes of the relevant model characteristics are outlined in this document.

This document is complementary to ISO 16730-1, in which the procedures and requirements for verification and validation of calculation methods in fire safety engineering are addressed at a general level. This document should also be used in parallel with the relevant ISO documents in which design scenarios are discussed (ISO 16733-1 and ISO/TS 29761).

This document is intended to have the following users:


- a) Conceptual model developers (individuals or organizations that perform development activities, including requirements analysis, design and testing of components): These users can use this document to document the usefulness of a particular fire evacuation model for building applications. Part of the model development process includes the identification of precision and limitations of applicability, and independent testing.

NOTE Model developers generally have access to more model components than a user, given their work in the model development phase.

- b) Software model developers (individuals or organizations that maintain computer models, supply computer models, and those who evaluate computer model quality as part of quality assurance and quality control): These users can use this document to document the software features and capabilities and to assure users that an appropriate testing protocol is followed to ensure quality of the application tools by documenting the verification and validation of the model pursuant to this document,
- c) Model users (individuals or organizations that use evacuation models to perform a fire safety analysis): These users can use models verified and validated pursuant to this document to assure themselves that they are using an appropriate model for a particular application and that it provides adequate accuracy.
- d) Developers of performance codes and standards: These users can use this document to specify the verification and validation procedure for evacuation models used in fire safety designs for a given set of applications.
- e) Approving bodies/officials (individuals or organizations that review or approve the use of evacuation models): These users can use this document as a basis to ensure that the results submitted show clearly that the evacuation model is used within its applicability limits and has an acceptable level of accuracy.
- f) Educators: These users can use this document to demonstrate the application and acceptability of evacuation models being taught.

General principles are described in ISO 23932-1, which provides a performance-based methodology for engineers to assess the level of fire safety for new or existing built environments. Fire safety is evaluated through an engineered approach based on the quantification of the behaviour of fire and knowledge of the consequences of such behaviour on life safety, property and the environment. ISO 23932-1 provides the process (necessary steps) and essential elements to design a robust performance-based fire safety programme.

ISO 23932-1 is supported by a set of fire safety engineering International Standards on the methods and data required to undertake the steps in a fire safety engineering design as summarized in ISO 23932-1 and shown in [Figure 1](#) (taken from ISO 23932-1). This set of International Standards is referred to as the Global fire safety engineering analysis and information system. This global approach and system of standards provides an awareness of the interrelationships between fire evaluations when using the set of fire safety engineering International Standards.

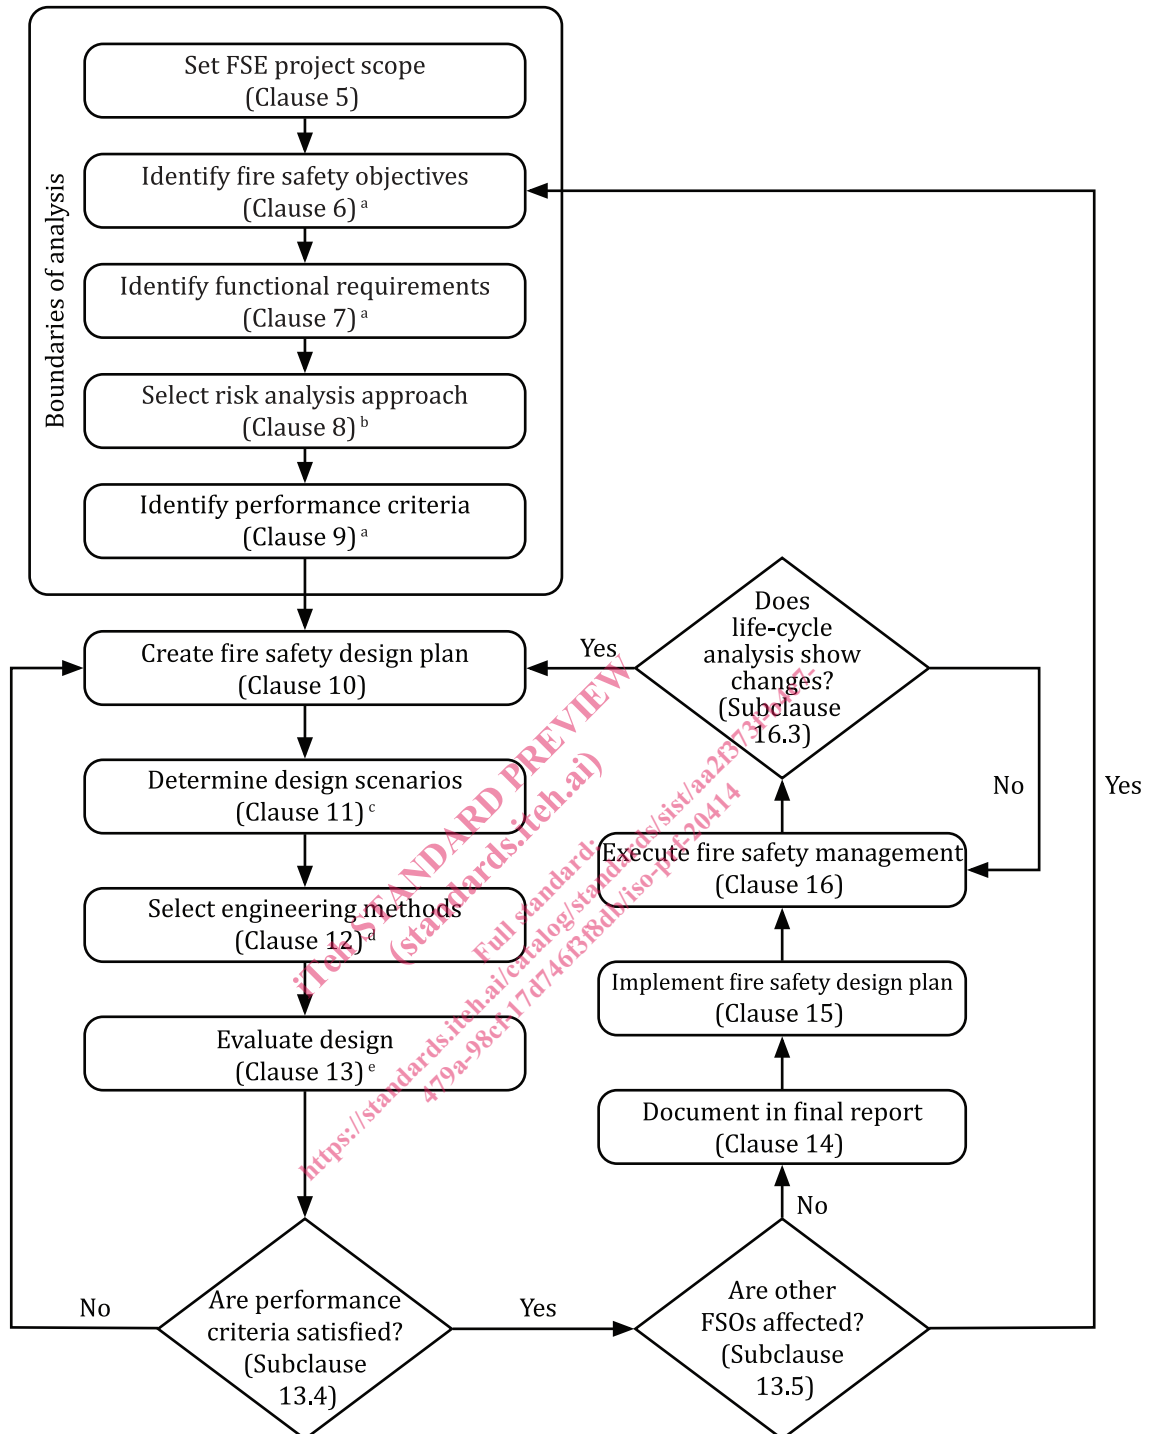

Key

- a See also ISO/TR 16576 (Examples).
- b See also ISO 16732-1, ISO 16733-1, ISO/TS 29761.
- c See also ISO 16732-1, ISO 16733-1, ISO/TS 29761.
- d See also ISO/TS 13447, ISO 16730-1, ISO/TR 16730-2 to 5 (Examples), ISO 16734, ISO 16735, ISO 16736, ISO 16737, ISO/TR 16738, ISO 24678-6.
- e See also ISO/TR 16738, ISO 16733-1.

Figure 1 — Flow chart of the fire safety engineering process

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/aa2f373f-b4e7-479a-98cf-17d746f3f8db/iso-prf-20414>

Fire safety engineering — Verification and validation protocol for building fire evacuation models

1 Scope

This document describes a protocol for the verification and validation of building fire evacuation models. This document mostly addresses evacuation model components as they are in microscopic (agent-based) models. Nevertheless, it can be adopted (entirely or partially) for macroscopic models if the model is able to represent the components under consideration.

The area of application of the evacuation models discussed in this document includes performance-based design of buildings and the review of the effectiveness of evacuation planning and procedures. The evacuation process is represented with evacuation models in which people's movement and their interaction with the environment make use of human behaviour in fire theories and empirical observations^[5]. The simulation of evacuation is represented using mathematical models and/or agent-to-agent and agent-to-environment rules.

The area of application of this document relates to buildings. This document is not intended to cover aspects of transportation systems in motion (e.g. trains, ships) since specific ad-hoc additional tests may be required for addressing the simulation of human behaviour during evacuation in these types of systems^[6].

This document includes a list of components for verification and validation testing as well as a methodology for the analysis and assessment of accuracy associated with evacuation models. The procedure for the analysis of acceptance criteria is also included.

A comprehensive list of components for testing is presented in this document, since the scope of the testing has not been artificially restricted to a set of straightforward applications. Nevertheless, the application of evacuation models as a design tool can be affected by the numbers of variables affecting human behaviour under consideration. A high number of influences can hamper the acceptance of the results obtained given the level of complexity associated with the results. Simpler calculation methods, such as macroscopic models, capacity analyses or flow calculations, are affected to a lower extent by the need to aim at high fidelity modelling. In contrast, more sophisticated calculation methods (i.e. agent-based models) rely more on the ability to demonstrate that the simulation is able to represent different emergent behaviours. For this reason, the components for testing are divided into different categories, enabling the evacuation model tester to test an evacuation model both in relation to the degree of sophistication embedded in the model as well as the specific scope of the model application.

In [Annex A](#), a reporting template is provided to provide guidance to users regarding a format for presenting test results and exemplary application of verification and validation tests are presented in [Annex B](#).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 16730-1, *Fire safety engineering — Procedures and requirements for verification and validation of calculation methods — Part 1: General*

ISO 13943, *Fire safety — Vocabulary*

ISO/IEC 25000, *Systems and software engineering — Systems and software Quality Requirements and Evaluation (SQuaRE) — Guide to SQuaRE*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13943 and ISO 16730-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1 acceptance criteria

criteria that form the basis for assessing the acceptability of the safety of a design of a *building* (3.8)

Note 1 to entry: The criteria can be qualitative, quantitative or a combination of both.

[SOURCE: ISO 13943:2017, 3.3 — modified]

3.2 accuracy

degree of exactness actually possessed by an approximation, measurement, etc.

Note 1 to entry: Accuracy includes *error* (3.19) and uncertainty.

3.3 agent

simulated *occupants* in an *agent-based model* (3.4)

3.4 agent-based model

computational model for simulating the actions and interactions of autonomous *agents* (3.3) using a set of rules

3.5 arrival time

time interval between the time of a warning of fire being transmitted to each occupant and the time at which each individual occupant of a specified part of a *building* (3.8) or all of the building is able to enter a place of safety

3.6 assessment

process of determining the degree to which an *evacuation model* (3.20) is an accurate representation of the real world from the perspective of the intended uses of the model and the degree to which the model implementation accurately represents the developer's conceptual description of the model and the solution to the modelling approach

Note 1 to entry: Key processes in the assessment of suitability of a calculation method are *verification* (3.37) and *validation* (3.36).

3.7 behavioural uncertainty

uncertainty in evacuation scenarios associated with the impact of *human behaviour in fire* (3.24) during evacuation

3.8 building

structure or edifice intended for different uses

Note 1 to entry: Examples of uses include residential, offices, hotels, shopping malls, industrial premises, hospitals, arenas, theatres, exhibition halls, train stations, etc.

3.9 calibration

process of adjusting modelling parameters in a computational model for the purpose of improving agreement with experimental data

[SOURCE: ISO 13943:2017, 3.42 — modified]

3.10 component testing

process of checking that the components of a model work as intended

3.11 computer model

operational computer programme that implements a conceptual model

3.12 crowd

occupants or *agents* (3.3) whose behaviour, in conjunction with the *environment* (3.18), influences those around them

3.13 default value

standard setting or state to be taken by the programme if no alternate setting or state is initiated by the system or the user

3.14 default setting

an initial condition or algorithm provided by a developer as part of the model software

3.15 density

the number of occupants divided by the available area pertinent to the space where the occupants are located

3.16 deterministic model

model that uses science-based mathematical expressions or rules to produce the same result each time the method is used with the same set of input data values

[SOURCE: ISO 13943:2017, 3.80 — modified]

3.17 emergent behaviour

behaviour which occurs due to the interactions among smaller or simpler entities which do not exhibit such properties themselves [e.g. *agents* (3.3)]

3.18 environment

conditions and surroundings that can influence the behaviour of an item or persons when exposed to fire

[SOURCE: ISO 13943:2017, 3.95 — modified]

3.19 error

recognizable deficiency in any phase or activity of calculation that is not due to lack of knowledge

[SOURCE: ISO 13943:2017, 3.98 — modified]

3.20 evacuation model

computer model (3.11) for the representation of *evacuation behaviour* (3.21)

3.21

evacuation behaviour

behaviour of the occupants (in the real world) or *agents* (3.3) (in a model) meant to directly or indirectly influence them to reach a place of safety

[SOURCE: ISO 13943:2017, 3.100 — modified]

3.22

evacuation time

time interval between the time of a warning of fire being transmitted to the occupants and the time at which the *occupant* population of a specified part of a *building* (3.8) or all of the building are able to enter a place of safety

[SOURCE: ISO 13943:2017, 3.101 — modified]

3.23

fire safety engineering

application of engineering methods based on scientific principles to the development or *assessment* (3.6) of designs in *buildings* (3.8) through the analysis of specific fire scenarios or through the quantification of risk for a group of fire scenarios

3.24

human behaviour in fire

actions performed in the event of a fire as a result of a behavioural or decision-making process (i.e. recognition of fire, way-finding, pre-evacuation, etc.)

3.25

macroscopic model

computer model (3.11) in which *occupant* movement is represented only at an aggregate level, based on computer-assisted algorithms

3.26

microscopic model

computer model (3.11) in which *agents* (3.3) perform autonomous movement based on individual parameters, capabilities and behavioural attitudes based on computer-assisted algorithms

3.27

model component

part which constitutes a model (i.e. a sub-model, algorithm or behavioural rule)

3.28

modelling

process of construction or modification of a model movement behaviour which enables occupants of a *building* (3.8) to reach a place of safety or safe refuge once they have begun to evacuate

3.29

occupant

person whose main physical characteristics are *walking speeds* (3.38) and body size

Note 1 to entry: *Evacuation models* (3.20) generally account for gender implicitly, i.e. as a consequence of the assumed body size and walking speeds. For this reason, gender is not explicitly mentioned in this document when referring to occupants.

3.30

performance-based design

design that is engineered to achieve specified objectives and *acceptance criteria* (3.1)

[SOURCE: ISO 13943:2017, 3.295 — modified]

3.31**pre-evacuation time**

time period after an alarm or fire cue is transmitted and before occupants first move (or travel) towards an exit

3.32**probabilistic model**

model that treats phenomena as a series of sequential events or states, with mathematical equations or rules to govern the transition from one event to another

Note 1 to entry: For example, from ignition to established burning, and probabilities assigned to each transfer point.

[SOURCE: ISO 13943:2017, 3.314 — modified]

3.33**route availability**

escape routes available to the occupants

3.34**simulation**

exercise or use of a calculation method to represent components of a system, their interaction and their progression over time

3.35**simulation model**

computer model ([3.11](#)) that treats the dynamic relationships that are assumed to exist in the real situation as a series of elementary operations on the appropriate variables

3.36**validation**

process of determining the degree to which a calculation method is an accurate representation of the real world from the perspective of the intended uses of the calculation method

[SOURCE: ISO 13943:2017, 3.416 — modified]

3.37**verification**

process of determining that a calculation method implementation accurately represents the developer's conceptual description of the calculation method and the solution to the calculation method

Note 1 to entry: The fundamental strategy of verification of computational models is the identification and quantification of *error* ([3.19](#)) in the modelling approach and its implementation.

[SOURCE: ISO 13943:2017, 3.419 — modified]

3.38**walking speed**

maximum uncongested speed at which individual evacuees move towards a place of safety

4 Documentation**4.1 General**

The technical documentation relating to testing should be sufficiently detailed so that all calculation results can be reproduced within the stated accuracy by an appropriately qualified independent individual or group. Sufficient documentation of calculation methods, including computer software, is essential for assessing the adequacy of the scientific and technical basis of the calculation methods, and the accuracy of computational procedures. Also, adequate documentation can assist in preventing the unintentional misuse of calculation methods. Reports on any verification and validation of a specific calculation method should become part of the documentation. The validity of a calculation method