

ISO #####-#:####(X)

Formatted: Line spacing: single

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF TR 24317

<https://standards.iteh.ai/catalog/standards/sist/235cb33a-d779-450e-b19a-461b11ad3958/iso-prf-tr-24317>

Formatted: Font: 11 pt

Formatted: Space Before: 0 pt, Line spacing: single

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11

Fax: +41 22 749 09 47

Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

Formatted: Left: 1.9 cm, Right: 1.9 cm, Bottom: 1 cm, Gutter: 0 cm, Header distance from edge: 1.27 cm, Footer distance from edge: 0.5 cm

Formatted: Indent: Left: 0 cm, Right: 0 cm, Space Before: 0 pt, No page break before, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Border: Top: (No border), Left: (No border), Right: (No border)

Formatted: French (France)

Formatted: French (France)

Formatted: French (France)

Formatted: zzCopyright address, Indent: Left: 0 cm, First line: 0 cm, Right: 0 cm, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Border: Left: (No border), Right: (No border)

Formatted: French (France)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF TR 24317

<https://standards.iteh.ai/catalog/standards/sist/235cb33a-d779-450e-b19a-461b11ad3958/iso-prf-tr-24317>

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Contents

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	1
3.1 Terms and definitions	1
3.2 Abbreviated terms	1
4 Vulnerable road users (VRUs)	2
4.1 VRUs in standardization	2
4.2 VRUs in the context of C-ITS	2
4.2.1 Overview	2
4.2.2 C-ITS safety processes	2
4.2.3 C-ITS view of VRU	4
4.3 Definitions and taxonomy	5
4.3.1 Overview	5
4.3.2 Definition of VRU	5
4.3.3 Classification for VRU/Devices	8
4.3.4 Profiles related to VRU classifications	11
4.4 Architecture	12
4.4.1 General	12
4.4.2 C-ITS role-based architecture	12
4.4.3 ITS-S VRU architecture model	14
4.4.4 Communications architectures and VRUs	18
4.5 Service packages and use cases	22
4.5.1 Relevant service packages	22
4.5.2 Relevant use cases	22
5 VRU needs and gaps	28
5.1 Overview	28
5.2 Use cases	29
5.2.1 General	29
5.2.2 VRU focused use cases	29
5.2.3 Infrastructure and vehicle-focused use cases	30
6 Next steps	31
Bibliography	32

Foreword	iv
Introduction	v
1 Scope	1

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

2 — Normative references — 1

3 — Terms and definitions — 1

3.1.1 — Definitions — 1

4 — Abbreviated terms — 1

5 — Vulnerable road users (VRU) — 3

5.1 — VRU in standardization — 3

5.2 — VRU in the Context of C-ITS — 3

5.2.1 — Overview — 3

5.2.2 — C-ITS safety processes — 3

5.2.3 — C-ITS view of VRU — 5

5.3 — Definitions and Taxonomy — 6

5.3.1 — Overview — 6

5.3.2 — Definition of VRU — 6

5.3.3 — Classification for VRU / Devices — 9

5.3.4 — Profiles related to VRU classifications — 13

5.4 — Architecture — 14

5.4.1 — General — 14

5.4.2 — C-ITS Role Based Architecture — 14

5.4.3 — ITS Station VRU Architecture Model — 15

5.4.4 — Communications Architectures and VRUs — 17

5.5 — Service Packages and Use Cases — 19

5.5.1 — Relevant Service Packages — 19

5.5.2 — Relevant Use Cases — 20

6 — VRU Needs and Gaps — 25

6.1 — Overview — 25

6.2 — Use Cases — 26

6.2.1 — General — 26

6.2.2 — VRU focused use cases — 26

6.2.3 — Infrastructure and Vehicle focused use cases — 27

7 — Next Steps — 27

Bibliography — 34

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/PRF TR 24317

https://standards.iteh.ai/catalog/standards/sist/235cb33a-c779-450e-b19a-461b11ad3958/iso-prf-tr-24317

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of a patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, Intelligent Transport Systems, transport systems.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Foreword Text

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font: Italic, Font color: Auto

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Introduction

In previous years, the development of intelligent transport system (ITS) standards has been focussed on road vehicles and supporting traffic and transport systems. Although provisions in respect of accessibility and accommodation of all travellers, including people with disabilities and older adults, have been taken into consideration, related requirements for ITS have not been accommodated, primarily because of the lack of the possibility to communicate for communicating electronically with these travellers.

The more recent focus on Mobility as a Service (MaaS), cooperative, connected and automated mobility (CCAM), and multimodal end-to-end journey planning and management, incorporate travel means such as active modes (e.g. bicycles) and micromobility vehicles (MMV) such as powered bicycles, powered scooters, Segways, powered boards, etc. Often, they also involve device sharing. End-to-end multimodal journeys often also include part of the journey on foot.

ITS service provision has, to date, tended to agglomerate standards for “road users”, “drivers”, “vehicles” and is largely focused on car drivers and the systems that control or assist them. Some attention has also been focused on public service and commercial vehicles. But another group of light vehicle mode users are Powered Two Wheeled Vehicle powered two-wheeled vehicle (P2WV) riders. With a few exceptions, there has been little appreciation of the different characteristics and behaviour of motorcycles, mopeds, trikes and quads and requirements that they have that differ from those for other categories.

These categories of conveyances and travellers, at the least, have needs to be communicated regarding ITS service provision. Conversely, many ITS services often need to communicate with, or be aware of the presence of, these actors. Yet, in previous years, there have generally not been any means to communicate for communicating with them individually.

However, during the last few years, smartphones, and other nomadic devices have not only become available, but are already indispensable for multimodal journeys and assist in ITS service provision. Smartphone technology is also often used in devices assisting. The advent of low-cost communications and cooperative technologies can also assist in the provision of services.

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

Formatted: No page break before

Formatted: Body Text

<https://standards.iteh.ai/catalog/standards/sist/235cb33a-c779-450e-b19a-461b11ad3958/iso-prf-tr-24317>

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Intelligent ~~transportation~~transport systems — Mobility ~~Integration — Gap analysis of standardization of C-ITS~~integration — ~~Mobility integration needs for vulnerable users and light mode conveyances and accessibility~~modes of transport

1 Scope

This document provides a review of mobility integration standardization efforts supporting all travellers using active and light transport modes and identifies gaps where additional standardization is potentially required. The gap analysis is focussed on cooperative intelligent transportation systems (C-ITS) for all users, including people with disabilities, as they plan, manage and carry out their “complete trip”, including all connections and transfers, from end-to-end.

The term “light mode conveyances” covers C-ITS for light power and active modes such as micromobility vehicles (e.g. e-scooters), power or power-assisted vehicles (e.g. e-bikes, power wheelchairs), and full powered vehicles (e.g. motorcycles, mopeds).

This document identifies areas where standardization is potentially required to ~~solve~~resolve problems and challenges, or to create opportunities, particularly with respect to ~~enhanced~~enhancing safety and the provision of end-to-end multimodal journeys and support.

2 Normative references

There are no normative references in this document.

3 Terms and definitions and abbreviated terms

~~3.1.1.1.1.1.1~~ Definitions <https://standards.iteh.ai/catalog/standards/sist/235cb33a-7790-419a-461b11ad3958/iso-prf-tr-24317>

3.1 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

4.3.2 Abbreviated terms

AI	artificial intelligence
<u>BSM</u>	<u>basic safety message</u>
CCAM	cooperative, connected and automated mobility
CV	connected vehicles
DSRC	dedicated short-range communication
HMI	human machine interface
ITS	intelligent transport system
ITS-S	intelligent transport system —station

Formatted: Font: Bold

Formatted: Left: 1.9 cm, Right: 1.9 cm, Bottom: 1 cm, Gutter: 0 cm, Section start: New page, Width: 21 cm, Height: 29.7 cm, Header distance from edge: 1.27 cm, Footer distance from edge: 0.5 cm

Formatted: Main Title 1, Space After: 0 pt

Formatted: Font: Bold

Formatted: Font: Not Italic

Formatted: Body Text

Formatted: Body Text

Formatted: Heading 5

Formatted: Body Text

Formatted: Heading 2

Formatted Table

Formatted: Table body (+)

Formatted Table

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: Not Bold

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

MaaS	mobility as a service
ML	machine learning
MMV	micromobility vehicle
MU	mobile unit
P2P	pedestrian to pedestrian
P2WV	powered two-wheel vehicle
P-ITS-S	personal ITS intelligent transport system station
RoW	right of way
UTMS	universal traffic management systems
V2V	vehicle to vehicle
V2I	vehicle to infrastructure
V2P	vehicle to pedestrian
V2x	vehicle to everything
V2x	vehicle to everything
VAM	VRV vulnerable road vehicle awareness message
V-ITS-S	vehicle ITS Station intelligent transport system station
VRU	vulnerable road user
VRV	vulnerable road vehicle

Formatted: Font: Bold

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted Table

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

Formatted Table

Formatted: Table body (+)

Formatted: Table body (+)

Formatted: Table body (+)

5 VRU

ISO/PRF TR 24317

4 VRU Vulnerable road users (VRUs)

5.14.1 VRUs in standardization

This clause describes the current provisions and differences among regions and standardization organizations when defining VRUs, the eco-system in which VRUs exist, the devices used for detection, control and communication, information exchanged with other actors, and the haptic sensory approaches used for notification.

Formatted: Body Text

5.2.4.2 VRU VRUs in the ~~Context~~ context of C-ITS

5.2.4.2.1 Overview

C-ITS and connected vehicle (CV) ~~programs~~ **programmes** typically characterize communications between vehicles (V2V), between vehicles and infrastructure (V2I) and between vehicles and pedestrians (V2P). "Pedestrians" in this context typically refers to VRUs including people walking, passengers embarking and disembarking buses and trains, animals, people in work zones, people riding bicycles and people riding low-powered mobility devices such as e-scooters, powered wheelchairs, and power assisted bikes.

Formatted: Body Text

5.2.4.2.2 C-ITS safety processes

Standards for VRUs are derived from the needs associated with their travel safety requirements. Typical C-ITS activities follow a process flow as shown in ~~Figure 1~~ **Figure 1**. The flow begins when a vehicle, pedestrian or infrastructure detects the presence of a threat (1. Detection). -Once detected, the system identifies the type of threat (2. Identification).- In some cases, the path taken by the "threat" can be

Formatted: Body Text

Formatted: Font: Not Bold

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: Bold

assumed by way of path restrictions (3. Compliance with right of way). -Examples of right of way restrictions include a railroad grade crossing with gates drawn, a bicycle blocking a walkway, or pedestrians crossing against a traffic signal. -For any actor to take evasive action or be notified of the threat, the threat's expected manoeuvre needs to be determined (4. Expected Manoeuvre-manoeuvre). Finally, the appropriate action can be taken to inform or alert the actor of the threat (5-Communicate). These processes apply to V2V, V2I and V2P processes, albeit via different ITS-Station_S devices and applications.

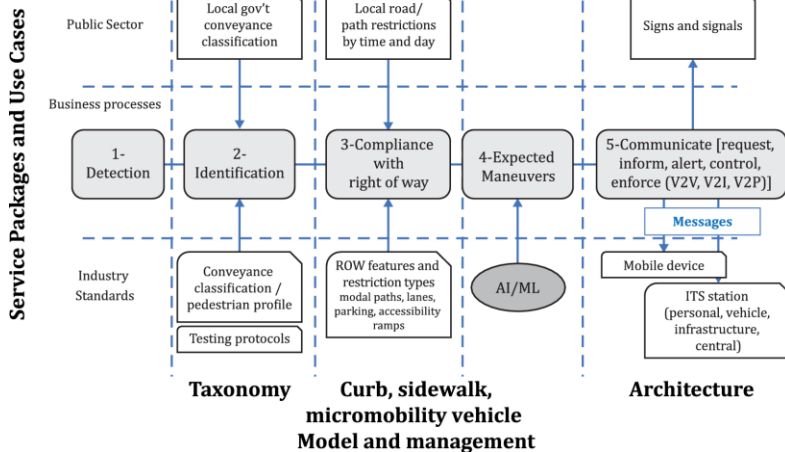
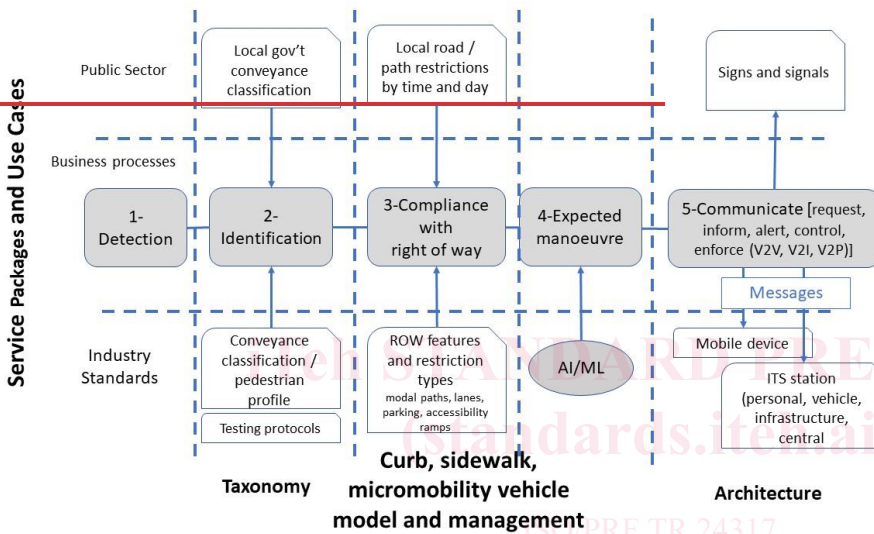


Figure 1 — Figure 1 — General processes related to VRU detection and communications in the context of V2x, V2P and P2P

- Formatted: Figure title
- Formatted: Font: 11 pt
- Formatted: Font: 11 pt
- Formatted: Font: 11 pt
- Formatted: Font: Not Bold
- Formatted: Font: 11 pt
- Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: Bold

1) ~~1)~~ **Detection** — This process requires technologies to identify objects that are nearby. There are many such detection methods currently in use, including passive sensors that detect the presence of VRUs (e.g., lidar, ~~Bluetooth~~~~wireless~~, and acoustic) or active communications between ITS-S devices (V2x or more appropriately VRU-2-x).

Formatted: Font: Not Bold

Formatted: List Number 1, Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0 cm + Indent at: 0 cm

2) ~~2)~~ **Identification** — This process requires understanding the characteristics of the “threats”. In this case, the process focuses on identifying the type of VRU. To aid in subsequent processes, such as determining compliance with rules and expected behaviours, the VRU characteristics are required to assess compliance and predict behaviour. ~~these~~. ~~These~~ parameters include understanding maximum speed, dimensions, behavioural profile, restrictions and more. A VRU type and model will provide the appropriate information to feed these subsequent processes. ~~See 5.1~~~~See 5.1~~ for existing definitions and taxonomies that detail classification models for VRUs.

Formatted: Font: Not Bold

3) ~~3)~~ **Compliance with right of way (RoW)** — This process involves determining compliance with RoW restrictions. In some cases, this rule is targeted to the VRU, for example, no walk signals for people with a visual impairment. Compliance with RoW requires vehicles and VRUs to follow transport rules. ~~For example, the infrastructure can detect a cyclist~~ ~~traveling~~~~travelling~~ on a restricted highway, an e-scooter parked in a pedestrian path impacting a person with visual disability, or a vehicle making a right turn onto a restricted road.

Formatted: Font: Not Bold

Formatted: Font: Not Bold

4) ~~4)~~ **Expected manoeuvres** — This process describes algorithms and models of VRU behaviour. These models provide scenarios ~~which demonstrate~~, for example, the different expectations of intersection crossing by an adult walking with a young child versus a runner. Specific standards in this area are too new to determine. ~~Research in “near miss collisions” particularly between VRUs (e.g., bikes/e-scooters and pedestrians) as well as predicting VRU behaviour (in groups as well as by individuals) using predictive analytics, machine learning and other artificial intelligence techniques will help identify information needed to support the emerging tools.~~

Formatted: Font: Not Bold

5) ~~5)~~ **Communicate** — This process describes the processes for alerting the ITS-S application associated with the appropriate threatened actor. For the VRU for example, this alert can be received and delivered by infrastructure (flashing sign), VRU vehicle (bicycle, scooter, motorcycle), or by a personal nomadic device.

Formatted: Font: Not Bold

Research, technologies, and use case descriptions generally fall into these five categories. ETSI use cases describe additional complexities that augment our understanding (see ~~references [1], [2] and [3]~~). ~~References [1], [2] and [3]~~.

Formatted: Body Text

5.2.3.4.2.3 C-ITS view of VRU

Many standards related to VRUs deal with ~~vehicle~~~~vehicles~~ or infrastructure sensing and avoiding the VRU. However, with new research, ~~and~~ reduced costs of awareness sensors, an increasing number of VRUs are likely to possess personal devices with ITS-S applications. This document focuses on identifying the needs of the VRU including ~~on integrating them~~~~their integration~~ into the C-ITS environment as an active rather than a passive participant.

Formatted: Body Text

At an early stage in the US Department of ~~Transportation~~~~Transportation's~~ “Vehicle to Pedestrian” program, the focus was on detection and communication. Three “technology categories” ~~were used that included pedestrians (i.e., VRUs) as an active participant in the C-ITS environment. These included the following categories:~~

Formatted: Font: Not Italic

Formatted: List Number 1, Indent: Left: 0 cm, First line: 0 cm, Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0 cm + Indent at: 0 cm

•1) ~~Unilateral Pedestrian Detection~~~~pedestrian detection~~ and ~~Driver Notification~~~~driver notification~~: Technologies that provide collision alerts only to the driver.

Formatted: Font: Not Bold

•2) ~~Unilateral Vehicle Detection~~~~vehicle detection~~ and ~~Pedestrian Notification~~~~pedestrian notification~~: Technologies that provide collision alerts only to the pedestrian ~~{(i.e., VRUs)}~~.

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: Bold

- 3) ~~Bilateral Detection~~**detection** and ~~Notification Systems~~**notification systems**: Technologies that provide collision alerts to both drivers and pedestrians ~~{[VRUs]}~~ in parallel.

Formatted: Body Text

Research in this area is listed in a related technology scan sponsored by the US Department of Transportation. The categories are in fact much more complex than the three listed above. For example, the ~~Unilateral Vehicle Detection~~**unilateral vehicle detection** and ~~Pedestrian Notification~~**pedestrian notification** category can include:

Formatted: List Number 1, Indent: Left: 0 cm, First line: 0 cm, Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0 cm + Indent at: 0 cm

- a) ~~Personal~~**a personal** device detecting and notifying ~~the~~ VRU of collision;
- b) ~~Infrastructure~~**infrastructure** detecting and notifying ~~the~~ VRU of collision (through audible or visual warnings);
- c) ~~Infrastructure~~**infrastructure** detecting and notifying ~~VRU~~**the VRU's** personal device of collision.

Formatted: Body Text

~~Standards~~**Existing standards have** only addressed a limited subset of the needs identified. ~~Further~~**Furthermore**, existing architectures (role-based and physical) ~~did~~**have** not fully ~~embrace~~**embraced** the categories or the complexities. In particular, the physical components, technologies and information flows vary for each of the three scenarios. ~~To that end, the architecture needs to be technology and physical component agnostic. Even a VRU changes their role depending on travelling~~**travelling** mode, and with them, the role of their personal ITS-S.

5.3.4.3 Definitions and Taxonomy

5.3.4.3.1 Overview

Formatted: Body Text

The processes to detect and identify the VRU (starts with understanding the type of VRU, and then ~~determines~~**determining** the behaviour of that VRU. Identification is determined by a clear set of logical categories that describe critical characteristics of the observed VRU. ~~This~~ **clause** ~~subclause~~ describes various sets of taxonomies that relate to a VRU. ~~These~~ contribute to generating a comprehensive VRU ~~Profile~~**profile** that supports downstream processes. ~~The~~ areas include:

Formatted: List Continue 1, No bullets or numbering

- ~~Definition~~**definition** and taxonomy for VRU (Clause 5.2.1)(5.2.1);
- ~~Classification~~**classification** for VRU vehicles (VRV) and devices (Clause 5.2.2)(5.2.2);
- ~~Combining~~**combining** VRU person and device/vehicle (Clause 5.2.3)(5.2.3).

5.3.4.3.2 Definition of VRU

5.3.2.14.3.2.1 General

Formatted: Body Text

There is no consensus on terminology, classifications or scope in terms of a VRU; ~~the~~ **The** only profiles of VRU found in automotive standards are for pedestrian and bicycle.^{[21],[16],[21],[16]}

However, ~~certain additional definitions are listed in the sources covered in the following~~ **documents include definitions:** ~~subclauses.~~

4.3.2.2 SAE DSRC — VRU definitions from

SAE J2945-9:2017 (~~SAE DSRC~~) [19]

— Non-motorized and L-Class Vehicle Classification from European Union (EU) [17]

— ETSI TR 103 300 series on VRU Awareness (ETSI) [1, 2, 3]

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: Not Bold

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single