



FINAL DRAFT International Standard

ISO/FDIS 16610-45

Geometrical product specifications (GPS) — Filtration —

Part 45:

Morphological profile filters: Segmentation

Spécification géométrique des produits (GPS) — Filtrage —

Partie 45: Filtres de profil morphologiques : Segmentation

[ISO/FDIS 16610-45](https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45)

<https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45>

ISO/TC 213

Secretariat: **BSI**

Voting begins on:
2024-08-05

Voting terminates on:
2024-09-30

ISO/CEN PARALLEL PROCESSING

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/FDIS 16610-45](https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45)

<https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 Terms related to geometrical features.....	1
3.2 Terms related to segmentation.....	3
3.3 Terms related to pruning.....	5
3.4 Terms related to the motif method.....	8
4 Segmentation details	10
4.1 General.....	10
4.2 Basic segmentation.....	10
4.3 Watershed segmentation using Wolf pruning.....	10
4.3.1 General.....	10
4.3.2 Calculation method for watershed segmentation using Wolf pruning.....	10
4.4 Crossing-the-line segmentation.....	11
4.4.1 General.....	11
4.4.2 Calculation method for crossing-the-line segmentation.....	11
5 General information	14
Annex A (informative) Crossing-the-line segmentation to determine profile elements	15
Annex B (informative) Other segmentation information — Hyperreal numbers	21
Annex C (informative) Relationship to the filtration matrix model	23
Annex D (informative) Concept diagrams	24
Annex E (informative) Relationship to the GPS matrix model	28
Bibliography	29

[ISO/FDIS 16610-45](https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45)

<https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 213, *Dimensional and geometrical product specifications and verification*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 290, *Dimensional and geometrical product specification and verification*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 16610 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO 14638). It influences chain links C and E in the GPS matrix structure.

The ISO GPS matrix model given in ISO 14638 gives an overview of the ISO GPS system of which this document is a part. The fundamental rules of ISO GPS given in ISO 8015 apply to this document and the default decision rules given in ISO 14253-1 apply to specifications made in accordance with this document, unless otherwise indicated.

For more information on the relationship of this document to filtration matrix model, see [Annex C](#).

For more detailed information on the relationship of this document to other standards and the GPS matrix model, see [Annex E](#).

This document develops the terminology and concepts for profile segmentation.

This document will replace ISO 21920-1 as the source document for profile segmentation. ISO 21920-1 is under revision and its definitions will be aligned with this document.

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO/FDIS 16610-45](#)

<https://standards.iteh.ai/catalog/standards/iso/b43f24d0-4510-4959-8829-f57eb3f2f38d/iso-fdis-16610-45>

Geometrical product specifications (GPS) — Filtration —

Part 45:

Morphological profile filters: Segmentation

1 Scope

This document defines the terminology and develops concepts for profile morphological segmentation. In particular it specifies the watershed segmentation method, the Wolf pruning method and the crossing-the-line method. This document assumes a continuous surface.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 16610-1, *Geometrical product specifications (GPS) — Filtration — Part 1: Overview and basic concepts*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16610-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/iso-fdis-16610-45>

3.1 Terms related to geometrical features

3.1.1

topographic feature

line or point feature on a profile

3.1.1.1

line feature

hill or dale

3.1.1.2

point feature

peak or pit

3.1.2

peak

<watershed segmentation> point on the profile which is higher than all other points within the neighbourhood of that point

Note 1 to entry: There is a theoretical possibility of a plateau. In this case, the peak is the middle single point on the plateau. Alternatively, techniques given in [Annex B](#) can be used.

3.1.3

peak

<reference line> highest point of a *hill* (3.1.7)

Note 1 to entry: There is a theoretical possibility of a plateau. In this case, the peak is the middle single point on the plateau. Alternatively, techniques given in Annex B can be used.

3.1.4

pit

<watershed segmentation> point on the profile which is lower than all other points within the neighbourhood of that point

Note 1 to entry: There is a theoretical possibility of a plateau. In this case, the pit is the middle single point on the plateau. Alternatively, techniques given in Annex B can be used.

3.1.5

pit

<reference line> lowest point of a *dale* (3.1.9)


Note 1 to entry: There is a theoretical possibility of a plateau. In this case, the peak is the middle single point on the plateau. Alternatively, techniques given in Annex B can be used.

3.1.6

hill

<watershed segmentation> region around a peak such that all maximal upward paths end at the peak

Note 1 to entry: See Figure 1.

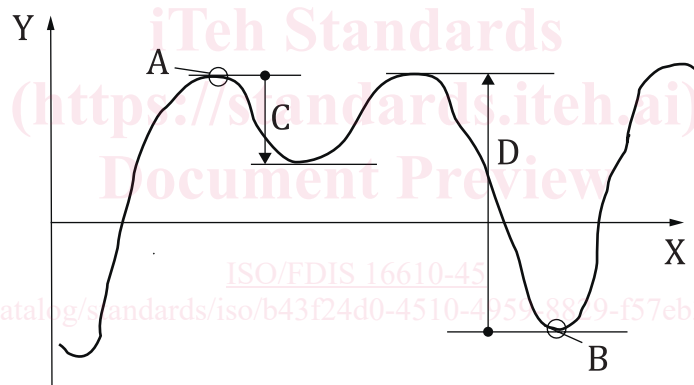

Key

- X X-axis (reference line)
- Y height
- A peak
- B pit
- C hill local height
- D dale local depth


Figure 1 — Hill local height and dale local depth (watershed segmentation)

3.1.7

hill

<reference line> outwardly directed (from material to surrounding medium) contiguous portion of the profile above the reference line bounded by the two adjacent points where the ordinate values change their sign

Note 1 to entry: See Figure 2.

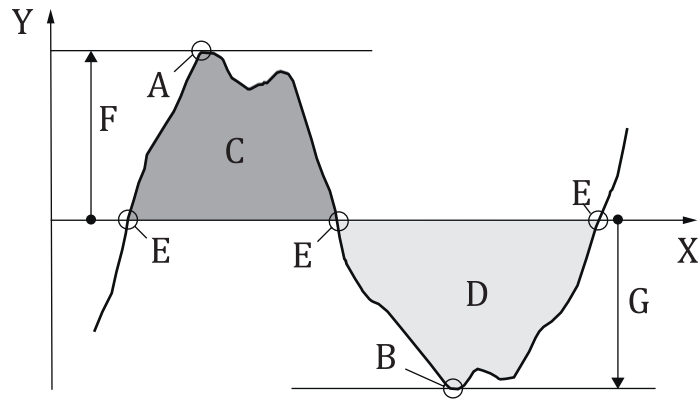

Key

X	X-axis (reference line)	D	dale
Y	height	E	change of sign of the ordinate values
A	peak	F	peak height
B	pit	G	pit depth
C	hill		

Figure 2 — Peak height and pit depth (reference line)

3.1.8

dale

<watershed segmentation> region around a pit such that all maximal downward paths end at the pit

Note 1 to entry: See [Figure 1](#).

3.1.9

dale

<reference line> inwardly directed (from surrounding medium to material) contiguous portion of the scale-limited profile below the reference line bounded by the two adjacent points where the ordinate values change their sign

Note 1 to entry: See [Figure 2](#).

3.2 Terms related to segmentation

3.2.1

segmentation

<profile> method which partitions a profile into distinct topographic features

Note 1 to entry: In this document, there are two types of segmentation:

- a) watershed segmentation (see [4.3](#));
- b) crossing-the line segmentation (see [4.4](#)).

3.2.1.1

watershed segmentation

filtration operation that spatially decomposes a profile into mutually exclusive portions of that profile

3.2.1.2

crossing-the-line segmentation

operation based on crossings of the reference line by a profile in conjunction with a combination algorithm, to leave a set of significant segments

Note 1 to entry: The crossing-the-line segmentation requires *height discrimination* (see [3.3.6.2](#)).

**3.2.1.3
event**

<profile> mutually exclusive profile portions whose union covers the profileEXAMPLE Ordinate values, motifs.

**3.2.2
segmentation function**

<profile> function which splits a set of events into two distinct sets, called the “significant events” and the “insignificant events”, and which satisfies the three segmentation properties


Note 1 to entry: A full mathematical description of the segmentation function and the three segmentation properties can be found in Reference [8].

**3.2.3
first segmentation property**

<profile> property where each event is allocated to the set of significant events or the set of insignificant events but not both

Note 1 to entry: This property can also be given as a mathematical equation as follows:

$$P1 \quad \forall A \subseteq E, \quad \Psi(A) \cup \Phi(A) = A \text{ and } \Psi(A) \cap \Phi(A) = \emptyset$$

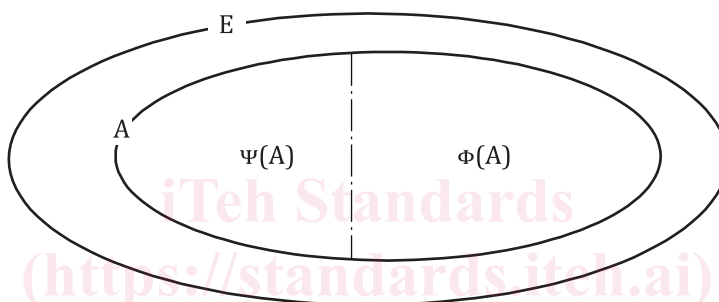

where

E is the set of all events;

A is a subset of E ;

$\Psi(\cdot)$ maps events onto the set of significant events;

$\Phi(\cdot)$ maps events onto the set of insignificant events (see Figure 3).

Figure 3 — Venn diagram of first segmentation property


Note 2 to entry: (.), and throughout this document, the dot is a placeholder for any set of events.

**3.2.4
second segmentation property**

<profile> property where a significant event is removed from the set of events, then the remaining significant events are contained in the new set of significant events

Note 1 to entry: This property can also be given as a mathematical equation as follows:

$$P2 \quad \forall A \subseteq B \subseteq E, \quad \Phi(A) \subseteq \Phi(B)$$

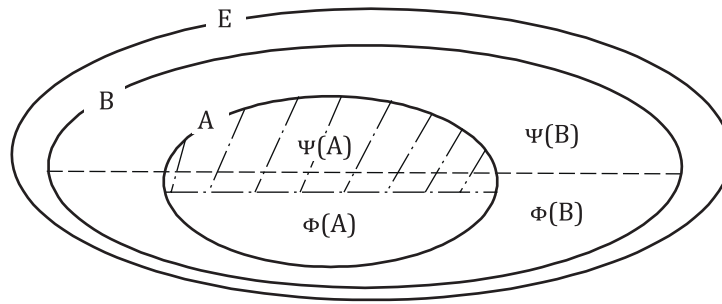

where

E is the set of all events;

A and B are subsets of E ;

$\Phi(\cdot)$ maps events onto the set of insignificant events (see [Figure 4](#)).

NOTE The shaded areas are the significant events for subset A .

Figure 4 — Venn diagram of second segmentation property


3.2.5

third segmentation property

<profile> property where an insignificant event is removed from the set of events, then the same set of significant events is obtained

Note 1 to entry: This property can also be given as a mathematical equation as follows:

$$P3 \quad \forall A \subseteq B \subseteq E, \quad \Psi(B) \subseteq A \Rightarrow \Psi(A) = \Psi(B)$$

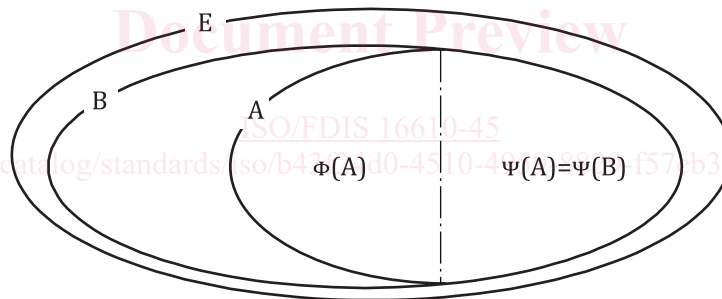

where

E is the set of all events;

A and B are subsets of E ;

$\Psi(\cdot)$ maps events onto the set of insignificant events (see [Figure 5](#)).

Figure 5 — Venn diagram of third segmentation property

3.3 Terms related to pruning

3.3.1

hill change tree

graph which describes the relationships between peaks and pits sorted by their hill local heights

Note 1 to entry: Peaks are represented on a hill change tree by the ends of lines. Pits are represented on a hill change tree by joining lines.

Note 2 to entry: See [Figure 6](#).