

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
22476-16

ISO/TC 182

Secretariat: BSI

Voting begins on:
2023-10-06

Voting terminates on:
2023-12-01

Geotechnical investigation and testing — Field testing —

Part 16: Borehole shear test

Reconnaissance et essais géotechniques — Essais en place —

Partie 16: Essai de cisaillement en forage

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/FDIS 22476-16](https://standards.iteh.ai/catalog/standards/sist/28a2c8b6-9358-456b-a622-1ee459c813fa/iso-fdis-22476-16)

<https://standards.iteh.ai/catalog/standards/sist/28a2c8b6-9358-456b-a622-1ee459c813fa/iso-fdis-22476-16>

ISO/CEN PARALLEL PROCESSING

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 22476-16:2023(E)

© ISO 2023

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 22476-16

<https://standards.iteh.ai/catalog/standards/sist/28a2c8b6-9358-456b-a622-1ee459c813fa/iso-fdis-22476-16>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

| | |
|--|-----------|
| Foreword | v |
| Introduction | vi |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms, definitions, symbols and abbreviated terms | 2 |
| 3.1 Terms and definitions..... | 2 |
| 3.2 Symbols and abbreviated terms..... | 3 |
| 4 Equipment | 4 |
| 4.1 General..... | 4 |
| 4.2 Phicometer probe..... | 6 |
| 4.3 Connection tube line and pulling rods..... | 6 |
| 4.3.1 Connection tube line..... | 6 |
| 4.3.2 Pulling rods..... | 6 |
| 4.4 Equipment at ground surface..... | 8 |
| 4.4.1 Pulling device..... | 8 |
| 4.4.2 Pressure-volume control unit (CU)..... | 8 |
| 4.4.3 Regulation system of the traction speed of the probe..... | 8 |
| 4.5 Means of measurement and control..... | 8 |
| 4.5.1 Time..... | 8 |
| 4.5.2 Pressure, volume and pulling force..... | 9 |
| 4.5.3 Axial displacement..... | 9 |
| 4.5.4 Display of readings..... | 9 |
| 4.5.5 Dimensions of the shearing zone of the probe..... | 9 |
| 5 Test procedure | 9 |
| 5.1 Checks and measurements before insertion of the probe in the ground..... | 9 |
| 5.2 Borehole drilling phase, probe placing phase and zero setting..... | 9 |
| 5.3 Minimum spacing between tests..... | 10 |
| 5.4 Teeth insertion phase..... | 12 |
| 5.5 Shearing phase..... | 14 |
| 5.5.1 Loading program – applied hold pressures in the probe..... | 14 |
| 5.5.2 Successive shearing stages under pressure holds..... | 14 |
| 5.5.3 End of the test..... | 15 |
| 6 Back-filling of the phicometer borehole | 16 |
| 7 Safety requirements | 16 |
| 8 Test results | 16 |
| 8.1 General..... | 16 |
| 8.2 Shearing curve graph – shear strength parameters φ_i and c_i | 16 |
| 8.3 Associated graphs..... | 17 |
| 8.4 Adjustment and determination of the in situ phicometer angle of friction φ_i and the in situ phicometer cohesion c_i | 17 |
| 8.5 Examples of adjustment and determination of the in situ angle of friction φ_i and cohesion c_i | 17 |
| 9 Reporting | 19 |
| 9.1 General..... | 19 |
| 9.2 Field report..... | 19 |
| 9.3 Test report..... | 21 |
| 9.4 Tests log..... | 22 |
| Annex A (normative) Characteristics of the phicometer probe | 23 |
| Annex B (normative) Calibration, checks and corrections | 24 |

| | |
|--|-----------|
| Annex C (normative) Execution of the PBST borehole | 29 |
| Annex D (normative) Determination of the shear strength parameters | 31 |
| Annex E (informative) Correlations to estimate p_{IM} from other soil resistance parameters q_c and N | 33 |
| Annex F (normative) Accuracy and uncertainties | 34 |
| Annex G (informative) Examples of adjustment and determination of the in situ phicometer angle of friction φ_i and cohesion c_i | 36 |
| Annex H (informative) Example of installation of the PBST equipment | 41 |
| Bibliography | 42 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 22476-16

<https://standards.iteh.ai/catalog/standards/sist/28a2c8b6-9358-456b-a622-1ee459c813fa/iso-fdis-22476-16>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 182, *Geotechnics*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 341, *Geotechnical Investigation and Testing*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 22476 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The determination of the shear strength of soils is of paramount importance in geotechnical investigation and testing of soils. The shear resistance of soils and materials, characterised by the friction angle φ and the cohesion c , represents an important parameter for the geotechnical engineer while studying the stability of construction works and structures in relation with soils and materials. Usually, this resistance is measured in the laboratory using triaxial tests or direct shear tests carried out on field samples and only if sampling, conservation and preparation make it possible to consider the samples as non remolded and sufficiently representative of the soil in place.

Since the 1960's, various experimental devices have been designed and developed to determine the shear strength directly in situ from tests carried out in boreholes, in different soils at different depths.

The study of the bibliography literature shows that the majority of the existing borehole shear tests are based on the use of probes for applying and maintaining a normal pressure on the walls of the borehole and then to carry out a shear phase by a linear displacement of the probe on the soil against the walls of the borehole. The procedure is then repeated through a multistage increase of the normal pressure to obtain more values relating normal pressure and shear resistance.

The test equipment and apparatuses differ from each other by the geometry and size of the probes and by the shape of the friction part of these probes and by the procedure for applying normal pressure stages and shear phases.

One of the first devices of this kind is the Iowa Borehole Shear Tester (BST) developed in the USA. [13] The test is performed by placing a bilateral expandable probe, equipped with two diametrically opposed shear plates in a predrilled borehole, expanding the probe against the wall of the borehole and causing a shear failure in the soil by pulling the probe axially along the borehole. The size of the shear plates is relatively small (32,3 cm²) and does not allow testing of soils with coarse elements, which can somewhat limit its field of application.

In the early 1970s, H. Mori, [15] in Japan, developed an in situ shearing device called the IST which was used in many projects. The principle of the test is carried out by generating a shearing force while pulling upwards a cylindrical expandable probe provided with teeth driven into the wall of the borehole but it is not reported whether the IST test continues to be performed currently.


A self-boring in situ friction test (SBIFT), also developed in Japan, [14] allows the evaluation of soil characteristics as the initial horizontal at rest pressure, and deformation modulus and strength characteristics (cohesion and internal friction angle) of the soil. The SBIFT possesses a self-boring drilling functionality that can reduce the disturbance of the tested soil. However, very few data and results are available to currently validate this device and the characteristics of the soil it provides.

The same way as the SBIFT, a self-boring in situ shear pressuremeter (SBISP), was recently developed in China, [12] that allows the evaluation of pressuremetric characteristics as the initial horizontal at rest pressure, deformation yield pressure and modulus and also strength characteristics (cohesion and internal friction angle) of the soil. The SBISP possesses a self-boring drilling functionality that can greatly reduce the disturbance of the tested soil. However, very few data and results are available to currently validate this device and the characteristics of the soil it provides.

This document applies to the borehole shear test using the phicometer procedure, commonly named the phicometer borehole shear test (PBST). This test has been invented and developed by Gérard Philipponnat in the 1980's. [10]

This test has been the subject, between 1986 and 1992, of several applied research programs to design the apparatus and its components and to develop and optimize a common test procedure that can be used in a majority of soils. Various articles have been published as a result of these researches and since then PBST tests continue to be carried out currently, for the determination of the shear strength parameters from the test and to derive values for the undrained shear strength and an estimation of the drained effective shear resistance parameters. [9] The test has been standardized in France since 1997.

The borehole shear test using the picometer covers a four-phases procedure consisting of drilling a borehole, lowering the probe to the test depth, inflating it into the borehole wall and shearing the soil by applying a series of steps of controlled radial pressure and simultaneously pulling out the probe with a constant displacement rate. The test sequences are shown in [Figure 1](#).

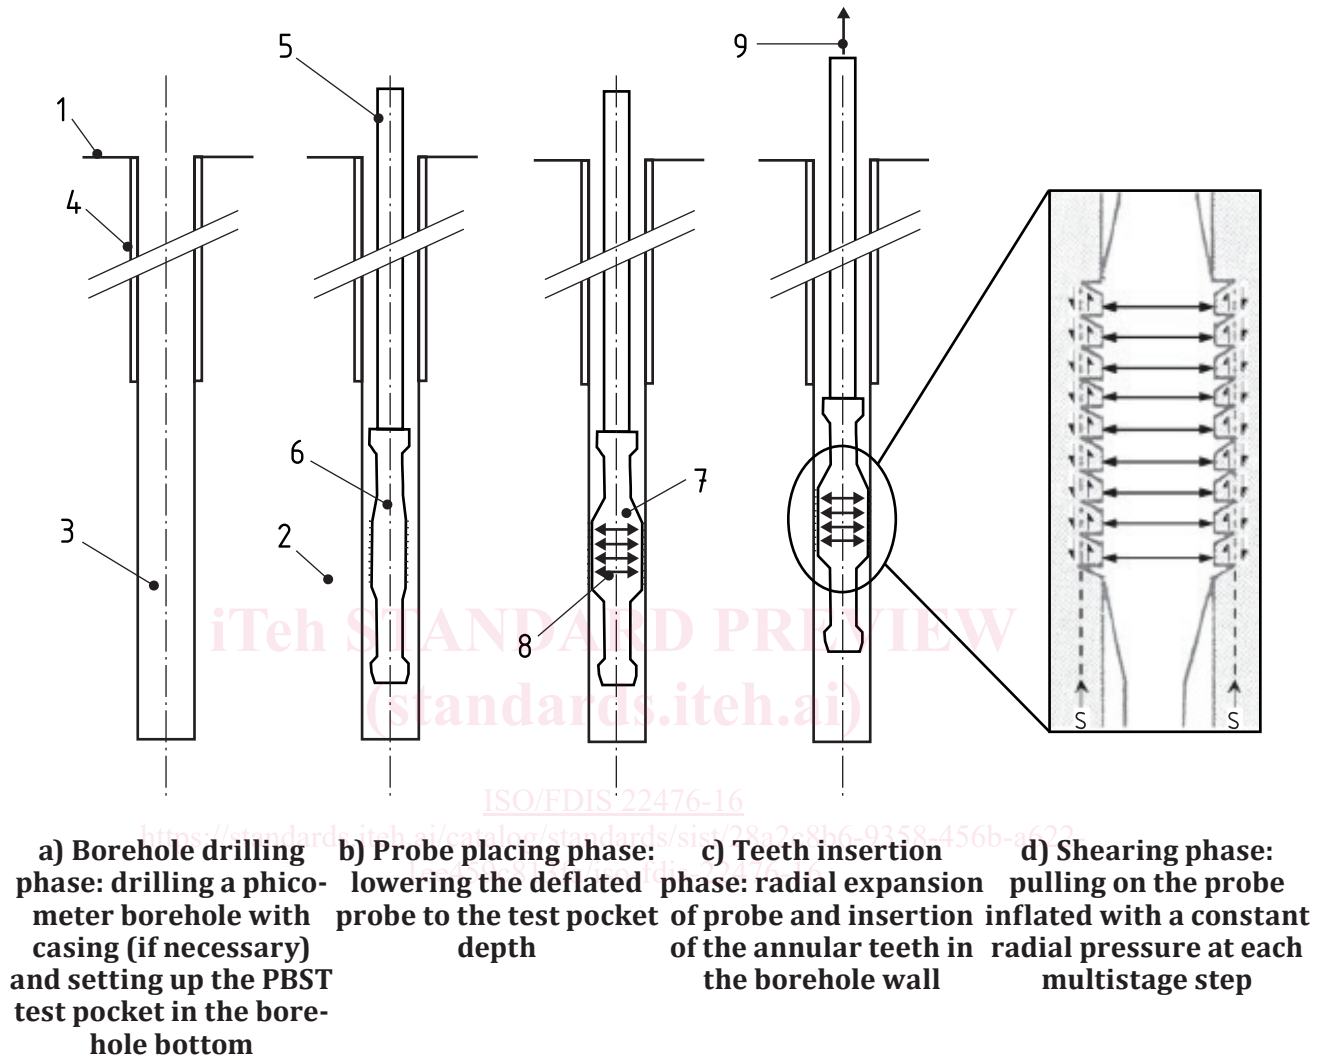

Key

- | | | |
|------------------|--------------------------|-----------------------------|
| 1 ground surface | 4 casing (if necessary) | 7 probe (inflated state) |
| 2 ground | 5 string of rods | 8 radial pressure |
| 3 borehole | 6 probe (deflated state) | 9 pulling force |
| | | S cylindrical shear surface |

Figure 1 — General arrangement and phases of the picometer procedure borehole shear test

Geotechnical investigation and testing — Field testing —

Part 16: Borehole shear test

1 Scope

This document is applicable to the borehole shear test using the phicometer procedure, commonly named the phicometer test (etymologically derived from phi for friction angle, co for cohesion and meter for measurement).

The test can be performed in all types of natural soils, fills and artificial soils, which can be saturated or not.

It does not apply to very soft fine soils, very loose coarse soils, medium strong to very strong rocks and natural or artificial soils with a predominance of cobbles having a particle diameter greater than 150 mm.

Generally, the test is applicable in soils with an order of magnitude of their in situ resistance characteristics as follows:

- Ménard pressuremeter limit pressure: $0,4 \text{ MPa} < p_{IM} < 3,5 \text{ MPa}$ approximately or more than 4 MPa in granular non-cohesive soils;
- CPT Cone resistance: $1,5 \text{ MPa} < q_c < 15 \text{ MPa}$ approximately, depending on the type of soil (see [Annex E](#));
- SPT N: $8 < N < 50$ approximately, depending on the type of soil (see [Annex E](#)).

The test can also be carried out in soils presenting a resistance outside these application limits as long as the representativeness of the results is assessed or validated by the analysis of the PBST graphs (see [Clause 8](#)).

This document applies only to tests carried out at a depth less than or equal to 30 m.

The parameters derived from this test are the shear strength properties, as the cohesion and angle of friction.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10012, *Measurement management systems — Requirements for measurement processes and measuring equipment*

ISO 22475-1, *Geotechnical investigation and testing — Sampling methods and groundwater measurements — Part 1: Technical principles for the sampling of soil, rock and groundwater*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1.1

borehole shear test

process during which a special shearing probe is installed in a borehole at a defined depth and inflated against the borehole wall and pulled to determine the resulting shear resistance of the soil

Note 1 to entry: This process is repeated with a succession of increased maintained normal pressure steps so as to obtain a pressure versus shear stress relation of the soil.

3.1.2

phicometer borehole shear test

PBST

shear test performed in a *phicometer borehole* (3.1.4) with the *phicometer probe* (3.1.6) and the phicometer test procedure

Note 1 to entry: See [Clause 5](#) for the phicometer test procedure.

3.1.3

phicometer

whole equipment which is used to carry out a *phicometer borehole shear test* (3.1.2)

3.1.4

phicometer borehole

part of a borehole in which the *phicometer test pocket* (3.1.5) is to be set up

Note 1 to entry: See [5.2](#).

3.1.5

phicometer test pocket

cylindrical cavity with a circular section made in a borehole and in which the *phicometer probe* (3.1.6) is placed, brought into contact and pulled upwards during the test phases

3.1.6

phicometer probe

cylindrical expandable probe with annular shearing teeth, used to carry out a *phicometer borehole shear test* (3.1.2)

Note 1 to entry: See [4.2](#) and [Figure 3](#).

3.1.7

phicometer test diagram

set of plots resulting from the *PBST* (3.1.2) test and allowing the determination of the shear resistance of the soil

Note 1 to entry: See [Clause 8](#) and [Figure 6](#).

3.1.8

phicometer cohesion

in situ cohesion c_i obtained from the *phicometer test diagram* (3.1.7)

3.1.9**phicometer angle of friction**

in situ angle of shear friction φ_i obtained from the *phicometer test diagram* (3.1.7)

3.1.10**depth of test**

distance between the ground level and the centre of the shearing zone of the phicometer probe measured along the borehole axis

3.1.11**operator**

technician trained in carrying out PBST tests, in accordance with this document

3.2 Symbols and abbreviated terms

For the purposes of this document, the symbols of [Table 1](#) apply.

Table 1 — Symbols

| Symbol | Description | Unit |
|----------|--|-----------------|
| T | Pulling force on the probe | kN |
| T_1 | Maximum pulling force | kN |
| V | Volume injected into the measuring cell of the probe as read on the control unit | cm ³ |
| V_d | Volume injected into the measuring cell of the probe at the beginning of the application of the pulling force ($V_d = V_{60}$) | cm ³ |
| V_f | Volume injected into the measuring cell of the probe at the end of the application of pulling force | cm ³ |
| V_{30} | Volume injected into the measuring cell of the probe after 30 s under a constant pressure phase | cm ³ |
| V_{60} | Volume injected into the measuring cell of the probe after 60 s under a constant pressure phase | cm ³ |
| d_{s0} | Initial diameter of the probe at rest in the shearing zone (see Figure 3) | mm |
| c_i | phicometer cohesion measured in situ by the PBST | kPa |
| d_s | Diameter of the probe in the shearing zone after injection of a volume V (see Figure 3) | mm |
| d_t | Diameter of the pocket at the level of the test | mm |
| d_c | Outside diameter of the measuring cell of the probe | mm |
| l_t | Slots length of the expansible shear tube | mm |
| l_c | Distance between the rings of the measuring cell of the probe | mm |
| l_s | Conventional length of the shearing zone (see Figure 3) | mm |
| N | Standard penetration test SPT Blow count (see ISO 22476-3) | - |
| p_c | Conventional radial pressure applied to the ground after corrections | kPa |
| p_e | Probe stiffness pressure loss determined by calibration | kPa |
| p_h | Pressure due to the injection liquid column in the probe (between z_c and z_s) | kPa |
| p_{1M} | Ménard pressuremeter limit pressure (see ISO 22476-4) | MPa |
| p_r | Pressure of the liquid injected into the phicometer measuring cell, read at the level z_c of the control unit (CU) | kPa |
| p_z | Pressure of the liquid at the centre of the measuring cell | kPa |
| q_c | Cone penetration resistance (see ISO 22476-1 or ISO 22476-12) | MPa |
| t | Time | s |

Table 1 (continued)

| Symbol | Description | Unit |
|--------------|--|-------------------|
| v | Rate of axial displacement of the probe during the pulling phase | mm/min |
| z | Elevation, ascending above datum | m |
| z_0 | Elevation of the ground surface level at the location of the test | m |
| z_c | Elevation of the pressure measuring device of the liquid injected into the phicometer measuring cell | m |
| z_e | Elevation of the drilling fluid in the borehole | m |
| z_{ei} | Initial level of water or mud measured in the borehole before the beginning of the test | m |
| z_{ef} | Final level of water or mud measured in the borehole after the end of the test | m |
| z_s | Elevation of the centre of the shearing zone of the phicometer probe at the beginning of the test | m |
| z_w | Elevation of the ground water table (or free water surface in a marine or river environment) | m |
| γ_l | Unit weight of the liquid injected into the measuring cell | kN/m ³ |
| γ_w | Unit weight of water | kN/m ³ |
| Δl | Axial displacement of the probe during shearing | mm |
| Δp | Loading pressure increment | kPa |
| Δt | Duration of a pressure hold at a loading stage | s |
| Δt_p | Duration of a loading pressure hold during the preliminary phase | s |
| ΔV | Injected volume change from 30 s to 60 s after reaching the pressure hold | cm ³ |
| φ_i | Phicometer angle of friction measured in situ with the phicometer borehole shear test | ° |
| τ | Shear stress | kPa |
| τ_l | Conventional limit shear stress | kPa |

4 Equipment

4.1 General


The equipment to carry out phicometer borehole shear tests shall consist of the following components:

- phicometer probe,
- pressure – volume control unit (CU),
- a line to connect the probe to the CU,
- a pulling device placed on a reaction base on the ground surface and linked to the probe with pulling rods,
- a device to control the axial shearing displacement rate,
- means of measurement and display of pressure, volume, pulling force, axial displacement and the external diameter of the shearing zone of the probe.

The equipment can also include a data logger.

A phicometer borehole shear test (PBST) device assembly is shown in [Figure 2](#).

An example of installation of the PBST equipment is shown in [Annex H](#).

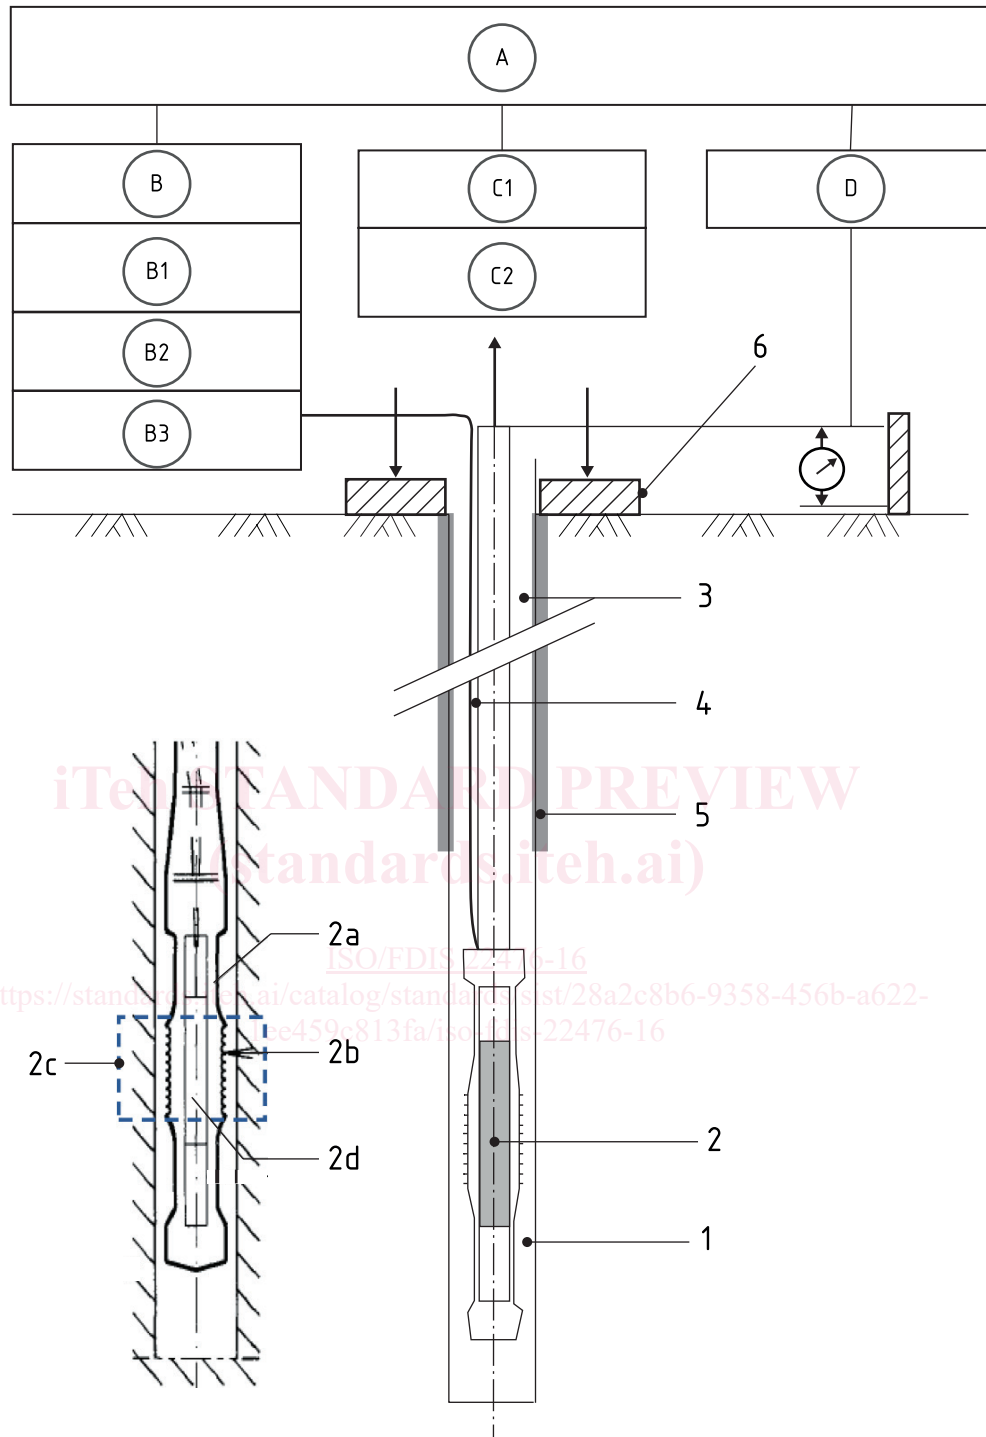

Key

- | | | |
|--|---------------------------------|---|
| 1 borehole | 3 string of rods | 5 borehole casing (if necessary) |
| 2 phicometer probe | 4 connecting line | 6 reaction base |
| | 2a expansible slotted tube | 2c shearing zone mobilized by the probe teeth |
| | 2b annular teeth | 2d inflatable measuring cell |
| A data logger (optional) | B2 volume measurement | C2 pulling device with timer |
| B pressure-volume control unit (CU) | B3 display of readings | D axial displacement control |
| B1 pressure regulator & injection device | C1 measurement of pulling force | |

Figure 2 — Diagram of the PBST test device assembly and its components

4.2 Phicometer probe

The phicometer probe is shown in [Figure 3](#). It consists of a steel slotted device, called “expandable slotted shear tube” in which a radially expandable cylindrical cell called “measuring cell” is placed.

The expandable slotted shear tube is a hollow steel cylinder rigidly connected to the pulling rods to ensure its operation and to transmit the pulling force to the probe from the surface of the ground. It is designed with different parts featuring:

- a central shearing zone, made up of six initially jointed rigid plates, parallel to the axis of the probe and comprising ten annular teeth, regularly spaced vertically;
- two guard zones, made up of metal strips acting as a spring;
- an inflatable measuring cell placed at the level of the central shearing zone inside the expandable slotted shear tube and which is composed of a steel core, a deformable flexible membrane and a tube for liquid injection used to inflate this cell and to measure its volume.

The characteristics of the probe shall be as given in [Annex A](#). Two types of deformable flexible rubber membranes exist:

- a standard membrane;
- a reinforced membrane.

The standard membrane is used for all soil types.

The reinforced membrane is exclusively used for aggressive soils where damaging and bursting of the cell probe occurs frequently.

4.3 Connection tube line and pulling rods

4.3.1 Connection tube line

The flexible tube line connecting the pressure volume control unit to the probe is used to inject the fluid in the measuring cell.

The expansion coefficient of this line shall be lower than 0,1 cm³/MPa per meter of line.


4.3.2 Pulling rods

A string of steel rods connects the probe to the equipment placed on the ground surface. The resistance of this string of rods shall withstand the efforts and stresses generated by the test during all its phases.

The elongation of the drill string shall remain less than 0,05 % of its total length.

The section of the rods and their fittings shall allow free sliding of the drill string in the borehole.

The part of the pulling rods above the ground surface is threaded over all its length, to allow the adjustment of the locking system of the string of rods on the pulling device (see [4.4.1](#)).

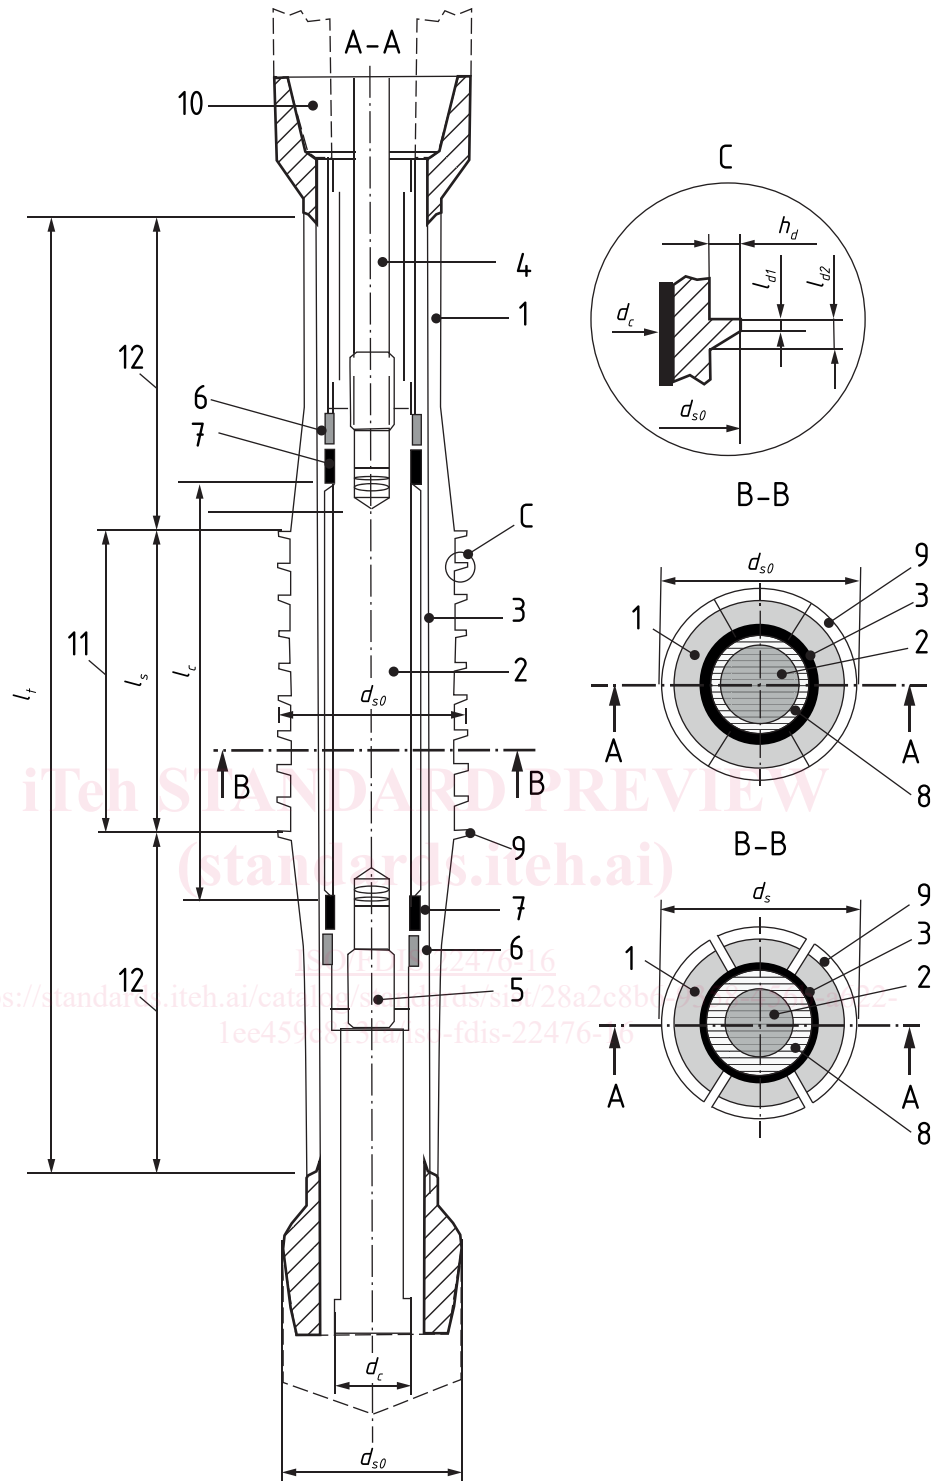

Key

- | | | | | | |
|---|--------------------------------|---|---|---|--------------------------------------|
| 1 | expandable slotted shear tube | 2 | steel core of the inflatable measuring cell, placed between two spacers | 3 | measuring cell membrane |
| 4 | tube line for liquid injection | 5 | purge | 6 | rings for tightening of the membrane |
| 7 | joints | 8 | liquid for inflating the membrane | 9 | annular teeth of the shearing zone |