

---

---

**Road vehicles — Test scenarios  
for automated driving systems —  
Vocabulary**

*Véhicules routiers — Scénarios d'essai pour les systèmes de conduite  
automatisée — Vocabulaire*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 34501:2022

<https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022>



iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 34501:2022

<https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
Bibliography.....	9
Index.....	10

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 34501:2022](https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022)

<https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 33, *Vehicle dynamics and chassis components*.

ISO 34501:2022

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

Automated driving systems (ADS) combine a variety of sensors to perceive their surroundings, such as cameras, radars, lidars, sonars, GNSS receivers, HD maps, odometry and inertial measurement units. ADS advanced control systems interpret sensory information to identify appropriate navigation paths, as well as obstacles and relevant signage and automatically control the vehicle. To make this work, the vehicle is developed by simulation and real-world operation to ensure the driving capacities of the ADS, with the priority being safety. Prior to releasing to the public, the system is tested for many scenarios from varieties of sources, not limited to naturalistic driving situations and known corner cases.

Scenario-based test methods for ADS mainly consist of four aspects: test scenarios, procedures, equipment and criteria with which the performance of ADS can be evaluated. Among these aspects, the development of test scenarios is most fundamental since their integrity and representativeness are crucial for evaluating the performance of ADS. Test scenarios serve as a basis for developing relevant procedures, equipment and criteria. Because of the importance of the test scenarios, the needs for standardizing the language we use to describe scenarios are derived from the demand of government and industry in terms of performing ADS design, testing, evaluation, and management, etc.

A universal norm of vocabularies supports providing basic ideas and clarifying the interrelations and concepts commonly used in scenarios. These vocabularies could be useful to facilitate the mutual-understanding, communication, and development of scenario-based engineering process.

In the context of automated driving, the vocabulary of test scenario is inevitably associated with existing standards like ISO 21448, ISO 26262-1 or other technical documents. However, people may find that some terms being defined in this document might not be identical with those in other documents. That is because, terms in this document are defined and interpreted in the context of test scenarios description with emphasis on their interrelationship to each other, while other standards may focus on safety or other aspects.

[ISO 34501:2022](https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022)

<https://standards.iteh.ai/catalog/standards/sist/cbe2cdbf-7166-44bd-b15f-04b9682de1d0/iso-34501-2022>



# Road vehicles — Test scenarios for automated driving systems — Vocabulary

## 1 Scope

The document defines terms in the context of test scenarios for automated driving systems (ADS).

The document is applicable to ADS of Level 3 and above defined in ISO/SAE PAS 22736.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

### 3.1

#### automated driving system

##### ADS

hardware and software that are collectively capable of performing the entire *dynamic driving task (DDT)* (3.27) on a sustained basis, regardless of whether it is limited to a specific *operational design domain (ODD)* (3.26)

Note 1 to entry: ADS is used specifically to describe a Level 3, 4, or 5 driving automation system.

Note 2 to entry: In contrast to ADS, the generic term “driving automation system” refers to any Level 1 to 5 system or feature that performs part or all of the DDT on a sustained basis. Given the similarity between the generic term, “driving automation system” and the Level 3 to 5 specific term, “automated driving system”, the latter term should be capitalized when spelled out and reduced to its abbreviation, ADS, as much as possible, while the former term should not be.

[SOURCE: ISO/SAE PAS 22736: 2021, 3.2, modified — Note 1 to entry has been added.]

### 3.2

#### system under test

##### SUT

*automated driving system (ADS)* (3.1) that is tested with *test scenarios* (3.5)

### 3.3

#### subject vehicle

ego vehicle

host vehicle

vehicle under observation in the process of testing, evaluation, or demonstration

Note 1 to entry: Subject-vehicle testing can be connected with *automated driving system (ADS)* (3.1) testing. In certain cases, the ADS can be tested via vehicle testing. Under these circumstances, the performance of the vehicle does not differ from the performance of the ADS. This is not applicable to the tests that involve the interaction between the ADS and the user.

**3.4 scenario**

sequence of *scenes* (3.6) usually including the *automated driving system(s)* (ADS) (3.1)/*subject vehicle(s)* (3.3), and its/their interactions in the process of performing the *dynamic driving task* (DDT) (3.27)

Note 1 to entry: The definition is an editorial rework of the definition in ISO 21448. The intended meaning of both definitions is the same.

EXAMPLE In the scenario in Figure 1, there are two *actors* (3.16), actor 1 is the subject vehicle, actor 2 is the pedestrian who is about to cross the street. The purpose of this scenario is to specify the behaviour of the subject vehicle (actor 1) in response to the given *actions* (3.15) of the pedestrian (actor 2). There are two *triggers* (3.14) in this scenario. The initiation of the scenario is indicated by trigger 1, which corresponds to the moment that the pedestrian starts crossing the street. At the same time, the subject vehicle is traveling at a pre-set speed for the test purpose. In this case, the scene of a pedestrian appearing on the street becomes the *situation* (3.17) from the perspective of the subject vehicle. The expected behaviour of the subject vehicle under ADS control is to decelerate to stop until the pedestrian safely finishes crossing the road. The *event* (3.13) of a pedestrian arriving at the opposite roadside could be the trigger 2 for the next series of actions in the scenario. Figure 1 illustrates the relationship between several relevant terms of the scenario.

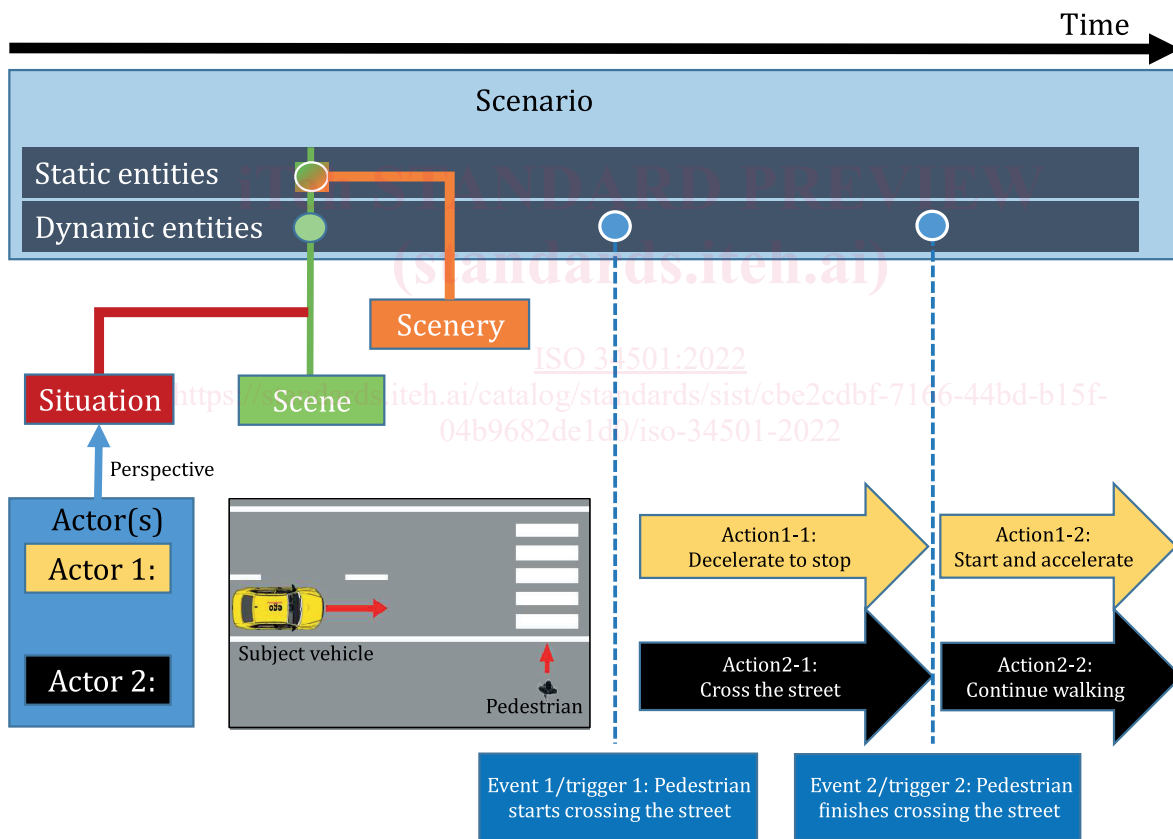


Figure 1 — Example for the relationship of relevant terms of scenario

**3.5 test scenario**

*scenario* (3.4) intended for testing and assessing *automated driving system(s)* (ADS) (3.1)/*subject vehicle(s)* (3.3)

Note 1 to entry: A test scenario may include additional items for the purpose of assessing the ADS performance or behaviour in addition to the scenario content, which include, but are not limited to, sampling *events* (3.13), flagging *system under test(s)* (SUT) (3.2) error check(s), relevant *operational design domain* (ODD) (3.26) data, success criteria, HMI event that may trigger *action(s)* (3.15).




**3.6 scene**

snapshot of all *entities* (3.7) including, but not limited to the *automated driving system (ADS)* (3.1)/ *subject vehicle* (3.3), *scenery* (3.12), *dynamic environment* (3.11), and all *actors* (3.16) and observer's self-representations, and the relationships between those entities

Note 1 to entry: The definition is an editorial rework of the definition in ISO 21448. The intended meaning of both definitions is the same.

Note 2 to entry: A scene is a snapshot of the *scenario* (3.4) which consists of both *static entities* (3.8) and *dynamic entities* (3.9) in a scenario, whereas the scenery only consists of static entities, excluding parts belonging to ADS/subject vehicle.

EXAMPLE [Figure 2](#) is a snapshot of a scenario (as the timeline indicates), at the moment that the subject vehicle is cruising on the road while the pedestrian is about to cross the street.

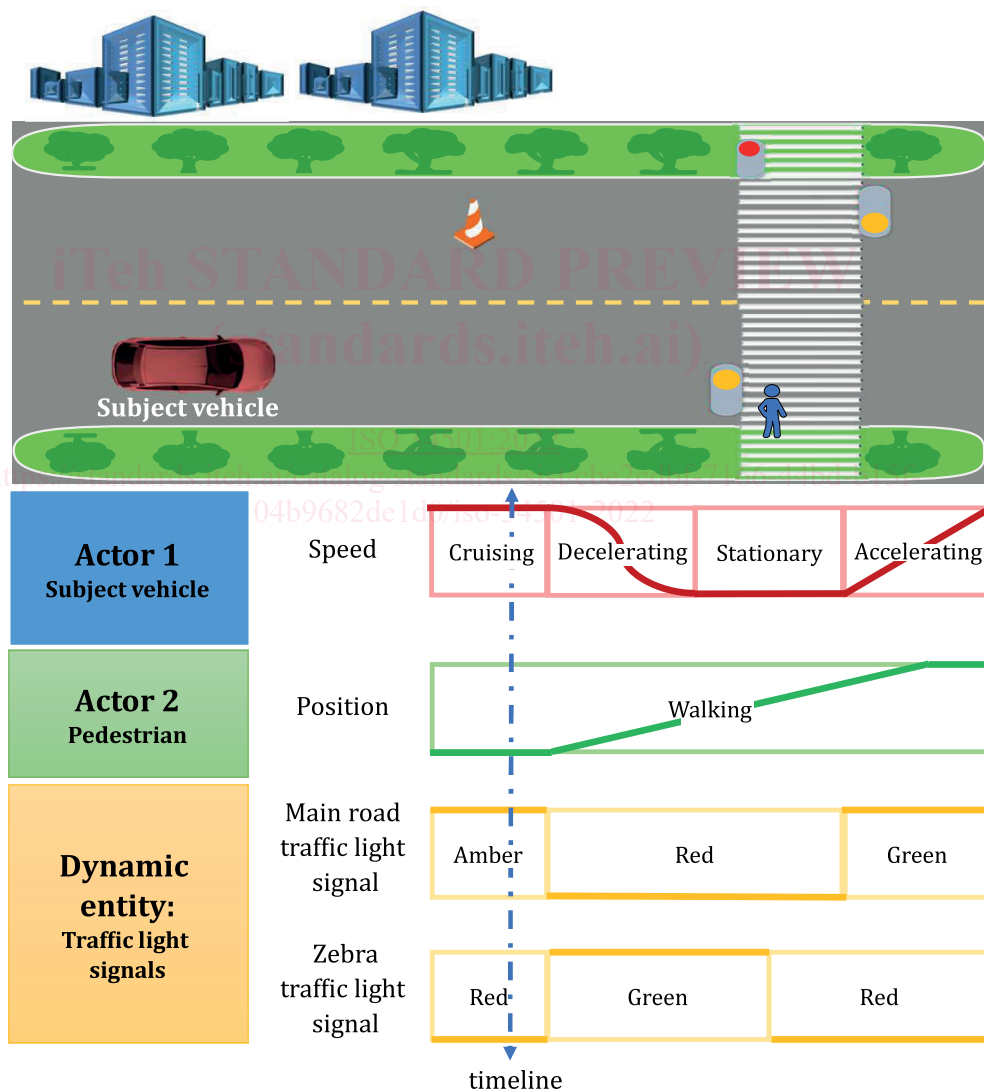

**Figure 2 — Example of a snapshot of a scenario**

**3.7 entity**

element of interest in a *scenario* (3.4)

**3.8 static entity**

entity (3.7) that does not experience state change(s) during a scenario (3.4)

Note 1 to entry: This is an entity belonging to the scenery (3.12).

**3.9 dynamic entity**

entity (3.7) that experiences state change(s) during a scenario (3.4)

Note 1 to entry: The nature of an entity can be different in different scenarios. The same entity can be dynamic in one scenario and maybe static in another one.

EXAMPLE 1 A tree is generally a *static entity* (3.8), but a scenario aiming to test the *automated driving system's* (ADS) (3.1) response to a sudden falling down tree makes it a dynamic entity. The traffic light is a static entity if the light does not change in the scenario, but is a dynamic entity if it changes.

EXAMPLE 2 Figure 3 illustrates dynamic/static entities in a scenario.

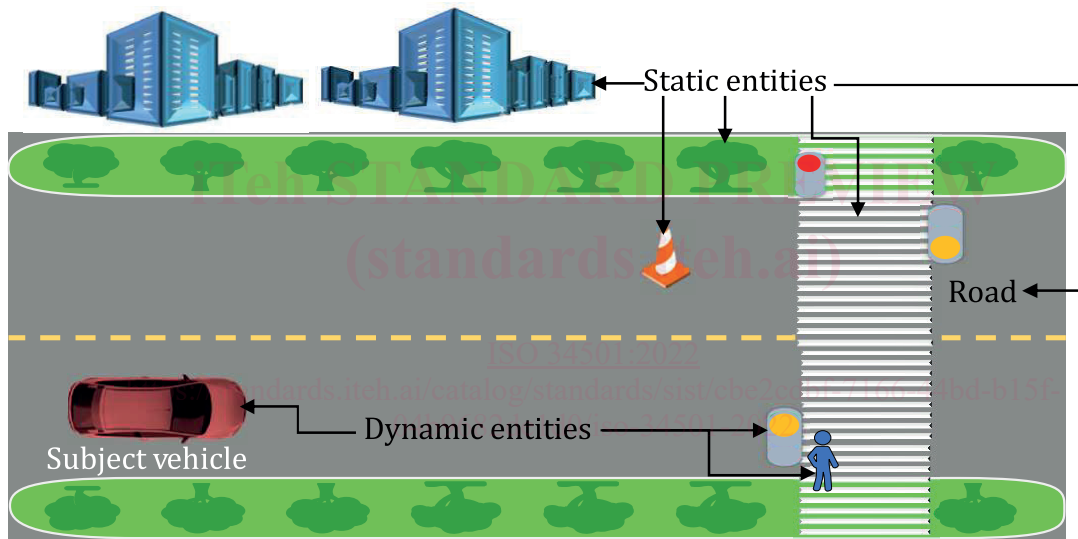


Figure 3 — Dynamic/static entities in a scenario

**3.10 surrounding environment**

all entities (3.7) in a scenario (3.4), excluding the subject vehicle(s) (3.3) or automated driving system(s) (ADS) (3.1)

Note 1 to entry: The surrounding environment should appropriately reflect the subject under observation. When the subject under observation is the ADS, the surrounding environment can incorporate entities in the vehicle.

**3.11 dynamic environment**

entities (3.7) within the surrounding environment (3.10) that experience a state change

**3.12 scenery**

static environment

part of the surrounding environment (3.10) that remains unchanged during a scenario (3.4)

Note 1 to entry: The scenery is equivalent to the set of all relevant static entities (3.8) that are part of the surrounding environment.