
**Road vehicles — Test object
monitoring and control for active
safety and automated/autonomous
vehicle testing — Functional
requirements, specifications and
communication protocol**

iTeh STANDARD PREVIEW
(stable)

*Véhicules routiers — Surveillance et contrôle des objets de test
pour l'évaluation de la sécurité active et des véhicules automatisés/
autonomes — Exigences fonctionnelles, caractéristiques et protocole
de communication*

ISO/TS 22133:2023

<https://standards.iteh.ai/catalog/standards/sist/49560681-8d15-4290-bbab-194621163837/iso-ts-22133-2023>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TS 22133:2023

<https://standards.iteh.ai/catalog/standards/sist/49560681-8d15-4290-bbab-194621163837/iso-ts-22133-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Introduction.....	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Abbreviated terms	4
5 Test scenario illustration.....	5
6 General requirements and recommendations.....	6
6.1 Function overview.....	6
6.2 Test object coordinate system	6
6.2.1 Vehicle.....	6
6.2.2 Moveable test objects other than vehicle	7
6.3 Test scenario coordinate system	9
6.3.1 Background info: tectonic/continental plate drift.....	9
6.3.2 Coordinate system – Tests on proving ground	9
6.3.3 Coordinate system – Test on other test areas	10
6.4 Time requirements	10
6.4.1 General time requirements	10
6.4.2 Time representation	10
6.4.3 Absolute time.....	10
6.4.4 Relative time	11
6.4.5 Time resolution.....	11
6.4.6 Time accuracy (and precision).....	11
6.4.7 Time synchronization.....	11
6.4.8 Date synchronization.....	12
6.4.9 Network delay.....	12
6.5 Communication requirements and permissions	13
7 Safety and risk assessment requirements and recommendations.....	14
7.1 General	14
7.2 Local test object fence and global geofence	15
7.2.1 Common requirements and recommendations	15
7.2.2 Global geofence	15
7.2.3 Local test object fence.....	15
8 Communication security requirements	17
9 Architecture and interfaces	17
9.1 General	17
9.2 Control centre and test object states	18
9.2.1 General.....	18
9.2.2 Test objects state diagram	18
9.2.3 Test object state change conditions.....	20
9.2.4 Control centre state diagram	20
9.2.5 Control centre state change triggers.....	21
9.3 Communication setup	22
9.3.1 General.....	22
9.3.2 Test object discovery	22
9.3.3 TCP communication setup (control channel)	22
9.3.4 UDP communication setup (process channel).....	23
9.3.5 File transfer protocol (FTP).....	25
9.4 Control functionalities.....	25

9.4.1	Automated and non-automated drive.....	25
9.4.2	Remote-control manoeuvring	26
10	Trajectory and scenario-based testing	28
10.1	Introduction to trajectory and scenario-based testing	28
10.2	Static trajectories	28
10.3	Dynamic trajectories.....	28
10.4	Scenario-description languages.....	29
11	Functional requirements	29
11.1	Device interface description XML (DIDX).....	29
11.2	Control centre requirements and recommendations	30
11.3	Stationary test object requirements.....	30
11.4	Moveable test object requirements and recommendations	30
11.5	Functions with behaviour description	31
11.5.1	Arm and disarm test object.....	31
11.5.2	Start test.....	32
11.5.3	Emergency stop of test scenario (initiated by the CC)	33
11.5.4	Emergency stop of test scenario (upon request from test object).....	34
11.5.5	Normal stop of test scenario.....	35
11.5.6	Download static (pre planned) trajectories	36
11.5.7	Cyclic monitor and heartbeat.....	36
11.5.8	Adaptive synchronization point.....	36
11.5.9	Remote-control manoeuvring	39
11.5.10	Trigger and action	40
12	Interface requirements	41
12.1	General.....	41
12.2	Message.....	42
12.2.1	Message structure	42
12.2.2	Sequential byte order	42
12.2.3	Message header.....	43
12.2.4	Message content.....	44
12.2.5	Message footer.....	45
12.2.6	Protocol tunnel.....	45
12.2.7	Vendor-specific messages	46
12.3	Collective message overview.....	46
12.3.1	Trajectory object message - TRAJ (MsgID 0x0001).....	48
12.3.2	Object setting message - OSEM (MsgID 0x0002)	51
12.3.3	Object state change request message - OSTM (MsgID 0x0003)	58
12.3.4	Start message -STRT (MsgID 0x0004).....	58
12.3.5	Heartbeat message - HEAB (MsgID 0x0005).....	59
12.3.6	Monitor message - MONR (MsgID 0x0006).....	61
12.3.7	Monitor message 2 - MONR2 (MsgID 0x0007)	64
12.3.8	GPS second of week roll over message - SOWM (MsgID 0x0008).....	66
12.3.9	Synchronization point configuration message - SYPM (MsgID 0x000B)	67
12.3.10	Master time to synchronization point message -MTSP (MsgID 0x000C).....	68
12.3.11	Remote-control manoeuvring message - RCMM (MsgID 0x000A)	68
12.3.12	Remote-control manoeuvring message 2 - RCMM2 (MsgID 0x0016).....	71
12.3.13	Trigger configuration message - TRCM (MsgID 0x0021).....	73
12.3.14	Action configuration message - ACCM (MsgID 0x0022)	76
12.3.15	Trigger event occurred message - TREO (MsgID 0x0023)	78
12.3.16	Execute action message - EXAC (MsgID 0x0024)	79
12.3.17	Cancel or delete trigger and action - CADE (MsgID 0x0025)	80
12.3.18	Action performed message - APEM (MsgID 0x0026).....	80
12.3.19	Discovery request DREQ (MsgID 0x0010)	81

12.3.20	Discovery response DRES (MsgID 0x0011)	81
12.3.21	Parameter request message - PREQ (MsgID 0x0012)	82
12.3.22	Parameter response message PRES (MsgID 0x0013)	83
12.3.23	GeoFence message GEOF (MsgID 0x0009)	84
12.3.24	General data message - GEDM (MsgID 0x0017)	85
12.3.25	General response message - GREM (MsgID 0x0018)	87
Annex A (normative) Trajectory file format		89
Annex B (informative) Message footer checksum calculation		92
Annex C (informative) Trigger and action		95
Annex D (normative) Device interface description XML (DIDX)		100
Bibliography		102

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/TS 22133:2023

<https://standards.iteh.ai/catalog/standards/sist/49560681-8d15-4290-bbab-194621163837/iso-ts-22133-2023>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 33, *Vehicle dynamics and chassis components*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Testing of collision avoidance systems, active safety functions and more advanced autonomous functions in vehicles require testing on proving grounds. The purpose is to expose the vehicle under test to potentially dangerous traffic situations in a safe manner. The evaluation is done during development, and in voluntary and mandatory test procedures.

To orchestrate these traffic scenarios, various impactable targets representing traffic actors are controlled. The number of controlled targets may be one or many depending on the required traffic situation scenario. Several requirements are important ranging from safety, to position and speed precision, to logging capabilities.

This document specifies requirements, functionality and a protocol allowing for multivendor target carrier systems to be controlled according to the required traffic situation scenario, to report expected information for logging purposes and other functions required.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 22133:2023](https://standards.iteh.ai/catalog/standards/sist/49560681-8d15-4290-bbab-194621163837/iso-ts-22133-2023)

<https://standards.iteh.ai/catalog/standards/sist/49560681-8d15-4290-bbab-194621163837/iso-ts-22133-2023>

Road vehicles — Test object monitoring and control for active safety and automated/autonomous vehicle testing — Functional requirements, specifications and communication protocol

1 Scope

This document specifies requirements, procedures and message formats for controlling and monitoring of test targets, used for testing of active safety functions and autonomous vehicles.

The document specifies functionality and messaging for monitoring and controlling of test objects by a control centre facilitating an interoperable test object environment. This document defines a communication protocol which allows for the control centre to safely execute tests using test objects from multiple vendors.

This document does not specify the internal architecture of the test object nor control centre.

This document does not specify how testing of the vehicles shall be performed.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8601 (all parts), *Date and time — Representations for information interchange*

ISO 8855, *Road vehicles — Vehicle dynamics and road-holding ability — Vocabulary*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

test object

entity, as defined in ISO 34501, part of a traffic scenario under monitoring and control by the *control centre* (3.5)

Note 1 to entry: Two types of test objects exist; moveable and *stationary test objects* (3.4).

Note 2 to entry: A test object can have several attributes, see Figure 1.

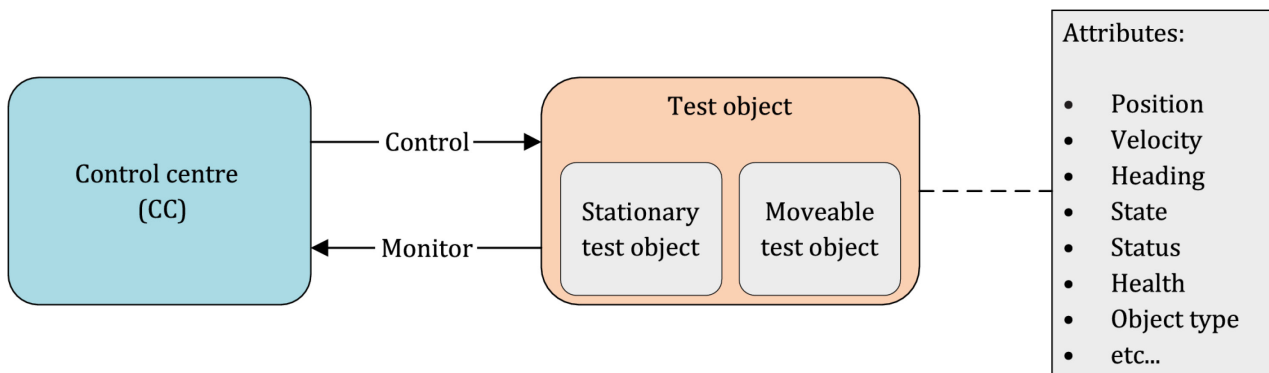


Figure 1 — Relations and inheritance view

3.2 subject vehicle

SV

vehicle to be tested with the system

Note 1 to entry: The subject vehicle, SV, is also known as vehicle under test, VUT.

Note 2 to entry: There may be one subject vehicle (standard setup) or a set of subject vehicles in the specific traffic scenario.

Note 3 to entry: The subject vehicle may be under safety-driver control and/or under *control-centre* (3.5) control.

Note 4 to entry: The subject vehicle is an instantiated *test object* (3.1) in either type of: *stationary test object* (3.4) or *moveable test object* (3.3).

3.3 moveable test object

object under control by the *control centre* (3.5) which has the capability of activation of physical movement

Note 1 to entry: The *subject vehicle* (3.2) is typically a moveable test object.

Note 2 to entry: Various levels of control are possible: open-loop control (using no feedback from the real-time activities of other *test objects* (3.1) or environment) and closed-loop control (taking into account activities of other test objects in real-time and environment). One other type of controlling/triggering is related to test object unique features like: turn indicator, headlight beam, etc.

EXAMPLE Traffic simulation vehicles, also known as traffic support vehicles (TSV), soft crash targets (SCT).

3.4 stationary test object

part of a traffic scenario, which is not moveable but may be under control by the *control centre* (3.5)

Note 1 to entry: A VUT may also be a stationary test object.

Note 2 to entry: Different stationary test objects can exist. Normally they are divided in to two groups: active and passive infrastructure elements (ISE).

EXAMPLE Active ISE: traffic lights, lighting, rain/snow/fog simulator. Passive ISE: elements of construction area, road signs, guardrails, etc.

3.5 control centre

CC

centralized or distributed service for *test-object* (3.1) control and safety monitoring including provision of communication services to the test objects

3.6**path**

set of local or global positions in respect to a point of origin and in respect to the orientation to the axes of a defined coordinate system (x,y,z)

3.7**lateral path deviation**

position error of the target vehicle relative to the planned *path* (3.6) measured perpendicular from the planned path direction

[SOURCE: ISO 19206-3:2021, 3.8, modified — Notes to entry and figure removed.]

3.8**trajectory**

path (3.6) where a *test object* (3.1) is or is intended to move along including test-object dynamics (i.e. including timing)

Note 1 to entry: A trajectory contains a path and additionally the test-object dynamics (such as time, yaw, velocity, acceleration, etc.) for each position on the path.

Note 2 to entry: All test-object parameters related to test-object dynamic (e.g. limitations in acceleration) are described in the corresponding DIDX-file.

3.9**static trajectory**

offline pre-planned *trajectory* (3.8) including *test-object* (3.1) position and test-object motion dynamics for a single *moveable test object* (3.3) as part of the traffic scenario

Note 1 to entry: The trajectory is downloaded to the test object utilizing the trajectory object message (TRAJ).

Note 2 to entry: The parameters used by the test object are described in the DIDX-file.

Note 3 to entry: The *control centre* (3.5) extracts information from the trajectory file and builds a trajectory message, TRAJ, that is understandable by the test object.

3.10**dynamic trajectory**

trajectory (3.8) which at the start of the scenario execution is not known by the *test object(s)* (3.1) nor the *control centre (CC)* (3.5)

Note 1 to entry: The dynamic trajectory is created based on events and actions during the ongoing test.

Note 2 to entry: The dynamic trajectory is continuously sent by the CC or gated through the CC in smaller pieces/fragments utilizing the trajectory object message (TRAJ).

Note 3 to entry: In the case where the test object(s) or other systems (e.g. a simulation environment) are generating the dynamic trajectory this information shall be gated by sending to the CC and then from the CC to the test object.

3.11**test scenario**

scenario, as defined in ISO 34501, including all *test objects* (3.1), moveable and stationary, and the definition of the planned activities over time or/and location

Note 1 to entry: The traffic scenario can be formally represented by two complementary descriptions enabling test execution, a *scenario description* (3.12), and a map of the test area.

3.12**scenario description**

textual representation of a scenario

Note 1 to entry: A scenario description can be used in combination with a *scenery description* (3.13) to generate *trajectories* (3.8) (static or dynamic) by the *control centre* (3.5) or at a *test object* (3.1).

EXAMPLE: *Test scenario* (3.11) described using OpenSCENARIO or iSCAML ^[17].

3.13

scenery description

representation of the test area limited to the road geometry (e.g. lanes and junctions) and *stationary test objects* (3.4) (e.g. road signs and markings)

Note 1 to entry: A scenery description can be used in combination with a *scenario description* (3.12) to generate *trajectories* (3.8) (static or dynamic) by the *control centre* (3.5) or at a *test object* (3.1).

EXAMPLE: Temporary lane-setup on a proving ground, described using OpenDRIVE.

3.14

safety speed limit

maximum allowed speed when repositioning *moveable test objects* (3.3) while not participating in ongoing test

Note 1 to entry: The *test object* (3.1) is manually driven with the remote-control functionality or automatically driven when outside the test execution phase.

3.15

device ID

unique identifier for each entity in the test setup

Note 1 to entry: The device ID number is used as transmitter ID or receiver ID in every message except when tunnelling data.

3.16

message gating

mechanism to gate messages from a sender to a receiver defined by the transmitter ID and receiver ID in the message header

Note 1 to entry: *Control-centre* (3.5) gating messages from one entity to another do not alter the transmitter ID in the process of message gating.

4 Abbreviated terms

ASP	Adaptive Synchronization Point
DIDX	Device Interface Description XML
ECEF	Earth-Centred, Earth-Fixed (geographical coordinate system)
GNSS	Global Navigation Satellite System
GPS	Global Positioning System (one constellation of GNSS)
ISE	Infrastructure Elements
NTP	Network Time Protocol
NTRIP	Networked Transport of RTCM via Internet Protocol
OWD	One-Way Delay / End-to-end delay
PGRS	Proving Ground Reference System
PTP	Precision Time Protocol
RPM	Reference Point Marker (physical reference point on the proving ground)
RTK	Real Time Kinematic
SCT	Soft Crash Targets
SOW	Second Of Week (in respect to GPS time)
SV	Subject Vehicle, also known as VUT

TAI	International Atomic Time
TCP	Transmission Control Protocol – Connection oriented communication between a server and client
TSV	Traffic Simulation Vehicles
UDP	Used Datagram Protocol - Connectionless communication model
UTM	Universal Transverse Mercator (a two-dimensional Cartesian coordinate system for locations on the surface of the Earth)
VUT	Vehicle Under Test
WGS84	World Geodetic System 1984
CC	Control Centre





5 Test scenario illustration

The illustration of a test scenario in Figure 2 is used as an example to explain a possible test scenario with various test objects. The test objects present in the example scenario are categorised in types and sub types in Table 1. The example does not include all possible test objects and scenarios referred to in this document.

To be able to achieve the following scenario, several different mechanisms can be used to control and monitor all different test objects, which will be described later in this document. Some or all test objects can be controlled by a CC but may also be controlled by a safety driver or by an integrated controller. All test objects are always monitored by the CC.

A test scenario is normally described in a story board or segment description.

Table 1 — Test object type categorization example

Test object type	Test object sub type	Illustration
Stationary test objects	Active infrastructure elements (A-ISE)	
	Passive infrastructure elements (P-ISE)	
Moveable test objects	Object controlled/monitored by the CC (TSV/SCT)	
	Subject vehicle (SV/VUT)	

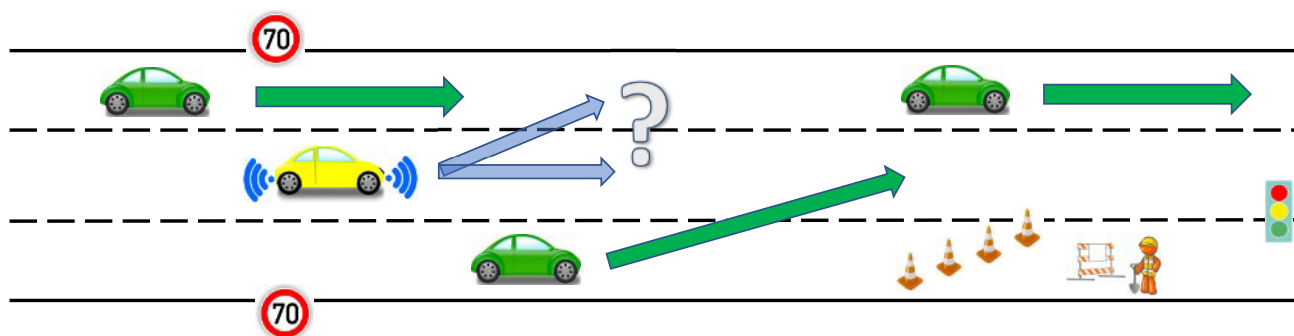


Figure 2 — Example of test scenario

6 General requirements and recommendations

6.1 Function overview

Several techniques and methods used for function and safety testing of autonomous moving test objects are covered by this document and listed below:


- a) test scenario execution,
- b) static and dynamic trajectory following,
- c) trigger and actions,
- d) adaptive synchronization points (master/slave),
- e) remote control driving,
- f) object-to-object communication,
- g) safety features:
 - emergency stop,
 - arm/disarm,
 - time synchronization,
 - geofencing,
 - centralized control.

6.2 Test object coordinate system

6.2.1 Vehicle

Vehicle coordinate system orientation shall follow ISO 8855. See Figure 3.

If not otherwise stated, the geometrical centre which is the centre of the bounding box of the test object projected on the ground is used as the origin of the coordinate system.

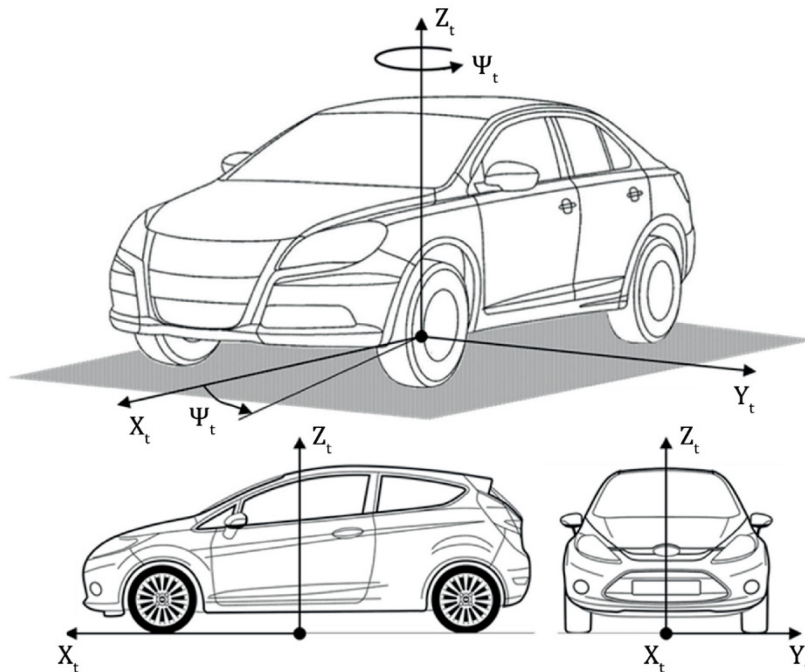

NOTE ψ_t is the rotation about the z_t axis.

Figure 3 — Vehicle reference coordinate system (Source: ISO 19206-3:2021, Figure 2)

6.2.2 Moveable test objects other than vehicle

6.2.2.1 Bicyclist

Origin is the centre of pedal crankshaft, projected on the ground, see Figure 4 (see also ISO 19206-4:2020, Figure A.1).

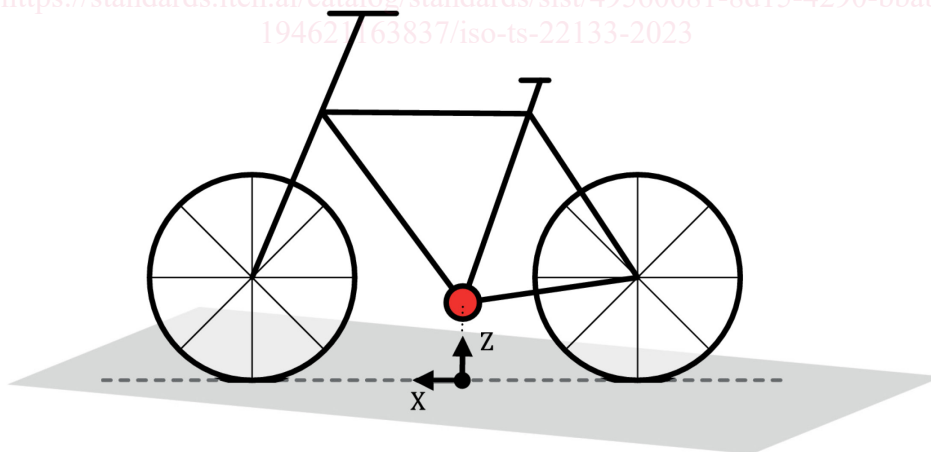


Figure 4 — Bicyclist reference coordinate system

6.2.2.2 Pedestrian

Origin is the centre between the hips, projected on the ground, see Figure 5 (see also ISO 19206-2:2018, Figure A.1).