INTERNATIONAL STANDARD

ISO 8404

Fourth edition

Tools for moulding — Angle pins

Outillage de moulage — Doigts de démoulage

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF 8404 https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-76b5c953b51f/iso-prf-8404

PROOF/ÉPREUVE



Reference number ISO 8404:2021(E)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF 8404 https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-76b5c953b51f/iso-prf-8404



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Page

Contents

| Forew | ordi | V |
|--------|--|------------------------------|
| Introd | luction | v |
| 1 | Scope | 1 |
| 2 | Normative references | 1 |
| 3 | Terms and definitions | 1 |
| 4 | Dimensions 4.1 Type A — Headed angle pins 4.2 Type B — Straight angle pins 4.3 Type C — Angle pins mounted with external thread 4.4 Type D — Angle pins mounted with hexagon socket head cap screw | 1 1 2 3 4 |
| 5 | Material and hardness | 5 |
| 6 | Designation | 6 |
| Biblio | graphy | 7 |

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF 8404 https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-76b5c953b51f/iso-prf-8404

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 8, *Tools for pressing and moulding*.

https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-


This fourth edition cancels and replaces the **third edition** (**ISO 84**04:2013) which has been technically revised.

The main changes compared to the previous edition are as follows:

- addition of two new types of angle pins: angle pins mounted with external thread (type C) and angle pins mounted with hexagon socket head cap screw (type D);
- correction of <u>Figure 1</u>;
- addition of an indication of surface roughness under the head of headed angle pins (Figure 2);
- modification of the height of headed angle pins of diameter $D_1 = 40$.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at <u>www.iso.org/members.html</u>.

Introduction

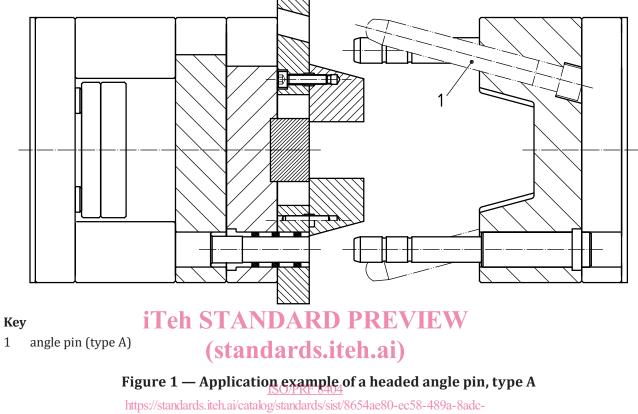

An example of an application of this document is shown in <u>Figure 1</u>.

76b5c953b51f/iso-prf-8404

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF 8404 https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-76b5c953b51f/iso-prf-8404

Tools for moulding — Angle pins

1 Scope

This document specifies the basic dimensions, in millimetres, of headed angle pins (type A), straight angle pins (type B), angle pins mounted with external thread (type C) and angle pins mounted with hexagon socket head cap screw (type D), intended for use in diecasting dies and tools for moulding.

It also specifies the material hardness and designation of the angle pins (types A, B, C and D).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2768-1, General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications

ISO 4957, Tool steels

iTeh STANDARD PREVIEW

3 Terms and definitions(standards.iteh.ai)

No terms and definitions are listed in this document. ISO/PRF 8404

ISO and IEC maintain terminological databases for use in standardization at the following addresses:


- 76b5c953b51f/iso-prf-8404
 ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at <u>http://www.electropedia.org/</u>

4 Dimensions

4.1 Type A — Headed angle pins

The dimensions of headed angle pins shall be in accordance with the indications of Figure 2 and Table 1.

Dimensions in millimetres surface roughness values in micrometres

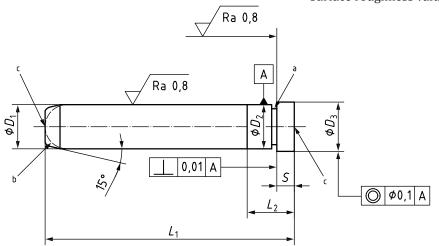

- ^a Radius or undercut.
- ^b The leading end can be rounded. The choice of shape is left to the manufacturer's discretion.
- ^c Optional centres.

The general tolerance shall be ISO 2768-m according to ISO 2768-1. EVIEW

Figure 2 St Type A headed angle pins

Table 1 — Dimensions of type A, headed angle pins


| | | 1 | 76b5c95 | | Dimensions in millimetre | | | |
|--|------|----|---------|---------------------|--------------------------|----|----|--|
| D ₁ g6 D ₂ m6 | - 10 | 12 | 16 | 20 | 25 | 32 | 40 | |
| S _{min} | 3 | 6 | 8 | 8 | 16 | 16 | 18 | |
| D _{3 0} _0,2 | 14 | 16 | 20 | 25 | 30 | 38 | 48 | |
| L ₁ 0 1-1,5 | | | | $L_2^{-0,5}_{-1,0}$ | | | | |
| 63 | 16 | 16 | | | | | | |
| 80 | 16 | 16 | 26 | | | | | |
| 100 | 22 | 22 | 26 | 30 | | | | |
| 125 | 22 | 22 | 26 | 30 | | | | |
| 160 | | | 36 | 40 | | | | |
| 200 | | | 36 | 40 | 42 | 47 | 54 | |
| 250 | | | | 40 | 42 | 47 | 62 | |
| 315 | | | | | 42 | 54 | 62 | |
| 400 | | | | | | 54 | 62 | |
| 500 | | | | | | | 71 | |

4.2 Type B — Straight angle pins

The dimensions of straight angle pins shall be in accordance with the indications of Figure 3 and Table 2.

ISO 8404:2021(E)

Dimensions in millimetres surface roughness values in micrometres

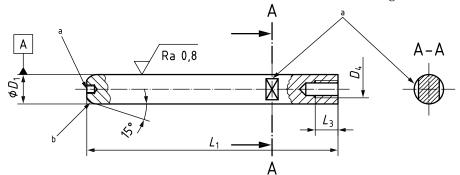

- ^a Position and dimensions of width across flats or alternatively hexagon sockets are left to the manufacturer's discretion.
- ^b The leading end can be rounded. The choice of shape is left to the manufacturer.

The general tolerance shall be ISO 2768-m according to ISO 2768-1.

Figure 3 — Type B, straight angle pin


| Dimensions in millimetres | | | | | | | | | | | |
|---|---------------|----------------------------|---|---------------------------|-----------------------|-----|-----|--|--|--|--|
| <i>D</i> ₁ k6 | | 10 12 | | 16 | 20 | 25 | 32 | | | | |
| <i>D</i> ₄ | | M6 ISMERF 84 | | 04 M8 | M10 | M12 | M16 | | | | |
| $L_3 + 1,5$ | https://st | andard s.2 eh.ai/ca | talog/s th2 dards/s b5c953b51f/iso | sist/865 16 e80-ec | 58-48 20 8adc- | 24 | 32 | | | | |
| | 63 | X | X | X | х | | | | | | |
| | 80 | х | х | х | х | Х | | | | | |
| | 100 | Х | Х | х | х | Х | х | | | | |
| | 125 | Х | Х | х | х | Х | х | | | | |
| $L_{1 0} -1,5$ | 160 | | | х | х | Х | Х | | | | |
| -1,5 | 200 | | | х | х | Х | х | | | | |
| | 250 | | | | х | Х | Х | | | | |
| | 315 | | | | | Х | Х | | | | |
| | 400 | | | | | | Х | | | | |
| Кеу | | | | | | | | | | | |
| x standardiz | ed dimensions | | | | | | | | | | |
| NOTE Tolerance classes and limit deviations are defined in ISO 286-2. | | | | | | | | | | | |

Table 2 — Dimensions of type B, straight angle pin

4.3 Type C — Angle pins mounted with external thread

The dimensions of angle pins mounted with external thread shall be in accordance with the indications of Figure 4 and Table 3.

Dimensions in millimetres surface roughness values in micrometres

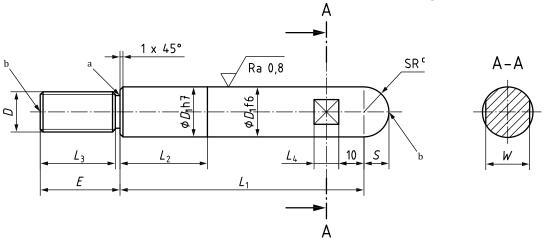

- ^a Radius or undercut.
- ^b Optional centres.
- c SR = $D_1/2$.

The general tolerance shall be ISO 2768-m according to ISO 2768-1. **The STANDARD PREVIEW** NOTE Tolerance classes and limit deviations are defined in ISO 286-2. **Standards.iteh.ai**

Figure 4 — Type C, angle pins mounted with external thread ISO/PRF 8404

https://standards.iteh.ai/catalog/standards/sist/8654ae80-ec58-489a-8adc-

Table 3 — Dimensions of type **C** angle pins mounted with external thread

| <i>D</i> ₁ | D | L ₂ | <i>L</i> ₃ | L_4 | Е | S | W | $L_1 \pm 0,2$ | | | | | | | | |
|---------------------------|-----|--|-----------------------|-------|----|-----|----|---------------|----|----|----|-----|-----|-----|-----|-----|
| | | | | | | | | 40 | 50 | 60 | 80 | 100 | 125 | 160 | 200 | 250 |
| 10 | M6 | 0≤ <i>L</i> ₂ < <i>L</i> ₁ | 15 | 8 | 17 | 5 | 7 | Х | х | Х | Х | Х | Х | х | х | |
| 12 | M8 | | 20 | 10 | 22 | 6,5 | 10 | | х | Х | Х | Х | Х | х | х | х |
| 16 | M12 | | 25 | 10 | 27 | 8 | 13 | | Х | Х | Х | Х | Х | х | x | х |
| 20 | M16 | | 30 | 12 | 32 | 10 | 17 | | | х | Х | х | Х | х | х | х |
| Key | | | | | | | | | | | | | | | | |
| x standardized dimensions | | | | | | | | | | | | | | | | |

4.4 Type D — Angle pins mounted with hexagon socket head cap screw

The dimensions of angle pins mounted with hexagon socket head cap screw shall be in accordance with the indications of <u>Figure 5</u> and <u>Table 4</u>.