

~~TC/SC~~

~~Date: 2022-11-30~~

~~ISO/PRF 11992-2:2022(E)~~

~~TC/SC/AVG Date: 2022-12-15~~

~~ISO 11992-2:2022(E)~~

~~ISO/TC 22/SC 31/WG 4~~

Secretariat: ~~DIN~~

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 11992-2

<https://standards.iteh.ai/catalog/standards/sist/8d98c50b-fa6b-457b-bd72-bb9390cee4f9/iso-11992-2>

Document type:
Document subtype:
Document stage:
Document language:

Edited DIS - MUST BE USED FOR FINAL DRAFT



Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 2: Application layer for brakes and running gear

Véhicules routiers — Échange d'informations numériques sur les connexions électriques entre véhicules tracteurs et véhicules tractés — Partie 2: Couche d'application pour les équipements de freinage et les organes de roulement

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 11992-2

<https://standards.iteh.ai/catalog/standards/sist/8d98c50b-fa6b-457b-bd72-bb9390cee4f9/iso-11992-2>

Document type:
Document subtype:
Document stage:
Document language:

Edited DIS - MUST BE USED FOR FINAL DRAFT

COPYRIGHT PROTECTED DOCUMENT

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

Ch. de Blandonnet 8 • CP 401

CH-1214 Vernier, Geneva, Switzerland

Tel. + 41 22 749 01 11

Fax + 41 22 749 09 47

copyright@iso.org

www.iso.org

www.iso.org

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 11992-2

<https://standards.iteh.ai/catalog/standards/sist/8d98c50b-fa6b-457b-bd72-bb9390cee4f9/iso-11992-2>

Contents	Page
Foreword	vii
Introduction	viii
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	4
4.1 Symbols	4
4.2 Abbreviated terms	4
5 Conventions	5
6 APP – Parameter specification	5
6.1 General definitions	5
6.2 APP – Identification parameter specification	6
6.2.1 APP – Axle/wheel identification	6
6.2.2 APP – Identification data index	8
6.2.3 APP – Identification data indexed content	9
6.3 APP – Braking systems parameter specification	10
6.3.1 APP – Park brake demand relative pressure	10
6.3.2 APP – Service brake demand pressure	10
6.3.3 APP – Vehicle service brake status	11
6.3.4 APP – Braking system wheel-based vehicle speed	11
6.3.5 APP – Vehicle retarder control status	11
6.3.6 APP – Retarder demand relative torque	12
6.3.7 APP – Retarder wheel torque reference	13
6.3.8 APP – Retarder relative peak torque	14
6.3.9 APP – Retarder actual maximum positive torque	14
6.3.10 APP – Retarder actual maximum negative torque	15
6.3.11 APP – Axle load sum	15
6.3.12 APP – Pneumatic supply pressure	15
6.3.13 APP – Brake lining	16
6.3.14 APP – Brake temperature	16
6.3.15 APP – Tyre pressure	16
6.3.16 APP – Automatic towed vehicle braking status	17
6.3.17 APP – Vehicle ABS status	17
6.3.18 APP – Vehicle electrical supply status	18
6.3.19 APP – Vehicle pneumatic supply status	18
6.3.20 APP – Spring brake installation status	18
6.3.21 APP – Electrical load proportional function installation status	19
6.3.22 APP – Load proportional function installation status	19
6.3.23 APP – ABS off-road request	19
6.3.24 APP – ASR brake control status	20
6.3.25 APP – ASR engine control status	20
6.3.26 APP – Pneumatic control line status	20
6.3.27 APP – Two electrical circuits brake demand status	21
6.3.28 APP – Tyre pressure status	21
6.3.29 APP – Brake lining status	21

6.3.30	APP - Brake temperature status	22
6.3.31	APP - Brake light switch.....	22
6.3.32	APP - Vehicle type.....	22
6.3.33	APP - Red warning signal request	23
6.3.34	APP - Amber warning signal request.....	23
6.3.35	APP - Electrical supply of non-braking systems status.....	24
6.3.36	APP - Loading ramp approach assistance status	24
6.3.37	APP - VDC active	24
6.3.38	APP - Road curvature.....	25
6.3.39	APP - Wheel speed difference main axle	25
6.3.40	APP - Supply line braking.....	26
6.3.41	APP - Spring brake status.....	26
6.3.42	APP - Relative brake demand for front or left vehicle side	26
6.3.43	APP - Relative brake demand for rear or right vehicle side	27
6.3.44	APP - Support of side- or axle-wise brake force distribution	27
6.3.45	APP - Lateral acceleration.....	27
6.3.46	APP - Stop lamps request	28
6.3.47	APP - Braking via electric control line support.....	28
6.3.48	APP - Geometric data index.....	28
6.3.49	APP - Geometric data indexed content	29
6.3.50	APP - Brake cylinder pressure first axle, left wheel	33
6.3.51	APP - Brake cylinder pressure first axle, right wheel	33
6.3.52	APP - Brake cylinder pressure second axle, left wheel.....	34
6.3.53	APP - Brake cylinder pressure second axle, right wheel.....	34
6.3.54	APP - Brake cylinder pressure third axle, left wheel	35
6.3.55	APP - Brake cylinder pressure third axle, right wheel	35
6.3.56	APP - Wheel speed first axle, left wheel.....	35
6.3.57	APP - Wheel speed first axle, right wheel.....	36
6.3.58	APP - ROP system status.....	36
6.3.59	APP - YC system status	37
6.3.60	APP - Towed vehicle ROP system request.....	37
6.3.61	APP - Towed vehicle YC system request.....	37
6.3.62	APP - Vehicle combination ABS status	38
6.3.63	APP - Towed vehicle detection status	38
6.3.64	APP - Reverse gear status.....	38
6.3.65	APP - External brake request status	39
6.3.66	APP - Emergency braking status.....	39
6.4	APP - Running gear equipment parameter specification	40
6.4.1	APP - Driven axle load.....	40
6.4.2	APP - Nominal vehicle body level, front axle.....	40
6.4.3	APP - Nominal vehicle body level, rear axle.....	40
6.4.4	APP - Relative vehicle body level, front axle.....	41
6.4.5	APP - Relative vehicle body level, rear axle	41
6.4.6	APP - Level control request	42
6.4.7	APP - Level control status.....	42
6.4.8	APP - Level change request, front axle.....	42
6.4.9	APP - Level change request, rear axle	43
6.4.10	APP - Level change status, front axle	43
6.4.11	APP - Level change status, rear axle	43
6.4.12	APP - Lift axle 1 position request.....	44
6.4.13	APP - Lift axle 2 position request.....	44
6.4.14	APP - Lift axle 3 position request.....	44
6.4.15	APP - Lift axle 4 position request.....	45

6.4.16	APP - Lift axle 5 position request.....	45
6.4.17	APP - Lift axle 1 position.....	46
6.4.18	APP - Lift axle 2 position.....	46
6.4.19	APP - Lift axle 3 position.....	46
6.4.20	APP - Lift axle 4 position.....	47
6.4.21	APP - Lift axle 5 position.....	47
6.4.22	APP - Steering axle locking request.....	47
6.4.23	APP - Steering axle locking status.....	48
6.4.24	APP - Traction help (load transfer) request.....	48
6.4.25	APP - Traction help (load transfer) status.....	48
6.4.26	APP - Ride height request.....	49
6.4.27	APP - Ride height level.....	49
6.4.28	APP - Normal level.....	50
6.4.29	APP - Ramp level request.....	50
6.4.30	APP - Ramp level.....	50
6.4.31	APP - Ramp level position.....	51
6.4.32	APP - Ramp level storage request.....	51
6.4.33	APP - Ramp level storage status.....	51
6.4.34	APP - Stop level change request.....	52
6.4.35	APP - Stop level change request acknowledge.....	52
6.4.36	APP - Parking and towed vehicle air pressure.....	52
6.4.37	APP - Auxiliary equipment supply pressure.....	53
6.4.38	APP - Tyre pressure threshold detection.....	53
6.4.39	APP - Air leakage detection.....	54
6.4.40	APP - Tyre temperature.....	54
6.4.41	APP - Tyre module power supply status.....	55
6.5	APP - Axle load parameter specification.....	55
6.5.1	APP - Axle load.....	55
6.5.2	APP - Axle load calibration data storage request.....	55
6.5.3	APP - Axle load calibration data storage status.....	56
6.5.4	APP - Axle load measured by external scale.....	56
6.5.5	APP - Axle load measured by towed vehicle.....	57
6.5.6	APP - Axle load calibration data load level.....	57
6.5.7	APP - Axle load calibration type.....	58
6.5.8	APP - Maximum driven axle load.....	58
6.6	Ride height parameter specification.....	59
6.6.1	APP - Extended ride height and ramp level storage.....	59
6.6.2	APP - Ride height and ramp level set request.....	59
6.6.3	APP - Ride height storage request.....	59
6.6.4	APP - Ride height storage.....	60
6.6.5	APP - Neutral gear request.....	60
6.6.6	APP - Rear obstacle distance.....	60
6.6.7	APP - Immobilizer status.....	61
6.6.8	APP - Fifth wheel load.....	61
6.6.9	APP - Ambient air temperature.....	61
6.6.10	APP - Parking brake status.....	62
6.6.11	APP - Neutral gear status.....	62
6.7	APP - Software update parameter specification.....	62
6.7.1	APP - Vehicle software update request.....	62
6.7.2	APP - Vehicle software update request acknowledgement.....	63
7	APP - PG specification.....	63
7.1	APP - Overview of PGs.....	63

7.2	APP – Message transmission in case of multiple towed vehicles	65
7.3	APP – Towing vehicle	65
7.3.1	APP – General specification	65
7.3.2	APP – General PGs, transmitted from the towing to the towed vehicle	66
7.3.3	APP – Electronic brake system PGs, transmitted from the towing to the towed vehicle	66
7.3.4	APP – Running gear equipment PGs, transmitted from the towing to the towed vehicle	69
7.4	APP – Towed vehicle	71
7.4.1	APP – General PGs, transmitted from the towed to the towing vehicle	71
7.4.2	APP – Electronic brake system PGs, transmitted from the towed to the towing vehicle	71
7.4.3	APP – Running gear equipment PGs, transmitted from towed to towing vehicle	77
8	APP – Address assignment	81
8.1	APP – General requirements	81
8.2	APP – Road train configuration	81
8.3	APP – Address assignment method of a towing and towed vehicle	81
8.4	APP – Vehicle node capabilities	82
9	SI – Service interface definition between application and OSI layers	84
9.1	SI – A Data.req, A Data.ind, and A Data.con service interface	84
9.2	SI – A Data.req, A Data.ind, and A Data.con service interface parameter mapping	84
9.3	SIP – Service interface data type definitions	85
10	AL – Application layer	85
10.1	AL – Message PDU format	85
10.2	AL – A PDU specification	85
11	PL – Presentation layer	85
Annex A (normative) Geometric dimensions		86
A.1	Geometrical data definition	86
A.2	Semi towed vehicle geometric measurements	86
A.3	Full towed vehicle geometric measurements	87
A.4	Centre-axle towed vehicle geometric measurements	88
A.5	Link towed vehicle geometric measurements	88
A.6	Converter towed vehicle geometric measurements	89
A.7	Towing vehicle type 1 geometric measurements	90
A.8	Towing vehicle type 2 geometric measurements	90
Annex B (normative) Software update request and acknowledge interaction between towing and towed vehicles		92
B.1	Towed vehicle system software update	92
B.2	State machine of towed vehicle	93
B.3	State machine of towing vehicle	95
Annex C (informative) Message flow		100
C.1	Message flow nodes	100
C.2	EBS message flow from towing and towed vehicles to successor vehicles	100
C.3	EBS message flow from towed vehicles to predecessor vehicles	101
C.4	RGE message flow from towing and towed vehicles to successor vehicles	102
C.5	RGE message flow from towed vehicles to predecessor vehicles	103
Bibliography		105

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This fourth edition cancels and replaces the third edition (ISO 11992-2:2014), which has been technically revised.

The main changes are as follows:

~~Introduced~~ — **introduced** requirements structure;

~~Added~~ — **added** new parameter specifications;

~~Added~~ — **added** new message definitions;

~~Updated~~ — **updated** all ~~Figures~~**figures**;

A list of all parts in the [ISO 11992](#) series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO 11992-2:2023(E)

Introduction

The [ISO 11992](#) series specifies the interchange of digital information between road vehicles with a maximum authorised total mass greater than 3 500 kg, and towed vehicles, including communication between towed vehicles in terms of parameters and requirements of the lower OSI layers (physical and data link layer) of the electrical connection used to connect the electrical and electronic systems.

This document is structured according to the Open Systems Interconnection (OSI) Basic Reference Model, in accordance with ISO/IEC 7498-1 and ISO/IEC 10731₂, which structures communication systems into seven layers. When mapped on this model, the application layer protocol and data link layer framework requirements specified/referenced in the [ISO 11992](#) series standard are structured according to [Figure 1](#).

[Figure 1](#) illustrates a simplified communication framework:

- vehicle normal communication framework,
- vehicle diagnostic communication framework,
- vehicle-specific use case framework, and
- vehicle lower-layers framework.

The vehicle normal communication framework is composed of this document and [-ISO 11992-3₂](#).

The vehicle diagnostic communication framework is composed of ISO 14229-1₂, ISO 14229-2₂, ISO 14229-3 and [-ISO 11992-4₂](#).

The vehicle-specific use case framework is composed of [-ISO 11992-4₂](#), ISO 22901-1 or vehicle manufacturer-specific diagnostic data definition.

[ISO 11992-2](#)

<https://standards.iteh.ai/catalog/standards/sist/8d98c50b-fa6b-457b-bd72-bb9390ccc4f9/iso-11992-2>

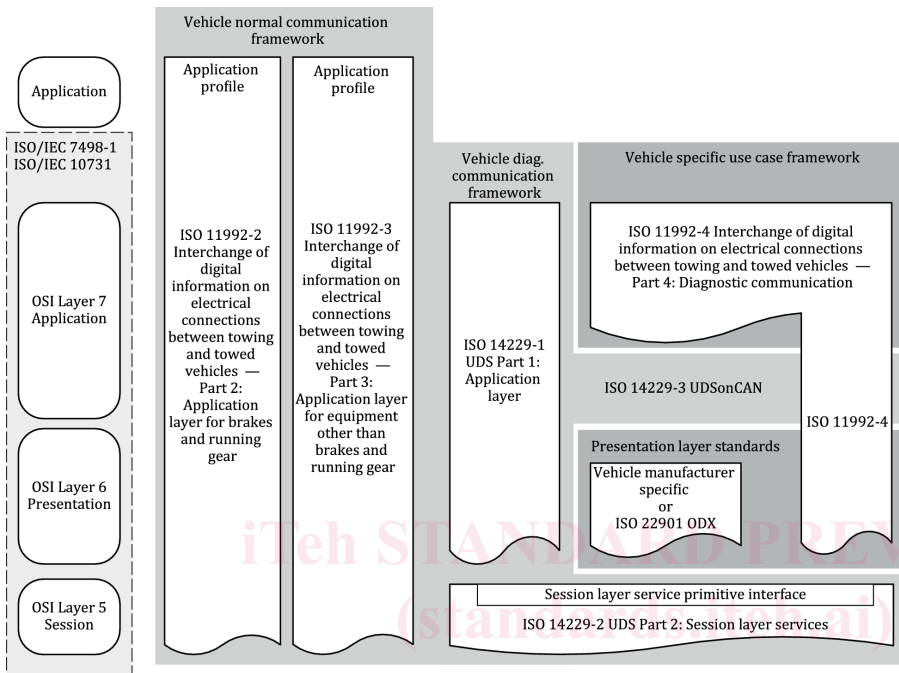


Figure 1 — Referenced documents according to the OSI model

<https://standards.iteh.ai/catalog/standards/sist/8d98c50b-fa6b-457b-bd72-bb9390ccc4f9/iso-11992-2>

Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 2: Application layer for brakes and running gear

1 Scope

This document specifies the SAE J1939-based application layer, the payload of messages, and parameter groups for electronically controlled braking systems, including anti-lock braking systems (ABS), vehicle dynamics control systems (VDC), and running gears equipment, to ensure the interchange of digital information between road vehicles with a maximum authorized total mass greater than 3 500 kg and their towed vehicles, including communication between towed vehicles.

Conformance and interoperability test plans are not part of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3779, *Road vehicles — Vehicle identification number (VIN) — Content and structure*

ISO 11992-1, *Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 1: Physical and data-link layers*

ISO 11992-3:2021, *Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 3: Application layer for equipment other than brakes and running gear*

ISO 80000-1, *Quantities and units — Part 1: General*

SAE J1939-21, *Recommended Practice for a Serial Control and Communications Vehicle Network — Data Link Layer*

SAE J1939-71: *Recommended Practice for a Serial Control and Communications Vehicle Network — Vehicle Application Layer*

SAE J1939-DA, *Recommended Practice for a Serial Control and Communications Vehicle Network — J1939 Digital Annex*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11992-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

ISO 11992-2:2023(E)

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1

ABS

anti-lock braking system

control function, which automatically modulates the pressure producing the braking forces at the wheels to limit the degree of wheel slip, or a system that provides an anti-lock braking function

3.2

ASR

anti-spin regulation

control function, which automatically modulates the engine torque or the pressure producing the braking forces at the wheels to limit the degree of wheel spin, or a system that provides an anti-spin control

3.3

axle group

assembly of two or more consecutive axles considered together in determining their combined load effect

3.4

centre-axle towed vehicle

towed vehicle (3.19) equipped with a rigid towing device, and in which the axle(s) is (are) positioned close to the centre of gravity of the vehicle

3.5

converter towed vehicle

dolly unit that couples to a *semi towed vehicle* (3.18) with a *fifth-wheel coupling* (3.8) and thereby “converts” the semi towed vehicle to a *full towed vehicle* (3.9)

3.6

EBS

electronic braking system

braking system in, which control is generated and processed as an electrical signal in the control transmission

3.7

ECU

electronic control unit

electronic item consisting of a combination of basic parts, subassemblies, and assemblies packaged together as a physically independent entity

3.8

fifth-wheel coupling

link between a *towing vehicle* (3.22) and a *towed vehicle*, (3.19), designed for towing a *semi towed vehicle* (3.18)

3.9

full towed vehicle

towed vehicle (3.19) equipped with a towing device, which can move vertically (in relation to the towed vehicle), and in which the axle(s) is (are) positioned farther from the centre of gravity of the vehicle

3.10

gateway

unit connecting different networks or parts of one network and performing any necessary protocol translation

3.11

link towed vehicle

towed vehicle (3.19) with a fifth-wheel coupling (3.8), designed for towing a semi towed vehicle (3.18)

3.12

network segment

part of a network that is within the domain of a single link layer

3.13

node

device capable of sending or receiving data whose identification will be unambiguous for authentication purposes

3.14

RGE

running rear equipment
equipment of a vehicle, including steering, suspension, and tyres

3.15

road train

combination of towing vehicle (3.22) and towed vehicles (3.19) connected via a communication link

3.16

road train session number

randomised number that is used to identify a set of vehicles that are connected via a communication link with their ECUs (3.7) powered up

3.17

ROP

roll-over prevention
roll-over protection

ROP

control function to prevent roll-over situations of a vehicle

Note 1 to entry: ROP is part of a VDC (3.23) function.

3.18

semi towed vehicle

towed vehicle (3.19), which is designed to be coupled to a semi towed vehicle towing vehicle and to impose a substantial part of its total weight on the towing vehicle (3.22)

3.19

towed vehicle

non-power-driven road vehicle, which, on account of its design and appointments, is used to transport persons or goods and is intended to be towed by a motor vehicle

3.20

towing full towed vehicle