



SLOVENSKI STANDARD
oSIST prEN IEC 63563-8:2024
01-julij-2024

Različica specifikacije Qi 2.0 - 8. del: Zaščita oznake Nfc (Hitri postopek)

Qi specification version 2.0 - Part 8: Nfc tag protection (Fast track)

iTeh Standards

Ta slovenski standard je istoveten z: **prEN IEC 63563-8:2024**

Document Preview

ICS:

oSIST prEN IEC 63563-8:2024

29.240.99	Druga oprema v zvezi z omrežji za prenos in distribucijo električne energije	Other equipment related to power transmission and distribution networks
33.160.99	Druga avdio, video in avdiovizuelna oprema	Other audio, video and audiovisual equipment
35.200	Vmesniška in povezovalna oprema	Interface and interconnection equipment

oSIST prEN IEC 63563-8:2024

en,fr,de



100/4129/CDV

COMMITTEE DRAFT FOR VOTE (CDV)

PROJECT NUMBER:

IEC 63563-8 ED1

DATE OF CIRCULATION:

2024-05-03

CLOSING DATE FOR VOTING:

2024-07-26

SUPERSEDES DOCUMENTS:

IEC TA 15 : WIRELESS POWER TRANSFER	
SECRETARIAT: Korea, Republic of	SECRETARY: Mr Ockwoo Nam
OF INTEREST TO THE FOLLOWING COMMITTEES: TC 106,TC 108	PROPOSED HORIZONTAL STANDARD: <input type="checkbox"/> Other TC/SCs are requested to indicate their interest, if any, in this CDV to the secretary.
FUNCTIONS CONCERNED: <input type="checkbox"/> EMC <input type="checkbox"/> ENVIRONMENT <input type="checkbox"/> QUALITY ASSURANCE <input type="checkbox"/> SAFETY	
<input type="checkbox"/> SUBMITTED FOR CENELEC PARALLEL VOTING	<input checked="" type="checkbox"/> NOT SUBMITTED FOR CENELEC PARALLEL VOTING

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Recipients of this document are invited to submit, with their comments, notification of any relevant "In Some Countries" clauses to be included should this proposal proceed. Recipients are reminded that the CDV stage is the final stage for submitting ISC clauses. (SEE [AC/22/2007](#) OR [NEW GUIDANCE DOC](#)).

TITLE:

Qi Specification version 2.0 - Part 8: NFC Tag Protection (Fast track)

PROPOSED STABILITY DATE: 2029

NOTE FROM TC/SC OFFICERS:

This document is only in PDF format. IEC and WPC agreed to use the pdf files as this is an adoption.

Copyright © 2024 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.



Qi Specification

NFC Tag Protection

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[oSIST prEN IEC 63563-8:2024](https://standards.iteh.ai/catalog/standards/sist/2a70f218-276e-484c-8bd6-e078a214ea80/osist-pren-iec-63563-8-2024)

<https://standards.iteh.ai/catalog/standards/sist/2a70f218-276e-484c-8bd6-e078a214ea80/osist-pren-iec-63563-8-2024>

Version 2.0

April 2023

COPYRIGHT

© 2023 by the Wireless Power Consortium, Inc. All rights reserved.

The **Qi Specification, NFC Tag Protection** is published by the Wireless Power Consortium and has been prepared by the members of the Wireless Power Consortium. Reproduction in whole or in part is prohibited without express and prior written permission of the Wireless Power Consortium.

DISCLAIMER

The information contained herein is believed to be accurate as of the date of publication, but is provided “as is” and may contain errors. The Wireless Power Consortium makes no warranty, express or implied, with respect to this document and its contents, including any warranty of title, ownership, merchantability, or fitness for a particular use or purpose. Neither the Wireless Power Consortium, nor any member of the Wireless Power Consortium will be liable for errors in this document or for any damages, including indirect or consequential, from use of or reliance on the accuracy of this document. For any further explanation of the contents of this document, or in case of any perceived inconsistency or ambiguity of interpretation, contact: info@wirelesspowerconsortium.com.

RELEASE HISTORY

Specification Version	Release Date	Description
2.0	April 2023	Initial release of the v2.0 Qi Specification.

<https://standards.iteh.ai>

<https://standards.iteh.ai/catalog/standards/sist/2a70f218-276e-484c-8bd6-e078a214ea80/osist-pren-iec-63563-8-2024>

Table of Contents

1	General	2
1.1	Structure of the Qi Specification	2
1.2	Scope	3
1.3	Compliance	3
1.4	References	3
1.5	Conventions	4
1.6	Power Profiles	6
2	Introduction	7
2.1	NFC tag detection and protection	7
3	NFC tag protection and device communication	9
4	NFC tag detection by a Power Transmitter Product	12
4.1	NFC antenna integration in a Power Transmitter Product	12
4.2	NFC transceiver integration	14
4.3	NFC polling	16
5	NFC tag detection by a Power Receiver Product	21
5.1	Design guidelines	21
5.2	Recommended detection procedure	21
6	Tag detection using the NFC unit	22
6.1	Low power object detection in standby	22
6.2	Low power object detection in the power transfer phase	22
7	Testing the impact of a Power Transmitter Product on an NFC tag	23
7.1	Test PICC dimensions	23
7.2	Construction of the Test PICC	23
7.3	Test PICC calibration	26
7.4	Test procedure using the Test PICC	26

1 General

The Wireless Power Consortium (WPC) is a worldwide organization that aims to develop and promote global standards for wireless power transfer in various application areas. A first application area comprises flat-surface devices such as mobile phones and chargers in the Baseline Power Profile (up to 5 W) and Extended Power Profile (above 5 W).

1.1 Structure of the Qi Specification

General documents

- Introduction
- Glossary, Acronyms, and Symbols

System description documents

- Mechanical, Thermal, and User Interface
- Power Delivery
- Communications Physical Layer
- Communications Protocol
- Foreign Object Detection
- NFC Tag Protection
- Authentication Protocol

Reference design documents

- Power Transmitter Reference Designs
- Power Receiver Design Examples

Compliance testing documents

- Power Transmitter Test Tools
- Power Receiver Test Tools
- Power Transmitter Compliance Tests
- Power Receiver Compliance Tests

NOTE: The compliance testing documents are restricted and require signing in to the WPC members' website. All other specification documents are available for download on both the WPC public website and the WPC website for members.

1.2 Scope

The *Qi Specification, NFC/RFID Card Protection* (this document) provides guidelines for detecting the presence of a Radio Frequency Identification (RFID) tag or Near Field Communication (NFC) card within the operating range of the Power Transmitter and preventing damage to the tag or card.

1.3 Compliance

All provisions in the *Qi Specification* are mandatory, unless specifically indicated as recommended, optional, note, example, or informative. Verbal expression of provisions in this Specification follow the rules provided in ISO/IEC Directives, Part 2.

Table 1: Verbal forms for expressions of provisions

Provision	Verbal form
requirement	“shall” or “shall not”
recommendation	“should” or “should not”
permission	“may” or “may not”
capability	“can” or “cannot”

1.4 References

For undated references, the most recently published document applies. The most recent WPC publications can be downloaded from <http://www.wirelesspowerconsortium.com>. In addition, the *Qi Specification* references documents listed below. Documents marked here with an asterisk (*) are restricted and require signing in to the WPC website for members.

- [Product Registration Procedure Web page](#)*
- [Qi Product Registration Manual, Logo Licensee/Manufacturer](#)*
- [Qi Product Registration Manual, Authorized Test Lab](#)*
- [Power Receiver Manufacturer Codes](#),* Wireless Power Consortium
- [The International System of Units \(SI\)](#), Bureau International des Poids et Mesures
- [Verbal forms for expressions of provisions](#), International Electrotechnical Commission

For regulatory information about product safety, emissions, energy efficiency, and use of the frequency spectrum, visit [the regulatory environment](#) page of the WPC members' website.

1.5 Conventions

1.5.1 Notation of numbers

- Real numbers use the digits 0 to 9, a decimal point, and optionally an exponential part.
- Integer numbers in decimal notation use the digits 0 to 9.
- Integer numbers in hexadecimal notation use the hexadecimal digits 0 to 9 and A to F, and are prefixed by "0x" unless explicitly indicated otherwise.
- Single bit values use the words ZERO and ONE.

1.5.2 Tolerances

Unless indicated otherwise, all numeric values in the *Qi Specification* are exactly as specified and do not have any implied tolerance.


1.5.3 Fields in a data packet

A numeric value stored in a field of a data packet uses a big-endian format. Bits that are more significant are stored at a lower byte offset than bits that are less significant. Table 2 and Figure 1 provide examples of the interpretation of such fields.

Table 2: Example of fields in a data packet

	b₇	b₆	b₅	b₄	b₃	b₂	b₁	b₀
B₀	(msb) 16-bit Numeric Data Field							
B₁	(lsb)							
B₂	Other Field					(msb)		
B₃	10-bit Numeric Data Field						(lsb) Field	

Figure 1. Examples of fields in a data packet

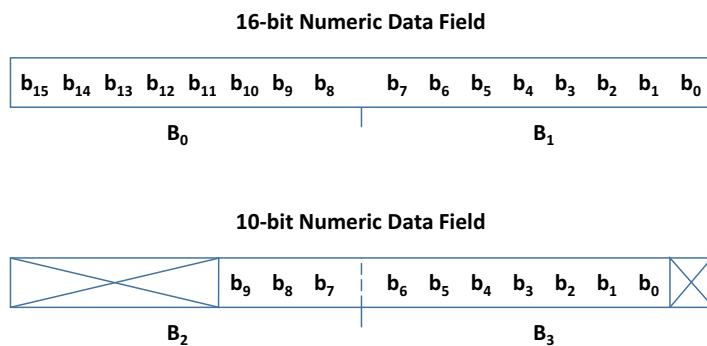

1.5.4 Notation of text strings

Text strings consist of a sequence of printable ASCII characters (i.e. in the range of 0x20 to 0x7E) enclosed in double quotes ("). Text strings are stored in fields of data structures with the first character of the string at the lowest byte offset, and are padded with ASCII NUL (0x00) characters to the end of the field where necessary.

EXAMPLE: The text string "WPC" is stored in a six-byte field as the sequence of characters 'W', 'P', 'C', NUL, NUL, and NUL. The text string "M:4D3A" is stored in a six-byte field as the sequence 'M', ':', '4', 'D', '3', and 'A'.

1.5.5 Short-hand notation for data packets

In many instances, the *Qi Specification* refers to a data packet using the following shorthand notation:

<MNEMONIC>/<modifier>

In this notation, <MNEMONIC> refers to the data packet's mnemonic defined in the *Qi Specification, Communications Protocol*, and <modifier> refers to a particular value in a field of the data packet. The definitions of the data packets in the *Qi Specification, Communications Protocol*, list the meanings of the modifiers.

For example, EPT/cc refers to an End Power Transfer data packet having its End Power Transfer code field set to 0x01.

ITeH Standards
(<https://standards.iteh.ai>)
Document Preview

oSIST prEN IEC 63563-8:2024

<https://standards.iteh.ai/catalog/standards/sist/2a70f218-276e-484c-8bd6-e078a214ea80/osist-pren-iec-63563-8-2024>

1.6 Power Profiles

A Power Profile determines the level of compatibility between a Power Transmitter and a Power Receiver. [Table 3](#) defines the available Power Profiles.

- *BPP PTx*: A Baseline Power Profile Power Transmitter.
- *EPP5 PTx*: An Extended Power Profile Power Transmitter having a restricted power transfer capability, i.e. $P_L^{(pot)} = 5 \text{ W}$.
- *EPP PTx*: An Extended Power Profile Power Transmitter.
- *BPP PRx*: A Baseline Power Profile Power Receiver.
- *EPP PRx*: An Extended Power Profile Power Receiver.

Table 3: Capabilities included in a Power Profile

Feature	BPP PTx	EPP5 PTx	EPP PTx	BPP PRx	EPP PRx
Ax or Bx design	Yes	Yes	No	N/A	N/A
MP-Ax or MP-Bx design	No	No	Yes	N/A	N/A
Baseline Protocol	Yes	Yes	Yes	Yes	Yes
Extended Protocol	No	Yes	Yes	No	Yes
Authentication	N/A	Optional	Yes	N/A	Optional