



Standard Test Methods for Evaluating Design and Performance Characteristics of Selectorized Strength Equipment¹

This standard is issued under the fixed designation F2277; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

The goal of these test methods is to provide reliable and repeatable methods for the evaluation of selectorized strength equipment. Users of these machines must recognize, however, that conformance to a standard will not necessarily prevent injuries. Like other physical activities, exercise involving strength equipment involves the risk of injury, particularly if the equipment is not maintained or used properly.

1. Scope

1.1 These test methods specify procedures and apparatus used for testing and evaluating selectorized strength equipment for compliance to Specification F2216. Both design and operational parameters will be evaluated. Where possible and applicable, accepted test methods from other recognized bodies will be used and referenced.

1.2 *Requirements*—Selectorized strength equipment is to be tested in accordance with these test methods or Test Methods F2571 for all of the following parameters:

- 1.2.1 Stability,
- 1.2.2 Edge and corner sharpness,
- 1.2.3 Tube ends,
- 1.2.4 Weight stack travel,
- 1.2.5 Weight stack selector pin retention,
- 1.2.6 Function of adjustments and locking mechanisms,
- 1.2.7 Handgrip design and retention,
- 1.2.8 Assist mechanisms,
- 1.2.9 Foot supports,
- 1.2.10 Rope and belt systems:
 - 1.2.10.1 Static load,
 - 1.2.10.2 End fitting design,
- 1.2.11 Chain drive design,
- 1.2.12 Pulley design:
 - 1.2.12.1 Rope pulley design,
 - 1.2.12.2 Belt pulley design,
- 1.2.13 Entrapment zones,
- 1.2.14 Pull in points,

- 1.2.15 Weight stack enclosure design,
- 1.2.16 Loading and deflection:
 - 1.2.16.1 Intrinsic loading and associated deflection,
 - 1.2.16.2 Extrinsic loading and associated deflection,
 - 1.2.16.3 Endurance loading, and
- 1.2.17 Documentation and warnings verification.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

- 2.1 *ASTM Standards*:²
 - F1749 Specification for Fitness Equipment and Fitness Facility Safety Signage and Labels
 - F2216 Specification for Selectorized Strength Equipment
 - F2571 Test Methods for Evaluating Design and Performance Characteristics of Fitness Equipment
- 2.2 *European Standards*:³
 - EN 957-1 Stationary Training Equipment—Part 1: General Safety Requirements and Test Methods

3. Terminology

- 3.1 *Definitions of Terms Specific to This Standard*:
 - 3.1.1 *normal operation, n*—the operation of the selectorized strength equipment as defined by the manufacturer.

¹ This test method is under the jurisdiction of ASTM Committee F08 on Sports Equipment, Playing Surfaces, and Facilities and is the direct responsibility of Subcommittee F08.30 on Fitness Products.

Current edition approved March 1, 2012. Published March 2012. Originally approved in 2003. Last previous edition approved in 2010 as F2277 – 03 (2010). DOI: 10.1520/F2277-12.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from CEN Management Centre, 36 rue de Stassart, B-1050, Brussels, Belgium.

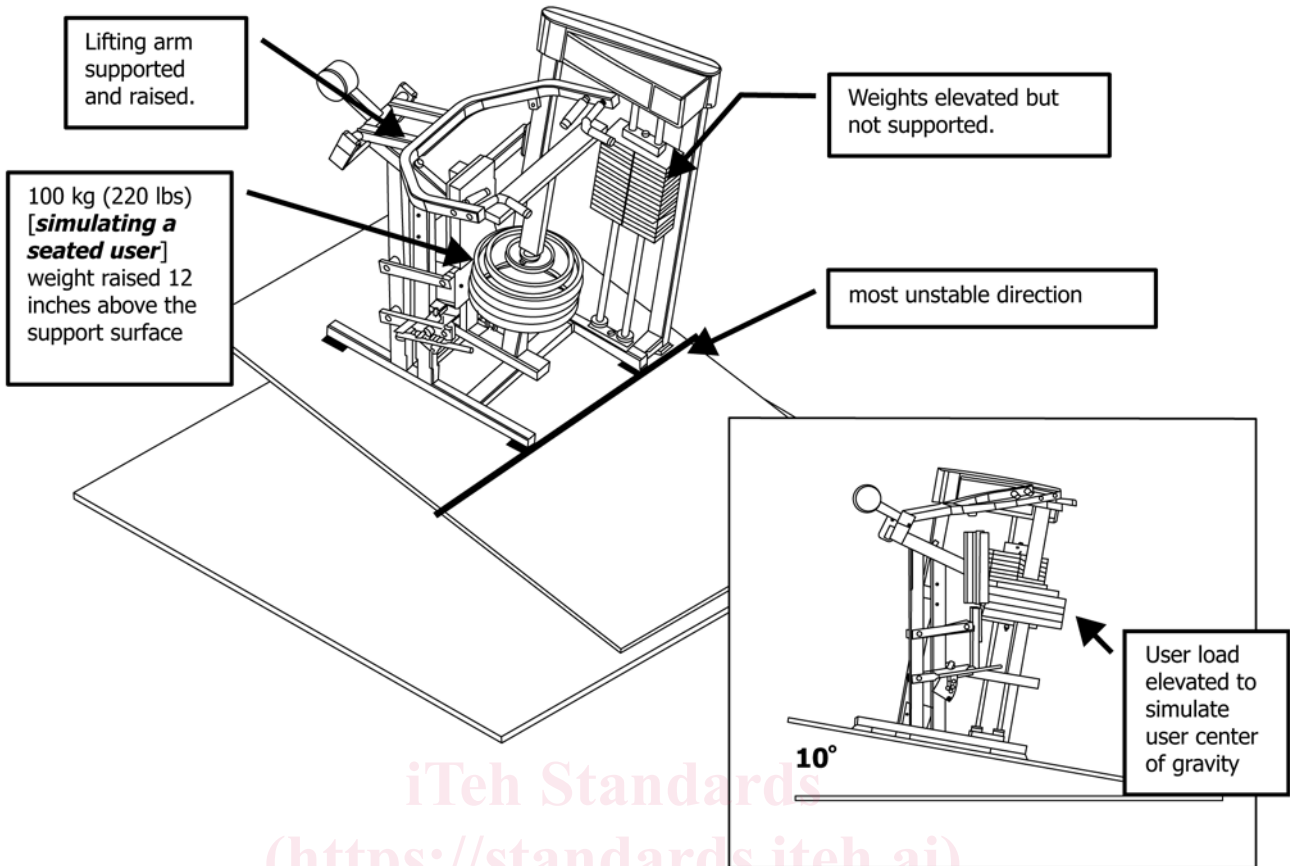


FIG. 1 Tilt Test

4. Significance and Use

4.1 The purpose of these test methods is to provide valid and repeatable test methods for the evaluation of selectorized strength equipment assembled and maintained according to the manufacturer's specifications. Use of these test methods in conjunction with Specification F2216 is intended to maximize the reliability of selectorized strength equipment design and reduce the risk of serious injury resulting from design deficiencies.

5. Certification

5.1 These test methods permit self-certification. It is recommended that each manufacturer employ an independent laboratory to evaluate and validate that their designs and test procedures conform and comply to these test methods and Specification F2216.

6. Units of Measure

6.1 The values stated in SI units are to be regarded as the standard. The values in parentheses are for information only.

7. Sample Preparation

7.1 Assemble and adjust the selectorized strength equipment according to the manufacturer's instructions. Remove upholstered pads from the sample. On machines that are fully assembled, verify according to the manufacturer's instructions that all components are functioning and that they have been

adjusted and aligned properly. Unless otherwise stated, the machine must pass the tests without adjustment from this initial condition. Selectorized strength equipment shall be provided with the largest weight stack offered by the manufacturer for the model to be tested.

7.2 The individual test methods will describe any variations or modifications that are required to the test sample.

8. Test Methods and Procedures

8.1 Stability:

8.1.1 Selectorized strength equipment shall be tested with and without the simulated user load in the orientation that is most obviously unstable.

8.1.2 *Apparatus and Set-Up*—Refer to Fig. 1. Place sample on a non-skid surface inclined at 10° in the orientation that is least stable. The sample shall rest on the supporting surface without anchoring unless the installation instructions for the machine require that the sample be anchored to the floor. If this is the case, then anchor the specimen per the manufacturer's recommendations. Determine how the user is placed on the machine to perform the exercise (that is, seating, standing, or prone) and then determine how the user's body weight is distributed onto the user support surfaces. For the simulated use test, a method of applying a steady state load equal to 100 kg (220 lb) simulating the user's weight and its distribution in the vertical direction at the point(s) of user contact must be provided. As an example, for a seated user, the user support

surface shall be adjusted to the uppermost position (if adjustable) and the center of gravity of the 100 kg (220 lb) load shall be positioned approximately 300 mm (12 in.) above the user support surface. Possible methods of providing this load include, but are not limited to, pneumatic cylinder(s) or dead weights.

8.1.3 *Calibration*—Using an angle measuring instrument accurate to within 0.1° , verify the non-skid surface is $10 \pm 0.5^\circ$. Calibrate the load measurement apparatus to confirm accuracy to within ± 20 N (4.5 lb) over entire 981 N (220 lb) range.

8.1.4 *Procedure*—Test the sample as follows:

8.1.4.1 With the sample machine (no user load applied) positioned on the tilt surface, verify that the sample does not tip over with the resistance means in the rest position.

8.1.4.2 Using the aforementioned load apparatus, distribute a vertical load equal to 100 kg (220 lb) $\pm 5\%$ in a non-impact manner to the specimen where the user contacts the machine during normal operation. (If only a portion of the user's body is supported by the machine during operation, the 100 kg (220 lb) simulated user weight shall be reduced by the appropriate amount.) Raise and support the lifting arms and weight stack to simulate the furthest point in the range of travel as encountered during normal operation of the machine by a user of 1.8 m (74 in.) stature. Verify that the sample does not tip over.

8.1.4.3 Repeat 8.1.4.1 and 8.1.4.2 with the sample oriented in any other directions of potential instability.

8.1.5 *Pass/Fail Criteria*—In none of the above test conditions shall the sample tip over.

8.1.6 *Precision and Bias*—No information is presented about either the precision or bias of test 8.1 for measuring stability since the test result is non-quantitative.

8.2 *Weight Stack Travel:*

8.2.1 This test is a visual inspection of the sample to ensure that the weight stack travels freely along its guide means and returns to its initial position after the displacing force has been removed.

8.2.2 *Apparatus and Set Up*—The sample shall be set up as described in 7.1.

8.2.3 *Calibration*—No calibration required. Visual inspection only.

8.2.4 *Procedure*—Move the lifting arm through its range of travel and verify that the weight stack moves along a guide means in a controlled manner and returns to its initial position as the lifting arm is returned to its initial rest position.

8.2.5 *Pass/Fail Criteria*—The weight stack must begin and end the test in the same rest position and must not move unless it is displaced intentionally by a lifting force applied to the lifting arm.

8.2.6 *Precision and Bias*—No information is presented about either the precision or bias of test in 8.2 for evaluating weight stack travel since the test result is non-quantitative.

8.3 *Weight Stack Selector Pin Retention:*

8.3.1 This test is a visual and physical inspection of the weight stack selector pin to ensure that the design features a retention device and that it functions properly.

8.3.2 *Apparatus and Set Up*—The sample shall be set up as described in 7.1. Obtain instructions or a descriptive explanation of the function of the weight stack selector pin from the manufacturer.

8.3.3 *Calibration*—No calibration required. Visual and function inspection only.

8.3.4 *Procedure*—Inspect the weight stack selector pin and ensure that it features a retention device that will not allow the pin to be removed from the weight stack unless it is intentionally removed. Examples of retention devices include, but are not limited to, spring activated detent balls or a physical deformation of the pin and comparable retention zone on the weight plate. The operation of the retention system shall be self-evident. Insert the weight stack selector pin into a weight on the weight stack and verify that the retention mechanism functions properly.

8.3.5 *Pass/Fail Criteria*—Weight stack selector pins that do not have a retention means shall fail this test. Retention mechanisms that do not function according to the instructions provided by the manufacturer shall fail this test.

8.3.6 *Precision and Bias*—No information is presented about either the precision or bias of test in 8.3 for evaluating weight stack selector pin design and function since the test result is non-quantitative.

8.4 *Entrance/Exit from Machine:*

8.4.1 This test is a visual and physical inspection of the machine to determine whether or not an assist means is required and then ensure that the design functions properly.

8.4.2 *Apparatus and Set Up*—The sample shall be set up as described in 7.1. Reinstall the upholstered pads for this test. Obtain instructions or a descriptive explanation of the function of the assist mechanism(s) used on the sample from the manufacturer.

8.4.3 *Calibration*—No calibration required. Visual and function inspection only.

8.4.4 *Procedure*—Adjust the machine for the evaluator's size according to the manufacturer's instructions. The evaluator shall enter the machine and attempt to get into the exercise start position as described in the operation instructions provided by the manufacturer. The evaluator shall be able to get into and back out of the starting position with relative ease. If the lifting or user means cannot be reached by the evaluator or if the evaluator cannot get into the starting position easily, then further adjustment of the machine may be required. If this is not the case (the machine is properly adjusted per the operation instructions for the given body size of the evaluator), then an assist means that moves the lifting or user means into the direction of lifting stroke must be provided.

8.4.4.1 If an assist means is provided, then operate the mechanism and ensure that it performs as described in the operation instructions. Upon actuation of the assist means, the lifting or user means shall move into the direction of machine motion allowing the user to get into the loaded exercise start position. Upon completion of the exercise and return of the lifting or user means to the rest position, actuation of the assist means shall stop the lifting or user means prior to reaching the unloaded rest position, thereby allowing the user to exit from the loaded use position.