
**Industrial trucks — Verification of
stability —**

**Part 3:
Reach and straddle trucks**

Chariots de manutention — Vérification de la stabilité —

Partie 3: Chariots rétractables et à fourche entre longerons

iteh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 22915-3:2021

<https://standards.iteh.ai/catalog/standards/iso/4848dc7b-9682-4b4c-bf72-81bb15f30c64/iso-22915-3-2021>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 22915-3:2021

<https://standards.iteh.ai/catalog/standards/iso/4848dc7b-9682-4b4c-bf72-81bb15f30c64/iso-22915-3-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test conditions	1
4.1 General	1
4.2 Position of truck on tilt table	1
4.2.1 Load and drive/steer axles	1
4.2.2 Tests 1, 2, 6, 7 and 8	2
4.2.3 Tests 3, 4 and 5	2
4.3 Horizontal position of load datum point	3
4.4 Lift height for tests simulating travel	3
5 Verification of stability	4
Bibliography	9

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 22915-3:2021](https://standards.iteh.ai/catalog/standards/iso/4848dc7b-9682-4b4c-bf72-81bb15f30c64/iso-22915-3-2021)

<https://standards.iteh.ai/catalog/standards/iso/4848dc7b-9682-4b4c-bf72-81bb15f30c64/iso-22915-3-2021>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 2, *Safety of powered industrial trucks*.

This third edition cancels and replaces the second edition (ISO 22915-3:2014), which has been technically revised.

The main changes compared to the previous edition are as follows:

- [Clause 2](#) has been updated;
- the regional requirements for Australia have been changed (specific requirement deleted);
- the maximum tilt angle for test 8 has been deleted.

A list of all parts in the ISO 22915 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Industrial trucks — Verification of stability —

Part 3: Reach and straddle trucks

1 Scope

This document specifies the tests for verifying the stability of reach trucks (with retractable mast or fork arm carriage) and straddle trucks, equipped with tilting or non-tilting masts or fork arms and having a rated capacity up to and including 5 000 kg.

It is also applicable to such trucks operating under the same conditions when equipped with load-handling attachments.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5053-1, *Industrial trucks — Vocabulary — Part 1: Types of industrial trucks*

ISO 22915-1, *Industrial trucks — Verification of stability — Part 1: General*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5053-1 and ISO 22915-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Test conditions


4.1 General

See ISO 22915-1.

4.2 Position of truck on tilt table

4.2.1 Load and drive/steer axles

The load and drive/steer axles are shown in [Figure 1](#).

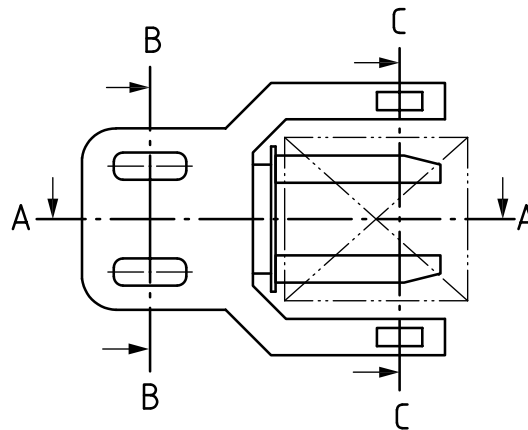

Key

- A-A longitudinal centre plane of truck
- B-B drive/steer axle
- C-C load axle

Figure 1 — Load and drive/steer axles

4.2.2 Tests 1, 2, 6, 7 and 8

The truck shall be positioned on the tilt table so that its drive/steer axle, B-B, and load axle, C-C, are parallel to the tilt axis, X-Y, of the tilt table (see [Table 1](#)).

4.2.3 Tests 3, 4 and 5

The truck shall be positioned on the tilt table with the line, M-N, parallel to the tilt axis, X-Y, of the tilt table (see [Table 1](#)).

Point M is defined as follows.

- a) For trucks with a single non-articulating drive (steer) wheel: point M shall be the vertical projection onto the tilt table of the point of intersection between the centreline of the drive/steer axle and the centreline of the drive wheel width.
- b) For trucks with a non-sprung castor wheel:
 - 1) for tests carried out on the castor wheel side of the truck, point M shall be the vertical projection onto the tilt table of the point of intersection between the centreline of the castor wheel axle and the midpoint between the castor wheel or the two castor wheels, with the non-sprung castor being positioned with the centreline of the castor wheel axle nearer to the centre plane of the truck;
 - 2) for tests carried out on the drive (steer) wheel side of the truck, point M shall be the vertical projection onto the tilt table of the point of intersection between the centreline of the drive/steer axle and the centreline of the drive wheel width.
- c) For trucks with a drive/steer axle in an articulating frame articulated in the centre plane of the truck: point M shall be the vertical projection onto the tilt table of the point of the intersection between the lateral axis of the articulating frame and the centre plane, A-A, of the truck.
- d) For trucks with a sprung castor wheel and a single non-sprung drive (steer) wheel: point M shall be the vertical projection onto the tilt table of the point of intersection between the centreline of the drive wheel axle and the centreline of the drive wheel width, with the axle of the drive wheel positioned at right angles to the tilt axis.