

---

**Akustika - Slabljenje zvoka pri širjenju na prostem - 2. del: Inženirska metoda za napovedovanje ravni zvočnega tlaka na prostem (ISO 9613-2:2024)**

Acoustics - Attenuation of sound during propagation outdoors - Part 2: Engineering method for the prediction of sound pressure levels outdoors (ISO 9613-2:2024)

Akustik - Dämpfung des Schalls bei der Ausbreitung - Teil 2: Verfahren der Genauigkeitsklasse 2 (Ingenieurverfahren) für die Vorhersage der Schalldruckpegel im Freien (ISO 9613-2:2024)

Acoustique - Atténuation du son lors de sa propagation à l'air libre - Partie 2: Méthode d'ingénierie pour la prédiction des niveaux de pression acoustique en extérieur (ISO 9613-2:2024)

<https://standards.iteh.ai/>

<https://standards.iteh.ai/en/standards/osist-pr-en-iso-9613-2-2024>

**Ta slovenski standard je istoveten z: prEN ISO 9613-2**

---

**ICS:**

17.140.01	Akustična merjenja in blaženje hrupa na splošno	Acoustic measurements and noise abatement in general
-----------	--	---

**oSIST prEN ISO 9613-2:2024****en,fr,de**





# International Standard

**ISO 9613-2**

## **Acoustics — Attenuation of sound during propagation outdoors —**

### **Part 2: Engineering method for the prediction of sound pressure levels outdoors**

*Acoustique — Atténuation du son lors de sa propagation à l'air  
libre —*

*Partie 2: Méthode d'ingénierie pour la prédiction des niveaux de  
pression acoustique en extérieur*

**Second edition  
2024-01**

## ISO 9613-2:2024(en)

# iTeh Standards (<https://standards.iteh.ai>) Document Preview

oSIST prEN ISO 9613-2:2024

<https://standards.iteh.ai/catalog/standards/sist/f23f614d-56a9-459e-85ad-68516d6356a4/osist-pren-iso-9613-2-2024>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

© ISO 2024 – All rights reserved

## ISO 9613-2:2024(en)

## Contents

Page

<b>Foreword</b>	<b>iv</b>
<b>Introduction</b>	<b>vi</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>2</b>
<b>3 Terms, definitions, symbols and units</b>	<b>2</b>
3.1 Terms and definitions	2
3.2 Symbols and units	3
<b>4 Source description</b>	<b>4</b>
<b>5 Meteorological conditions</b>	<b>6</b>
<b>6 Basic formulae</b>	<b>7</b>
<b>7 Calculation of the attenuation terms</b>	<b>8</b>
7.1 Geometric divergence, $A_{div}$	8
7.2 Atmospheric absorption, $A_{atm}$	9
7.3 Ground attenuation, $A_{gr}$	9
7.3.1 General method of calculation	9
7.3.2 Simplified method of calculation for A-weighted sound pressure levels	12
7.4 Screening, $A_{bar}$	13
7.4.1 General method of calculation	13
7.4.2 Alternative method to calculate the path length difference $z$ with one edge or with more parallel edges	17
7.4.3 Lateral diffraction around vertical edges	19
7.4.4 Combining vertical and lateral diffractions and limitations	20
7.5 Reflections	20
7.5.1 General	20
7.5.2 Single reflection at a flat surface – conditions and calculation	20
7.5.3 Multi-reflection up to higher orders	21
7.5.4 Reflections at cylindrical surfaces	22
<b>8 Meteorological correction, <math>C_{met}</math></b>	<b>23</b>
<b>9 Accuracy and limitations of the method</b>	<b>25</b>
<b>Annex A (informative) Additional types of attenuation, <math>A_{misc}</math></b>	<b>27</b>
<b>Annex B (informative) Directivity correction, <math>D_c</math>, for chimney stacks</b>	<b>34</b>
<b>Annex C (informative) Meteorological correction due to the dependency of <math>C_0</math> from the angular wind distribution</b>	<b>38</b>
<b>Annex D (informative) Calculation of sound pressure levels caused by wind turbines</b>	<b>42</b>
<b>Bibliography</b>	<b>45</b>

## ISO 9613-2:2024(en)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

This second edition cancels and replaces the first edition (ISO 9613-2:1996), which has been technically revised.

The main changes are as follows:

- subdivision of extended sources improved (more detailed to decrease uncertainty with software implementations);
- improved classification of the source-directivity;
- improved and more detail specified in the determination of the ground factor  $G$  (projection to horizontal plane);
- integration of a correction for  $A_{gr}$  to account for the decreasing ground effect for small values of distance/height – harmonizing the General method [7.3.1](#) and the Simplified method [7.3.2](#);
- modified definition of the mean height  $h_m$  for the application of the Simplified method [7.3.2](#);
- integration of the strategy to calculate screening as it was developed with ISO/TR 17534-3;
- modified specification of the barrier attenuation  $D_z$  and the correction for meteorological effects  $K_{met}$  to eliminate well known shortcomings with low barriers and large source-to-receiver distances;
- inclusion of clear specifications on how to combine vertical and lateral diffraction (from ISO/TR 17534-3);
- improved specification of the minimal extension (width or height) of a reflecting surface;
- multi-reflections up to higher orders (in accordance with ISO/TR 17534-3);
- reflections at vertical cylindrical surfaces;

**ISO 9613-2:2024(en)**

- additional to the simple method for the attenuation of foliage without any parameter dependencies of the old version ISO 9613-2:1996, A.2.2, a new and more detailed method including the influence of forestal parameters (see A.2.3);
- the directivity correction  $D_c$  for chimney stacks (see [Annex B](#));
- proposal for a meteorological correction derived from the local wind-climatology (see [Annex C](#));
- calculation of sound pressure levels caused by wind turbines (see [Annex D](#)).

A list of all parts in the ISO 9613 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[oSIST prEN ISO 9613-2:2024](#)

<https://standards.iteh.ai/catalog/standards/sist/f23f614d-56a9-459e-85ad-68516d6356a4/osist-pren-iso-9613-2-2024>

## ISO 9613-2:2024(en)

### Introduction

The ISO 1996 series<sup>[1][2][3]</sup> of standards specifies methods for the description of noise outdoors in community environments. Other standards specify methods for determining the sound power levels emitted by various noise sources, such as machinery and specified equipment (ISO 3740 series<sup>[4]</sup>), or industrial plants (ISO 8297<sup>[5]</sup>). This document is intended to bridge the gap between these two types of standards, to enable noise levels in the community to be predicted from sources of known sound emission. The method described in this document is general in the sense that it may be applied to a wide variety of noise sources and covers most of the major mechanisms of attenuation. There are, however, constraints on its use, which arise principally from the description of environmental noise in the ISO 1996 series.

This version includes the modifications developed for reasons of quality assurance if the method is implemented in software as described in ISO 17534-1<sup>[6]</sup> and ISO/TR 17534-3<sup>[7]</sup> and some improvements to make the applied strategy fit for broad software-based application.

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[oSIST prEN ISO 9613-2:2024](https://standards.iteh.ai/catalog/standards/sist/f23f614d-56a9-459e-85ad-68516d6356a4/osist-pren-iso-9613-2-2024)

<https://standards.iteh.ai/catalog/standards/sist/f23f614d-56a9-459e-85ad-68516d6356a4/osist-pren-iso-9613-2-2024>



# Acoustics — Attenuation of sound during propagation outdoors —

## Part 2: Engineering method for the prediction of sound pressure levels outdoors

### 1 Scope

This document specifies an engineering method for calculating the attenuation of sound during propagation outdoors in order to predict the levels of environmental noise at a distance from a variety of sources. The method predicts the equivalent continuous A-weighted sound pressure level (as described in ISO 1996-series) under meteorological conditions favourable to propagation from sources of known sound emission.

These conditions are for downwind propagation or, equivalently, propagation under a well-developed moderate ground-based temperature inversion, such as commonly occurs in clear, calm nights. Inversion conditions over extended water surfaces are not covered and may result in higher sound pressure levels than predicted from this document (see e.g. References [11] and [12]).

The method also predicts a long-term average A-weighted sound pressure level as specified in ISO 1996-1 and ISO 1996-2. The long-term average A-weighted sound pressure level encompasses levels for a wide variety of meteorological conditions.

Guidance has been provided to derive a meteorological correction based on the angular wind distribution relevant for the reference or long-term time interval as specified in ISO 1996-1:2016, 3.2.1 and 3.2.2. Examples for reference time intervals are day, night, or the hour of the night with the largest value of the sound pressure level. Long-term time intervals over which the sound of a series of reference time intervals is averaged or assessed representing a significant fraction of a year (e.g. 3 months, 6 months or 1 year).

The method specified in this document consists specifically of octave band algorithms (with nominal mid-band frequencies from 63 Hz to 8 kHz) for calculating the attenuation of sound which originates from a point sound source, or an assembly of point sources. The source (or sources) may be moving or stationary. Specific terms are provided in the algorithms for the following physical effects:

- geometrical divergence;
- atmospheric absorption;
- ground effect;
- reflection from surfaces;
- screening by obstacles.

Additional information concerning propagation through foliage, industrial sites and housing is given in [Annex A](#). The directivity of chimney-stacks to support the sound predictions for industrial sites has been included with [Annex B](#). An example how the far-distance meteorological correction  $C_0$  can be determined from the local wind-climatology is given in [Annex C](#). Experiences of the last decades how to predict the sound pressure levels caused by wind turbines is summarized in [Annex D](#).

The method is applicable in practice to a great variety of noise sources and environments. It is applicable, directly, or indirectly, to most situations concerning road or rail traffic, industrial noise sources, construction

## ISO 9613-2:2024(en)

activities, and many other ground-based noise sources. It does not apply to sound from aircraft in flight, or to blast waves from mining, military, or similar operations.

To apply the method of this document, several parameters need to be known with respect to the geometry of the source and of the environment, the ground surface characteristics, and the source strength in terms of octave band sound power levels for directions relevant to the propagation.

If only A-weighted sound power levels of the sources are known, the attenuation terms for 500 Hz may be used to estimate the resulting attenuation.

The accuracy of the method and the limitations to its use in practice are described in [Clause 9](#).

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9613-1:1993, *Acoustics — Attenuation of sound during propagation outdoors — Part 1: Calculation of the absorption of sound by the atmosphere*

## 3 Terms, definitions, symbols and units

### 3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

#### 3.1.1

#### A-weighted equivalent continuous sound pressure level

$L_{AT}$  sound pressure level defined by [Formula \(1\)](#):

$$L_{AT} = 10 \lg \left\{ \left[ \left( \frac{1}{T} \right) \int_0^T p_A^2(t) dt \right] / p_0^2 \right\} \text{ dB} \quad (1)$$

where

$p_A(t)$  is the instantaneous A-weighted sound pressure, expressed in pascals;

$p_0$  is the reference sound pressure ( $= 20 \times 10^{-6}$  Pa);

$T$  is a specified time interval, expressed in seconds

Note 1 to entry: The A-frequency weighting is that specified for sound level meters in IEC 61672-1[10].

Note 2 to entry: The time interval  $T$  should be long enough to average the effects of varying meteorological parameters. Two different situations are considered in this document, namely short-term downwind and long-term overall averages.

## ISO 9613-2:2024(en)

### 3.1.2

#### equivalent continuous downwind octave band sound pressure level

$L_{fT}$  (DW)

sound pressure level is given as follows:

$$L_{fT}(\text{DW}) = 10 \lg \left\{ \left[ \left( \frac{1}{T} \right) \int_0^T p_f^2(t) dt \right] / p_0^2 \right\} \text{ dB} \quad (2)$$

where  $p_f(t)$  is the instantaneous octave band sound pressure downwind, in pascals, and the subscript  $f$  represents a nominal mid-band frequency of an octave band filter

Note 1 to entry: The electrical characteristics of the octave band filters should comply at least with the class 2 requirements of IEC 61260-1 [8].

### 3.1.3

#### insertion loss (of a barrier)

difference between the sound pressure levels in decibels at a receiver in a specified position under two conditions:

- a) with the barrier removed; and
- b) with the barrier present (inserted);

and no other significant changes that affect the propagation of sound

Note 1 to entry: The insertion loss is expressed in decibels.

## 3.2 Symbols and units

Table 1 provides a summary of symbols and units.

Table 1 — Symbols and units

Symbol	Definition	Unit
$a$	component distance parallel to the barrier edge between source and receiver	m
$A$	octave band attenuation	dB
$A_{\text{atm}}$	attenuation due to atmospheric absorption	dB
$A_{\text{bar}}$	attenuation due to a barrier, including possible correction	dB
$A_{\text{div}}$	attenuation due to geometrical divergence	dB
$A_{\text{curv}}$	attenuation due to reflection at a cylindrical surface	dB
$A_{\text{gr}}$	attenuation due to the ground effect	dB
$A_{\text{m}}$	middle region	—
$A_{\text{misc}}$	attenuation due to miscellaneous other effects	dB
$C_{\text{met}}$	meteorological correction	dB
$C_0$	factor, which depends on local meteorological statistics for wind speed and direction, and temperature gradients	dB
$d_p$	distance from point source to receiver projected onto the ground plane (see Figure 3)	m
$d_{S,O}$	distance between source and point of reflection on the reflecting obstacle (see Figure 13)	m
$d_{O,R}$	distance between point of reflection on the reflecting obstacle and receiver (see Figure 13)	m
$D_c$	directivity correction	dB
$D_z$	barrier attenuation	dB
$D_{\text{wd}}$	apparent large-distance directivity	dB
$e$	distance between the first and last diffraction edge	m
$G$	ground factor	—

## ISO 9613-2:2024(en)


Table 1 (continued)

Symbol	Definition	Unit
$h_S$	height of point source above ground	m
$h_R$	height of receiver above ground	m
$h_m$	mean height of the propagation path above the ground	m
$k$	raster factor	—
$K_{geo}$	correction factor for geometry	—
$L_p$	sound pressure level	dB
$L_{AT}(DW)$	equivalent continuous A-weighted downwind sound pressure level	dB
$L_{AT}(LT)$	long-term average A-weighted sound pressure level	dB
$L_{fT}(DW)$	equivalent continuous downwind octave band sound pressure level at a receiver location	dB
$L_W$	sound power level	dB
$\alpha_{atm}$	atmospheric attenuation coefficient	dB/km
$\alpha$	absorption coefficient	—
$\beta$	angle of incidence	rad
$\beta_b$	angle of incidence projected to the horizontal plane	rad
$\beta_h$	angle of incidence projected to a vertical plane rectangular to the reflecting surface	rad
$\lambda$	wavelength of sound	m

#### 4 Source description

Formulae to be used are for the attenuation of sound from point sources.

Extended noise sources, therefore, such as road and rail traffic or an industrial site (which may include several installations or plants, together with traffic moving on the site) shall be broken down into small sections that can be replaced by a central point source as starting point for the calculation of sound propagation, see Figure 1. This subdivision shall be chosen in such a way that the propagation conditions from each point of a section to the receiver can be considered representative. If no acoustically opaque objects block the direct path between any point of a section and the receiver, the propagation conditions shall be considered representative if no extent of the section is larger than the distance of its centre from the receiver multiplied by the raster factor  $k$ . A well proven value for the factor  $k$  is 0,5.

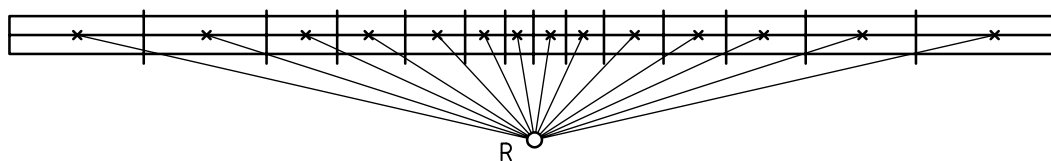


**Key**

R receiver

**Figure 1 — Principle of subdivision for a line source**

If buildings, barriers or other screening objects are located between the extended source and the receiver, the subdivision of the source is made in such a way that all points of a section are either screened or not screened. The subsections can be separated by lines connecting the receiver with the edges of all facades or with the two edges of each object forming the largest possible angle between them in 2D top view.

## ISO 9613-2:2024(en)

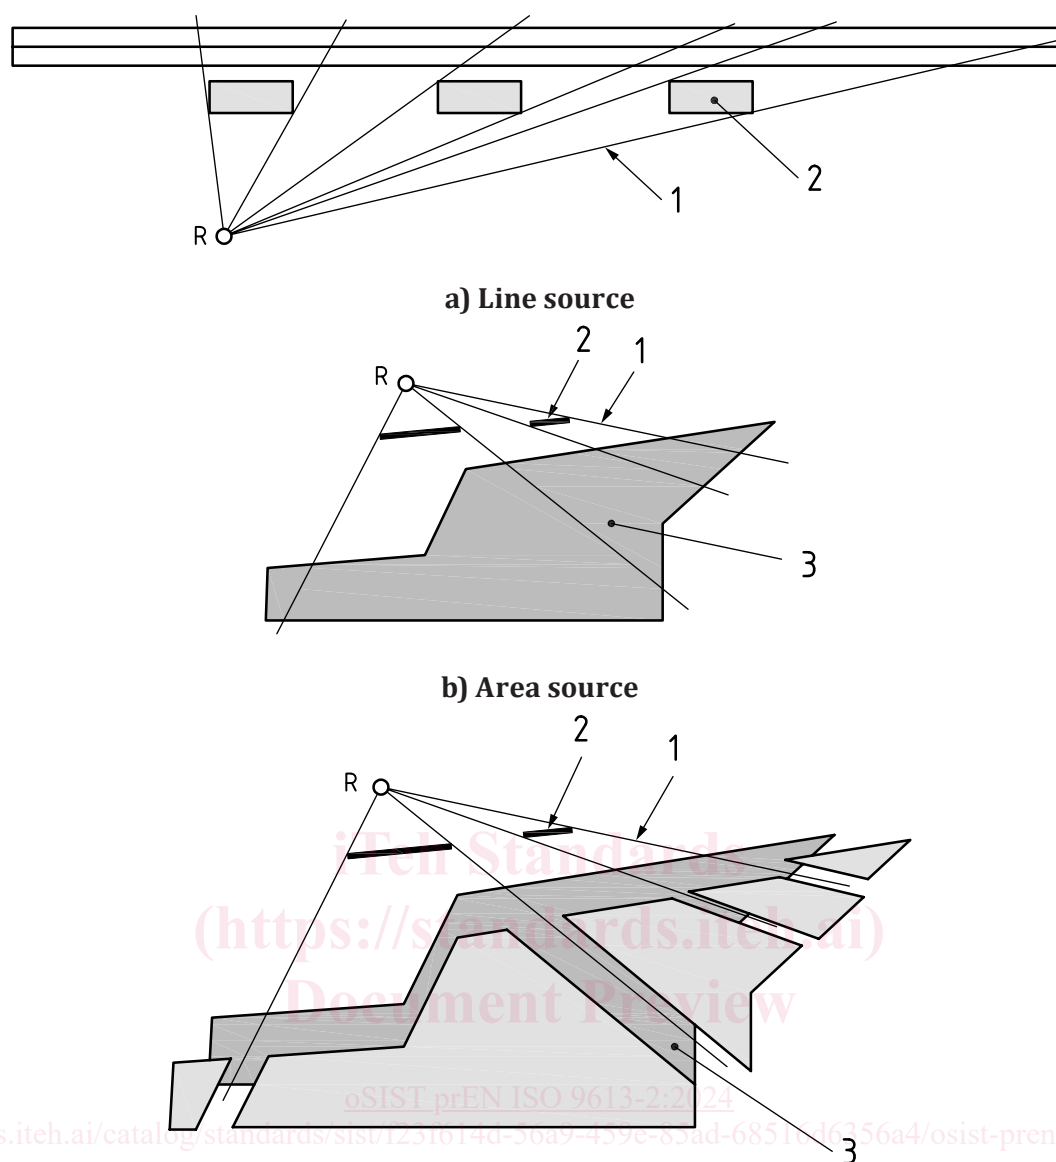

**c) Area source (dark grey), partitioned in 5 sub-parts (light grey)**

**Key**

- 1 projection lines
- 2 barriers
- 3 area source

**Figure 2 — Projection method for line source and area source**

The principle is shown with [Figure 2 a\)](#) for a line source and [Figures 2 b\)](#) and [2 c\)](#) for an area source. A further subdivision is made if a sloping edge of a screening object is only partially blocking the direct view. This subdivision caused by screening objects is called "projection method".

For line sources that are geometrically defined by successive polygon points the subdivision is performed in three steps:

- a) each polygon point is the edge point of one or two polygon elements;
- b) if the direct propagation path is blocked by a screening object, a further subdivision is carried out by applying the projection method;

## ISO 9613-2:2024(en)

- c) finally, these resulting parts are further subdivided according to the distance criterion applying the raster factor  $k$ .

Area sources are subdivided applying a similar strategy.

The area source is separated in convex shaped parts. These parts are subdivided further depending on the receiver position and all screening objects (walls, buildings, and other objects). This is carried out by cutting the subsections obtained in the first step by straight lines between receiver and edge-points of all screening objects (producing smaller subsections of second order). Then it is checked if the individual sources of each subsection meet the distance criterion. If not, they are subdivided further till the distance criterion is fulfilled.

Similar as with extended sources, a group of point sources may be described by an equivalent point sound source situated in the middle of the group, in particular if

- a) the sources have approximately the same strength and height above the local ground, and
- b) the same propagation conditions exist from the sources to the receiver, and
- c) no extent of the group of point sources is larger than the distance of its centre from the receiver multiplied by the raster factor  $k$ . A well proven value for the factor  $k$  is 0,5.

If the distance  $d$  is smaller (as expressed in c)) or if the propagation conditions for the component point sources are different (e.g. due to screening), the total sound source shall be divided into its component point sources.

**NOTE** In addition to the real sources described above, image sources will be introduced to describe the reflection of sound from walls and ceilings (but not by the ground) as described in 7.5. Images of extended sources are constructed taking into account the extension of all relevant reflectors between original source and receiver.

## 5 Meteorological conditions

Downwind propagation conditions for the method specified in this document are namely:

- wind direction within an angle of  $\pm 45^\circ$  of the direction connecting the centre of the dominant sound source and the centre of the specified receiver region, with the wind blowing from source to receiver, and
- wind speed between approximately 1 m/s and 5 m/s, measured at a height of 3 m to 11 m above the ground.

When applying this standard to wind turbines, higher wind speeds may be considered (see [Annex D](#)).

The formulae for calculating the equivalent continuous A-weighted downwind sound pressure level  $L_{AT}(DW)$  in this document, including the formulae for attenuation given in [Clause 7](#), are the average for meteorological conditions within these limits. The term average here means the average over a short time interval.

These formulae also hold, equivalently, for average propagation under a well-developed moderate ground-based temperature inversion, such as commonly occurs on clear, calm nights.

The long-term averaged A-weighted sound pressure level  $L_{AT}(LT)$  can be determined by applying the meteorological correction described in [Clause 8](#). It depends generally on the long-term variation of the angular distribution of the horizontal wind speed and the effective vertical sound speed gradient. Owing to this influence of the sound speed gradient the vertical gradients of the wind speed and the air temperature may be important and should generally be considered.