

~~2022-11-03~~
ISO/FDIS 22915-10:2022(E)
~~ISO TC 110/SC 2/WG 11~~
Secretariat: SIS
Industrial trucks — Verification of stability — Part 10: Additional stability test for trucks operating in the special condition of stacking with load laterally displaced by powered devices

- Style Definition: Footer
- Style Definition: Header
- Style Definition: List Bullet: Indent: Left: 0 cm, Hanging: 0.63 cm, No bullets or numbering, Tab stops: 0.63 cm, List tab
- Style Definition: List Bullet 2: Indent: Left: 0.5 cm, Hanging: 0.63 cm, No bullets or numbering, Tab stops: 1.13 cm, List tab
- Style Definition: List Bullet 3: Indent: Left: 1 cm, Hanging: 0.63 cm, No bullets or numbering, Tab stops: 1.63 cm, List tab
- Formatted: Font: Bold, German (Germany)
- Formatted: German (Germany)
- Formatted: Different first page header
- Formatted: Font: Bold, German (Germany)
- Formatted: German (Germany)
- Formatted: Font: Bold, German (Germany)
- Formatted: Space After: 12 pt, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers
- Formatted: German (Germany)
- Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22915-10
<https://standards.iteh.ai/catalog/standards/sist/6edad13d-2e11-4a02-a718-d5f69b535b69/iso-22915-10>

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

CP 401 • Ch. de Blandonnet 8

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Fax: +41 22 749 09 47

Email: copyright@iso.org

Website: www.iso.org

Published in Switzerland

Formatted: French (Switzerland)

Formatted: English (United Kingdom)

Formatted: Underline, German (Germany)

Formatted: English (United Kingdom)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22915-10

<https://standards.iteh.ai/catalog/standards/sist/6edad13d-2e11-4a02-a718-d5f69b535b69/iso-22915-10>

~~Edited DIS-~~
~~MUST BE USED~~
~~FOR FINAL~~
~~DRAFT~~

ii

© ISO 2022 – All rights reserved

ii

© ISO 2022 – All rights reserved

Information classification: Internal

Formatted: Font: 11 pt

Formatted: Line spacing: single

Contents

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
3.1 Special operating condition	2
4 Test conditions	3
4.1 General	3
4.2 Position of the truck on the tilt table	3
4.2.1 Counterbalanced trucks	3
4.2.2 Reach and straddle trucks	3
4.2.3 Pallet stackers	3
4.2.4 Bidirectional and multidirectional trucks	3
4.2.5 Industrial variable-reach trucks	4
4.2.6 Rough-terrain trucks with mast	4
4.2.7 Rough-terrain variable reach trucks	4
4.2.8 Counterbalanced trucks with articulated steering	4
4.2.9 Variable-reach container handler	4
4.2.10 Counterbalanced container handler	4
4.3 Position of the load	4
5 Verification of stability	4
5.1 General	4
5.2 Counterbalanced trucks	4
5.3 Reach and straddle trucks	4
5.4 Pallet stackers	4
5.5 Bidirectional and multidirectional trucks	4
5.6 Industrial variable-reach trucks	5
5.7 Rough-terrain trucks with mast	5
5.8 Rough-terrain variable reach trucks	5
5.9 Counterbalanced trucks with articulated steering	5
5.10 Variable-reach container handler	5
5.11 Counterbalanced container handler	5
Bibliography	6
Foreword	v
1 Scope	1
2 Normative references	2
3 Terms and definitions	2
4 Test conditions	4
4.1 General	4
4.2 Position of the truck on the tilt table	4
4.2.1 Counterbalanced trucks	4
4.2.2 Reach and straddle trucks	4

4.2.3 Pallet stackers 4

4.2.4 Bidirectional and multidirectional trucks 4

4.2.5 Industrial variable-reach trucks 4

4.2.6 Rough-terrain trucks with mast 4

4.2.7 Rough-terrain variable reach trucks 4

4.2.8 Counterbalanced trucks with articulated steering 4

4.2.9 Variable-reach container handler 4

4.2.10 Counterbalanced container handler 5

4.3 Position of the load 5

5 Verification of stability 5

5.1 General 5

5.2 Counterbalanced trucks 5

5.3 Reach and straddle trucks 5

5.4 Pallet stackers 5

5.5 Bidirectional and multidirectional trucks 5

5.6 Industrial variable-reach trucks 5

5.7 Rough-terrain trucks with mast 5

5.8 Rough-terrain variable reach trucks 5

5.9 Counterbalanced trucks with articulated steering 5

5.10 Variable-reach container handler 5

5.11 Counterbalanced container handler 6

6 Marking 6

Bibliography 7

ISO 22915-10
<https://standards.iteh.ai/catalog/standards/sist/6edad13d-2e11-4a02-a718-d5f69b535b69/iso-22915-10>

~~Edited DIS-~~
~~MUST BE USED~~
~~FOR FINAL~~
~~DRAFT~~

Formatted: Font: 11 pt

Formatted: Line spacing: single

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 2, *Safety of powered industrial trucks*.

This second edition cancels and replaces the first edition (ISO 22915-10:2008), which has been technically revised.

The main changes are as follows:

- The text references to "This part of ISO 22915" ~~was have been~~ replaced by "this document" in Clause 1;
- All cross-references to various figures and tests ~~within from other~~ parts of the ISO 22915 series have been dated;
- The duplicate entries listed in both Clause 2 and the Bibliography have been removed from the Bibliography;
- the text "or test 4" was deleted in clause 4.2.3;
- The text "per" in clause 4.3 has been modified ("per" replaced with "in accordance with");

© ISO 2022 – All rights reserved

© ISO 2022 – All rights reserved

Information classification: Internal

Formatted: Font: Italic

Formatted: std_publisher, English (United Kingdom)

Formatted: std_docNumber, English (United Kingdom)

Formatted: std_docPartNumber, English (United Kingdom)

Formatted: std_year, English (United Kingdom)

Formatted: List Continue 1, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers, Tab stops: 0.7 cm, Left + 1.4 cm, Left + 2.1 cm, Left + 2.8 cm, Left + 3.5 cm, Left + 4.2 cm, Left + 4.9 cm, Left + 5.6 cm, Left + 6.3 cm, Left + 7 cm, Left

Formatted: std_publisher

Formatted: std_docNumber

Formatted: std_publisher

Formatted: std_docNumber

Formatted: std_docPartNumber

Formatted: List Continue 1, No bullets or numbering, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers, Tab stops: 0.7 cm, Left + 1.4 cm, Left + 2.1 cm, Left + 2.8 cm, Left + 3.5 cm, Left + 4.2 cm, Left + 4.9 cm, Left + 5.6 cm, Left + 6.3 cm, Left + 7 cm, Left

Formatted: cite_sec

Formatted: cite_sec

Formatted: Font: 11 pt

Formatted: Line spacing: single

— ~~Key — in the key to Figure 1, key reference “A-A: longitudinal centre plane” has been added to figure 1 and also units (mm to the key) have been specified for “s” dimension “S”.~~

A list of all parts in the ISO-22915 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user’s national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Formatted: English (United Kingdom)

Formatted: std_publisher, English (United Kingdom)

Formatted: std_docNumber, English (United Kingdom)

Formatted: English (United Kingdom)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22915-10

<https://standards.iteh.ai/catalog/standards/sist/6edad13d-2e11-4a02-a718-d5f69b535b69/iso-22915-10>

~~Edited DIS~~
~~MUST BE USED~~
~~FOR FINAL~~
~~DRAFT~~

vi

© ISO 2022 – All rights reserved

vi

© ISO 2022 – All rights reserved

Information classification: Internal

Formatted: Font: 11 pt

Formatted: Line spacing: single

Industrial trucks — Verifications of stability — Part 10: Additional stability test for trucks operating in the special condition of stacking with load laterally displaced by powered devices

1 Scope

This document specifies an additional test for verifying the stability of a laden truck fitted with a powered load-handling device, such as a sideshift, which can displace the centre of gravity laterally to a substantial, predetermined extent from the longitudinal centre plane of the truck or from the centred position. Such devices are used in this mode for depositing and retrieving a load.

A displacement is considered to be a substantial displacement if it is more than:

- 100 mm, for a truck with a rated capacity < 5 000 kg;
- 150 mm, for a truck with a rated capacity $\geq 5\,000$ kg and $\leq 10\,000$ kg;
- 250 mm, for a truck with a rated capacity > 10 000 kg and < 20 000 kg;
- 350 mm, for a truck with a rated capacity $\geq 20\,000$ kg;

This document is applicable to the following types of trucks as defined in ISO 5053-1:

- a) counterbalanced trucks;
- b) reach and straddle trucks;
- c) pallet stackers;
- d) bidirectional and multidirectional trucks;
- e) industrial variable-reach trucks;
- f) rough-terrain trucks with mast;
- g) rough-terrain variable reach trucks;
- h) counterbalanced trucks with articulated steering;
- i) variable-reach container handler;
- j) counterbalanced container handler.

Formatted: Different first page header

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3691-1, *Industrial trucks — Safety requirements and verification — Part 1: Self-propelled industrial trucks, other than driverless trucks, variable-reach trucks and burden-carrier trucks*

ISO 5053-1, *Industrial trucks — Vocabulary — Part 1: Types of industrial trucks*

ISO 22915-1, *Industrial trucks — Verification of stability — Part 1: General*

ISO 22915-2:2018, *Industrial trucks — Verification of stability — Part 2: Counterbalanced trucks with mast*

ISO 22915-3:2021, *Industrial trucks — Verification of stability — Part 3: Reach and straddle trucks*

ISO 22915-4:2018, *Industrial trucks — Verification of stability — Part 4: Pallet stackers, double stackers and order-picking trucks with operator position elevating up to and including 1 200 mm lift height*

ISO 22915-7:2016, *Industrial trucks — Verification of stability — Part 7: Bidirectional and multidirectional trucks*

ISO 22915-9:2014, *Industrial trucks — Verification of stability — Part 9: Counterbalanced trucks with mast handling freight containers of 6 m (20 ft) length and longer*

ISO 22915-11:2011, *Industrial trucks — Verification of stability — Part 11: Industrial variable-reach trucks*

ISO 22915-12:2015, *Industrial trucks — Verification of stability — Part 12: Industrial variable-reach trucks handling freight containers of 6 m (20 ft) length and longer*

ISO 22915-13:2012, *Industrial trucks — Verification of stability — Part 13: Rough-terrain trucks with mast*

ISO 22915-14:2010, *Industrial trucks — Verification of stability — Part 14: Rough-terrain variable-reach trucks*

ISO 22915-15:2020, *Industrial trucks — Verification of stability — Part 15: Counterbalanced trucks with articulated steering*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 22915-1 and ISO 5053-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

Formatted: Line spacing: Exactly 12 pt

Formatted: Tab stops: Not at 0.76 cm

Formatted: RefNorm, Tab stops: 0.7 cm, Left + 1.4 cm, Left + 2.1 cm, Left + 2.8 cm, Left + 3.5 cm, Left + 4.2 cm, Left + 4.9 cm, Left + 5.6 cm, Left + 6.3 cm, Left + 7 cm, Left

Formatted: Tab stops: Not at 0.76 cm

Formatted: std_publisher

Formatted: std_docNumber

Formatted: std_docPartNumber

Formatted: Font: 11 pt

Formatted: Space Before: 0 pt, Line spacing: single

3.1 3.1**special operating condition**

stacking whereby loads are substantially displaced laterally from the longitudinal centre plane A-A, as defined in ISO 22915-1:2016, Figure 3, or from the centred position, by a powered device

Note 1 to entry: See Figure 1.

Formatted: TermNum, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers


Formatted: Definition, Line spacing: single, Don't keep with next

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Default Paragraph Font

Formatted: Note, Tab stops: 0.7 cm, Left + 1.4 cm, Left + 2.1 cm, Left + 2.8 cm, Left + 3.5 cm, Left + 4.2 cm, Left + 4.9 cm, Left + 5.6 cm, Left + 6.3 cm, Left + 7 cm, Left

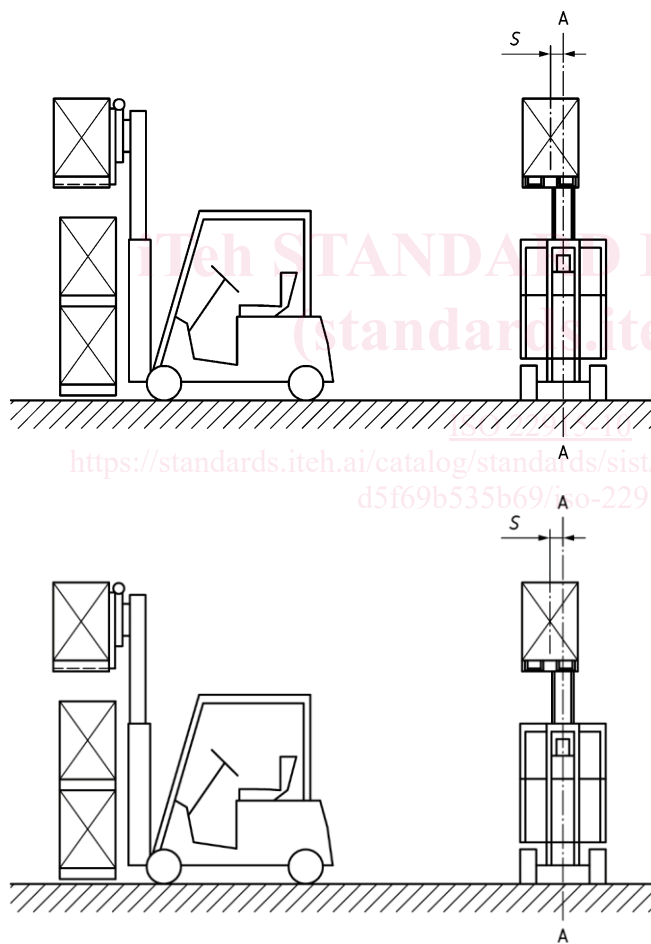

Key

A-A Longitudinal longitudinal centre plane
S substantial displacement in, mm

Figure 1 — Special operating condition

4 Test conditions

4.1 General

See ISO 22915-1.

4.2 Position of the truck on the tilt table

4.2.1 Counterbalanced trucks

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-2:2018.

4.2.2 Reach and straddle trucks

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-3:2021.

4.2.3 Pallet stackers

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-4:2019/2018.

4.2.4 Bidirectional and multidirectional trucks

The position of the truck on the tilt table shall be in accordance with test 8 of ISO 22195/22915-7:2016.

4.2.5 Industrial variable-reach trucks

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-11:2011.

4.2.6 Rough-terrain trucks with mast

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-13:2012.

4.2.7 Rough-terrain variable reach trucks

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-14:2011/2010.

4.2.8 Counterbalanced trucks with articulated steering

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-15:2020.

4.2.9 Variable-reach container handler

The position of the truck on the tilt table shall be in accordance with test 3 of ISO 22915-12:2015.

Formatted: Line spacing: Exactly 12 pt

Formatted: Don't keep with next

Formatted: Font: Not Italic

Formatted: Justified, Don't keep with next

Formatted: Justified, Don't keep with next

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Tab stops: Not at 0.76 cm

Formatted: Default Paragraph Font

Formatted: std_year

Formatted: Font: 11 pt

Formatted: Space Before: 0 pt, Line spacing: single