### FINAL DRAFT

## INTERNATIONAL STANDARD

ISO/FDIS 12167-2

ISO/TC 123/SC 8

Secretariat: JISC

Voting begins on: **2020-10-28** 

Voting terminates on: **2020-12-23** 

Plain bearings — Hydrostatic plain journal bearings with drainage grooves under steady-state conditions —

Part 2:

Characteristic values for the calculation of oil-lubricated plain stournal bearings with drainage grooves

Paliers lisses — Paliers lisses radiaux hydrostatiques avec rainures https://standards.iteh.ajeztalog/standards/sistian/and-cylenger-based stationnaire — 5788668766e/iso-idis-12167-2

Partie 2: Caractéristiques du calcul pour la lubrification des paliers lisses radiaux avec rainures d'écoulement

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 12167-2 https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-5798bc6876ee/iso-fdis-12167-2



#### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Con	tents	Page
Forev	vord	iv
Intro	duction	v
1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Characteristic values	1

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 12167-2 https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-5798bc6876ee/iso-fdis-12167-2

#### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see <a href="www.iso.org/directives">www.iso.org/directives</a>).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see <a href="https://www.iso.org/patents">www.iso.org/patents</a>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>. (Standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 8, *Calculation methods for plain bearings and their applications*:

https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-

This second edition cancels and replaces the first edition (ISO 12167-2:2001), which has been technically revised.

The main changes compared to the previous edition are as follows:

- adjustment to ISO/IEC Directives, Part 2:2018;
- correction of typographical errors.

A list of all parts in the ISO 12167 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at <a href="https://www.iso.org/members.html">www.iso.org/members.html</a>.

### Introduction

The results come from isothermal analysis and is just a first approach of the bearings behaviour and in no case the results can be opposed to those obtained present by and published in international documents based on modern theories.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 12167-2 https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-5798bc6876ee/iso-fdis-12167-2

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO/FDIS 12167-2</u>

https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-5798bc6876ee/iso-fdis-12167-2

### Plain bearings — Hydrostatic plain journal bearings with drainage grooves under steady-state conditions —

### Part 2:

### Characteristic values for the calculation of oil-lubricated plain journal bearings with drainage grooves

### 1 Scope

This document specifies, in graphic form, characteristic values used in the calculation of oil-lubricated plain journal bearings with drainage grooves.

#### Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12167-1, Plain bearings — Hydrostatic plain journal bearings with drainage grooves under steady-state conditions — Part 1: Calculation of oil-lubricated plain journal bearings with drainage grooves

#### ISO/FDIS 12167-2 3

Terms and definitions ISO/FDIS 12167-2 https://standards.iteh.ai/catalog/standards/sist/a639499a-c91d-47e0-b41e-

No terms and definitions are listed in this document: 12167-2

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <a href="https://www.iso.org/obp">https://www.iso.org/obp</a>
- IEC Electropedia: available at <a href="http://www.electropedia.org/">http://www.electropedia.org/</a>

### Characteristic values

See Table 1 and Figures 1 to 13.

The characteristic values given in this document shall be provided for the calculation of oil-lubricated hydrostatic plain journal bearings in accordance with ISO 12167-1. They are based on the premises and boundary conditions specified therein. The values required for the calculation can be determined from the diagrams. Explanations concerning the symbols and calculation examples are included in ISO 12167-1. When designing a plain bearing the characteristic values listed in Table 1 can be used for optimized bearings.

Table 1 — Characteristic values for optimized bearings
$\varepsilon$ = 0,4; $h_{\rm p}$ = 40 · $C_{\rm R}$ ; $\alpha$ = 0; $b_{\rm G}/D$ = 0,05; $P^*$ = 2; $l_{\rm ax}/B$ = 0,1; $\xi$ = 1

Z	B/D	l <sub>c</sub> /B	$l_{\rm c}/D$	K	β°	F*	$\pi_{\mathrm{f}}$	$P_{\mathrm{f}}^{*}$	$Q^*$	P * tot
4	1,00	0,10	0,100	1,416	23,41	0,285 9	1,288	1,531	5,080	10,349
4	0,75	0,12	0,090	0,855	20,64	0,290 9	1,557	1,478	5,375	11,867
6	1,00	0,10	0,100	2,409	16,80	0,270 5	1,299	1,829	6,169	11,954
6	0,75	0,10	0,075	1,642	16,08	0,2978	1,708	1,606	7,029	13,819
6	0,50	0,11	0,055	0,922	13,88	0,316 1	2,406	1,430	8,280	16,329
8	0,50	0,10	0,050	1,416	11,67	0,313 4	2,537	1,531	9,857	18,597
8	0,30	0,11	0,033	0,712	9,31	0,336 5	3,975	1,332	12,628	23,599
10	0,30	0,10	0,030	1,003	8,34	0,334 4	4,161	1,383	14,366	25,814

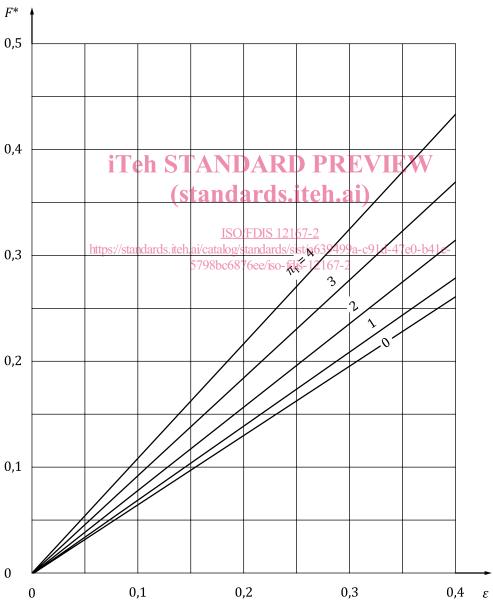


Figure 1 — Characteristic values of load-carrying capacity  $F^*$  as a function of the relative eccentricity  $\varepsilon$  for different relative frictional pressures  $\pi_f$  and Z = 4; B/D = 1;  $l_{ax}/B$  = 0,1;  $l_c/D$  = 0,1;  $b_G/D$  = 0,05;  $\xi$  = 1;  $\alpha$  = 0

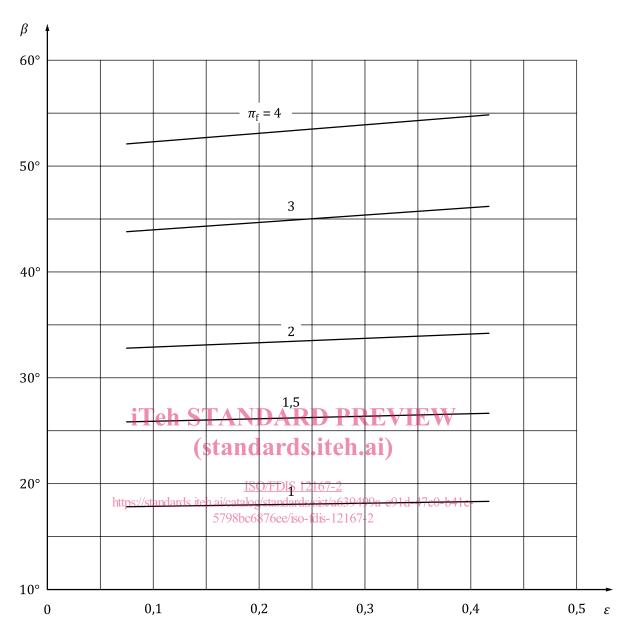


Figure 2 — Attitude angle  $\beta$  as a function of the relative eccentricity  $\varepsilon$  for different relative frictional pressures  $\pi_f$  and Z = 4; B/D = 1;  $l_{ax}/B$  = 0,1;  $l_c/D$  = 0,1;  $b_G/D$  = 0,05;  $\xi$  = 1;  $\alpha$  = 0