

# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 7507-2

ISO/TC 28/SC 2

Secretariat: BSI

Voting begins on:  
2021-03-16

Voting terminates on:  
2021-06-08

---

---

## Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks —

### Part 2: Optical-reference-line method or electro-optical distance-ranging method

*Pétrole et produits pétroliers liquides — Jaugeage des réservoirs cylindriques verticaux —  
Partie 2: Mesurage par ligne de référence optique ou mesurage électro-optique de la distance*

ICS: 75.180.30

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/DIS 7507-2](#)

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number  
ISO/DIS 7507-2:2021(E)

© ISO 2021

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/DIS 7507-2](https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2)  
<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Precautions</b> .....	<b>2</b>
<b>5 Equipment</b> .....	<b>2</b>
5.1 Equipment for tank strapping.....	2
5.2 Optical-reference-line method.....	2
5.3 Electro-Optical Distance-Ranging method.....	3
<b>6 Procedure</b> .....	<b>3</b>
6.1 Principle.....	3
6.2 Preparation of the tank.....	4
6.3 Reference circumference.....	4
6.4 Offset readings by optical reference line method.....	4
6.5 Offsets measured by Electro-optical Distance-Ranging method.....	9
6.5.1 EODR instrument set-up.....	9
6.5.2 EODR calibration procedure.....	9
6.6 Tank bottom calibration.....	11
6.7 Other measurements and data.....	11
<b>7 Tolerances</b> .....	<b>12</b>
<b>8 Tank capacity table calculation procedure</b> .....	<b>12</b>
8.1 Outside circumference.....	12
8.2 Corrections.....	13
8.3 Tank capacity table.....	14
<b>Annex A (informative) Tank calibration uncertainties for optical-reference-line method</b> .....	<b>15</b>
<b>Bibliography</b> .....	<b>29</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 28, *Petroleum products and lubricants*, Subcommittee SC 2, *Measurement of petroleum and related products*.

This document is a committee draft.

This third edition is intended to cancel and replace the second edition (ISO 7507-2:2005), which has been technically revised.

The main changes compared to the previous edition are as follows:

- Offsets between reference circumference and specified levels are measured by Electro-Optical Distance-Ranging method.

A list of all parts in the ISO 7507 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

This part of ISO 7507 forms part of a series on tank calibration, including the following:

ISO 4269:2001, *Petroleum and liquid petroleum products — Tank calibration by liquid measurement — Incremental method using volumetric meters*

ISO 7507-1:2003, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 1: Strapping method*

ISO 7507-3:2006, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 3: Optical-triangulation method*

ISO 7507-4:2010, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 4: Internal electro-optical distance-ranging method*

ISO 7507-5:2000, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 5: External electro-optical distance-ranging method*

ISO 8311:2013, *Refrigerated light hydrocarbon fluids — Calibration of membrane tanks and independent prismatic tanks in ships — Physical measurement*

ISO 12917-1:2017, *Petroleum and liquid petroleum products — Calibration of horizontal cylindrical tanks — Part 1: Manual methods*

ISO 12917-2: 2002, *Petroleum and liquid petroleum products — Calibration of horizontal cylindrical tanks — Part 2: Internal electro-optical distance-ranging method*

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO shall not be held responsible for identifying any or all such patent rights.

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/DIS 7507-2

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>

# Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks —

## Part 2: Optical-reference-line method or electro-optical distance-ranging method

### 1 Scope

This part of ISO 7507 specifies a method for the calibration of tanks above eight metres in diameter with cylindrical courses that are vertical. It provides a method for determining the volumetric quantity of the liquid contained within a tank at gauged liquid levels.

**NOTE** For optical-reference-line method, the optical (offset) measurements required to determine the circumferences can be taken internally or externally, provided that insulation is removed if tank is insulated.

The method specified in this part of ISO 7507 is suitable for tilted tanks with up to 3 % deviation from the vertical provided that a correction is applied for the measurement tilt, as described in ISO 7507-1.

This method is an alternative to other methods such as strapping (ISO 7507-1) and the optical-triangulation method (ISO 7507-3).

### 2 Normative references

ISO/DIS 7507-2

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533->

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4269:2001, *Petroleum and liquid petroleum products — Tank calibration by liquid measurement — Incremental method using volumetric meters*

ISO 7507-1:2003, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 1: Strapping method*

ISO 7507-4:2010, *Petroleum and liquid petroleum products — Calibration of vertical cylindrical tanks — Part 4: Internal electro-optical distance-ranging method*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 7507-1, ISO 7507-4 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

#### 3.1

##### optical-reference-line

vertical optical ray (virtual) that is established using the optical device at a given location

**3.2  
magnetic trolley**

mechanical device that can be traversed up or down the tank shell wall to measure deviations in the tank shell relative to the optical-reference-line using a horizontal scale that is mounted on the trolley

**3.3  
station**

location where the optical device and the magnetic trolley are placed for optical measurements

**3.4  
horizontal station**

station where the optical device is located as it is moved around the tank circumference

**3.5  
vertical station**

station where the magnetic trolley is located along the tank shell wall

**3.6  
reference circumference**

circumference measured at the bottom course that forms the basis for subsequent computations

**3.7  
reference offset**

distance of the shell wall (at each horizontal station) from the optical-reference-line measured at the bottom course where the reference circumference is measured

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

**4 Precautions**

The general precautions and safety precautions specified in ISO 7507-1 shall apply to this part of ISO 7507.

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>

**5 Equipment**

**5.1 Equipment for tank strapping**

Equipment as follow, specified in ISO 7507-1:

- strapping tapes;
- spring balance;
- step-over;
- littlejohn grip;
- dip-tape and dip-weight.

**5.2 Optical-reference-line method**

**5.2.1 Optical-reference-line device**, such as a precision optical plummet, a precision engineer's level with a pentaprism attachment, or a precision engineer's theodolite with a pentaprism attachment.

NOTE 1 These are optical instruments with a means of attachment to either a tripod, magnetic bracket or other stable means of support.

The instrument, when set on its support and levelled, either manually using bubble vials or automatically if an automatic levelling device is fitted, shall be capable of giving a vertical line of sight.



The instrument should preferably be of short focal length so that, when set up at a practical working height, it can be focused on the scale at the reference strapping level.

The instrument including digital device with laser beam element shall have a resolution of at least 1:20 000 and be equipped with a telescope with a magnification of not less than 20. The pentaprism attachment for use with an engineer's level or engineer's theodolite shall not introduce any significant collimation errors.

NOTE 2 Optical plummets can be fitted with a single optical train, i.e. a zenith plummet, a double optical train or a single superimposed optical train giving both upward and downward lines of sight, i.e. a nadir/zenith plummet. It is preferable that the plummet does not have any movable elements in its optical train, such as mirrors or pentaprisms, to ensure stability of the line of sight.

**5.2.2 Magnetic trolley**, of robust construction. Its design shall include the following features.

1. The magnet(s) shall be of sufficient power to ensure that the trolley does not lose contact with the tank shell in conditions of high wind or when ring joints have to be negotiated or when there are heavy layers of paint or scale.
2. The magnet(s) shall be adjustable for height so that the clearance between the magnet faces and the tank may be varied to suit the tank construction and condition.
3. Manual magnetic trolley shall have a cord or wire cable attached to enable it to be raised or lowered from the tank roof or via a pulley system, from ground level. Automatic magnetic trolley can be moved up and down by electronic motor built in and controlled by remote control.
4. A graduated scale or laser receiving element to indicate the actual offset measurement shall be attached securely to the trolley at its centreline. When the trolley is in its operational mode, the scale shall be either perpendicular to the tank shell or horizontal.
5. The scale shall be attached to the trolley as closely as possible to the centreline of an axis in order to reduce errors caused by deformations in the tank.

NOTE Trolleys that are not magnetic can be used to maintain contact with the tank shell.

**5.2.3 Graduated scale**, made of steel and marked in millimetre increments. The length of the scale shall be as short as is practicable and shall be determined by the distance at which the optical equipment can be set up from the tank side. The scale shall be calibrated to a resolution of 1 mm or better using standard methods and standard reference devices.

### 5.3 Electro-Optical Distance-Ranging method

Equipment is described in ISO 7507-4.

## 6 Procedure

### 6.1 Principle

This calibration method is based on the accurate measurement of a reference circumference using a calibrated measuring tape at one level on an accessible, non-obstructed course. Repeat measurements agreeing within specified tolerances are made to avoid any systematic error in the derived circumferences. The derived circumferences are calculated from the measured reference circumference, and measurements of offsets taken at the specified levels and at the reference circumference. These offsets are a measure of the deviation of the tank wall. They are measured at a specified number of vertical stations, spaced equally around the tank.

NOTE For examples see [Figures 1 to 3](#).

## 6.2 Preparation of the tank

For new tanks or for tanks after repair, fill the tank to its normal working capacity with water or liquid intended to be filled during normal operation at least once and allow it to stand for at least 24 h prior to calibration.

If the tank is calibrated with liquid in it, record the depth, temperature and density of the liquid at the time of calibration. Do not make transfers of liquid during the calibration.

For floating-roof tanks where offset measurements may be taken internally, the roof shall be in its lowest position, resting on the legs.

## 6.3 Reference circumference

Reference circumference has a direct impact on the calibrated volume of entire tank. It, therefore, shall be measured as accurately as possible.

Determine the reference circumference using the reference method described in ISO 7507-1 and the following.

- a) Take multiple measurements of the reference circumference either prior to the commencement or after the completion of the optical readings. If the first three consecutive measurements agree within the tolerances specified in [Clause 7](#), take their mean average as the reference circumference and their standard deviation as the standard uncertainty. If they do not agree within the tolerances specified in [Clause 7](#), repeat the measurements until two standard deviations of the mean of all measurements is less than the half of the tolerances specified in [Clause 7](#). Use the mean as the measured reference circumference and the standard deviation as the standard uncertainty. Use standard procedures to eliminate obvious outliers.
- b) Take the measurement of the reference circumference at a position where work conditions allow reliable measurements, and which is within the focal range of the optical instrument. Strap the tank, aiming at one of the following levels:
  - 1) 1/4 of the course height above the lower horizontal seam,
  - 2) 1/4 of the course height below the upper horizontal seam;

and repeat the measurement to achieve measurements agreeing within the tolerances specified in [Clause 7](#).

## 6.4 Offset readings by optical reference line method

**6.4.1** Set up the optical-reference-line device ([5.2](#)), magnetic trolley ([5.3](#)) and graduated scale ([5.4](#)) successively at the horizontal stations (see [6.4.2](#)) that are equally spaced around the tank, as close as possible to the tank wall. Reference lines shall be chosen such that the trolley does not run over a vertical seam or its weld.

6.4.2 The minimum number of horizontal stations shall be as given in [Table 1](#).

**Table 1 — Minimum number of horizontal stations**

Circumference m	Minimum number of horizontal stations
≤ 50	10
> 50, ≤ 100	12
> 100, ≤ 150	16
> 150, ≤ 200	20
> 200, ≤ 250	24
> 250, ≤ 300	30
> 300	36

NOTE 1 The number of horizontal stations divided by the number of plates in tank segments should not be equal to an integer (e.g. 1, 2, 3, etc.) in order to avoid systematic errors.


NOTE 2 Using the minimum number of horizontal stations, especially for smaller tanks, can lead to larger-than-acceptable uncertainties.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/DIS 7507-2](#)

<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-f3591c94677b/iso-dis-7507-2>


Dimensions in millimetres

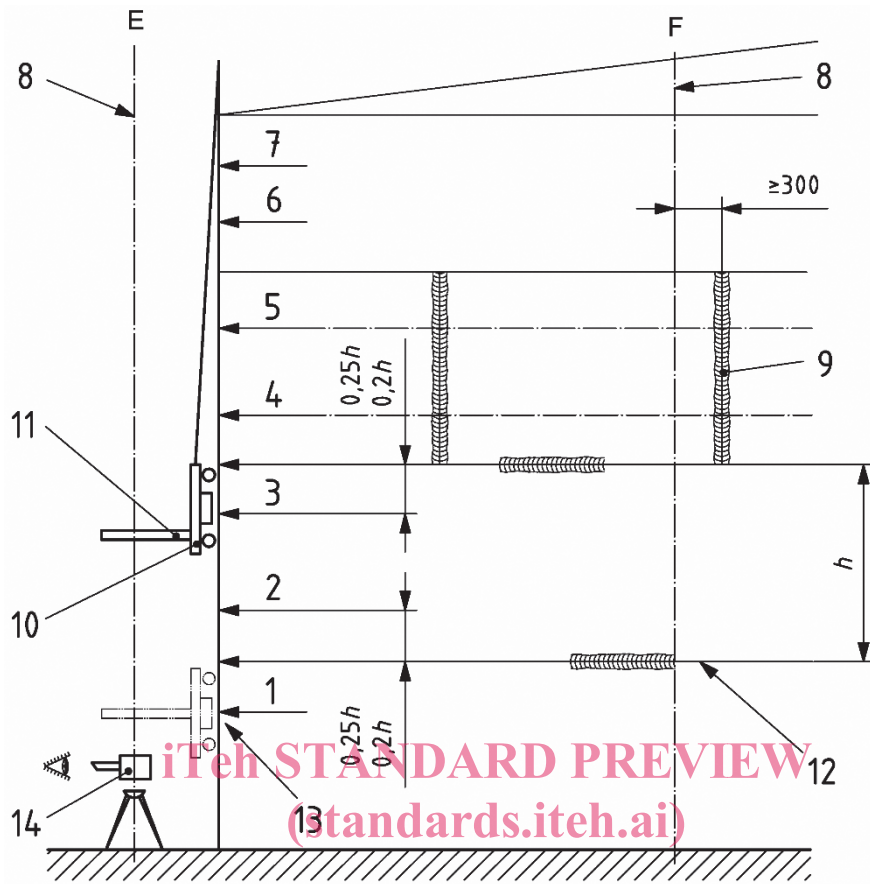

ISO/DIS 7507-2  
<https://standards.iteh.ai/catalog/standards/sist/573dbc16-e25e-42c7-9533-b3591c94677b/iso-dis-7507-2>  
 a) Tank elevation

**Key**

- |        |                        |    |   |
|--------|------------------------|----|---|
| 1 to 7 | horizontal levels      | 11 | graduated scale                                   |
| 8      | optical-reference-line | 12 | weld seam (horizontal)                            |
| 9      | weld seam (vertical)   | 13 | reference circumference taken close to location 1 |
| 10     | magnetic trolley       | 14 | optical equipment                                 |

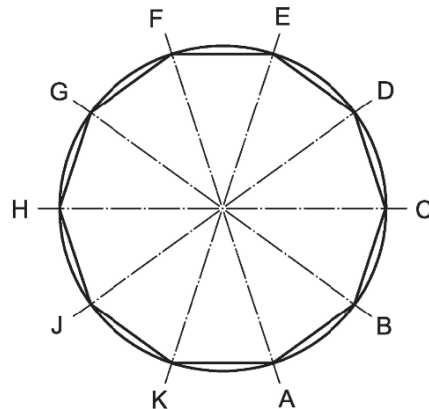

**b) Plan of horizontal stations**

NOTE The horizontal stations are designated A to K in the plan view (see also 6.4.2). Of these, only E and F are shown in the elevation.

**Figure 1 — Optical measurement of offsets from tank wall (typical case)**