

ISO/TR 5255-2:2022-2023(E)*

ISO TC 204

Date: 2022-11-912*

Intelligent transport systems — Low-speed automated driving system (LSADS) service — Part 2: Gap analysis

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TR 5255-2:2023

<https://standards.iteh.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a511-191b19/iso-tr-5255-2-2023>

Style Definition: Normal: Font: (Asian) Japanese, Space After: 12 pt, Tab stops: Not at 0.71 cm

Style Definition: Heading 1: Indent: Left: 0 cm, First line: 0 cm, Space After: 12 pt, Line spacing: Exactly 13.5 pt, Tab stops: Not at 0.76 cm

Style Definition: Heading 2: Font: Bold, Space After: 12 pt, Line spacing: Exactly 12.5 pt, Tab stops: Not at 0.63 cm

Style Definition: Heading 3: Font: Bold, Space After: 12 pt, Line spacing: Exactly 11.5 pt

Style Definition: Heading 4: Font: Bold, Space After: 12 pt, Line spacing: Exactly 11.5 pt, Tab stops: 1.66 cm, Left + Not at 1.8 cm

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition: Formula: Font:

Style Definition ...

Style Definition ...

Style Definition: Normal (Web): (Asian) Japanese

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition ...

Style Definition: List Continue 1

Formatted: Font: 11 pt

Formatted: zzCover, Left

Formatted: Different first page header

Formatted: Font: 11 pt

Formatted: Font: 11 pt, Not Bold

Formatted: zzCover, Left, Space After: 0 pt

Formatted: Font: 11 pt

Formatted: zzCover, Line spacing: single

Formatted: Font: 11 pt, Not Bold

ISO/TR 5255-2:20222023(E)

© ISO, 20222023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

CP 401 • Ch. de Blandonnet 8

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Email: copyright@iso.org

Website: www.iso.orgwww.iso.org

Published in Switzerland

Formatted: Font color: Blue

Formatted: Justified, Border: Box: (Single solid line, Blue, 0.5 pt Line width)

Formatted: std_publisher, Font color: Blue

Formatted: Font color: Blue

Formatted: Font color: Blue

Formatted: Font: 11 pt, Font color: Blue

Formatted: Font: 11 pt, Font color: Blue, English (United Kingdom)

Formatted: Font: 11 pt, Font color: Blue, English (United Kingdom)

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TR 5255-2:2023](https://standards.iteh.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a5fb-bd53f05d4b19/iso-tr-5255-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a5fb-bd53f05d4b19/iso-tr-5255-2-2023>

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

ii © ISO 2022 – All rights reserved

ii © ISO 2023 – All rights reserved

Contents

Foreword.....iv

Introduction.....v

1 Scope1

2 Normative references1

3 Terms and definitions1

4 Safety support function of LSAD system service1

4.1 General overview1

4.2 LSADS cyber security protection2

4.3 LSADS safety environment using AI2

4.4 Fail safe2

4.5 Safety design standards2

4.6 Safety operational concept using AI3

4.7 AI education on safety function3

4.8 Education sharing among AIs3

5 Supplemental safety support function of LSAD system service4

5.1 General4

5.2 Role of humans4

6 Connected vehicle environment4

6.1 Latency4

6.2 Network slicing5

Annex A (informative) Use cases where in-vehicle AI needs supplemental support for safety LSAD system service fleet operation6

A.1 Use case16

A.2 Use case26

A.3 Use case37

A.4 Use case47

A.5 Use case58

A.6 Use case68

Bibliography10

Foreword.....v

Introduction.....vi

1 Scope1

2 Normative references1

3 Terms and definitions1

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

ISO/TR 5255-2:20222023(E)

4 Safety support function of LSADS service 2
4.1 General overview 2
4.2 LSADS cyber security protection 2
4.3 LSADS safety environment using AI 3
4.4 Fail safe 3
4.5 Safety design standards 3
4.6 Safety operational concept using AI 3
4.7 AI education on safety function 4
4.8 Education sharing among AIs 5
5 Supplemental safety support function of LSAD system service 5
5.1 General 5
5.2 Role of humans 6
6 Connected vehicle environment 6
6.1 Latency 6
6.2 Network slicing 7
Annex A (informative) Use cases where in-vehicle AI needs supplemental support for
safety LSADS service fleet operation 8
Bibliography 15

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TR 5255-2:2023

<https://standards.iteh.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a5fb-bd53f05d4b19/iso-tr-5255-2-2023>

Formatted: Font: 11 pt
Formatted: Space After: 0 pt, Line spacing: single

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

A list of all parts in the ISO 5255 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Standardization of service role and functional model is necessary for the introduction of low-speed automated driving systems (LSADS) to support safe and efficient mobility used as a means of moving people, goods, and services in urban and rural areas.

ISO 22737 and ISO 7856 describe vehicle driving supports and do not cover the requirements of service role and functional model covering infrastructure facilities. Many business use cases regarding low-speed automated driving system (LSADS) services are currently emerging and many more variations are coming to be deployed. Various role and functional model presentation methodologies are used currently in use and there is therefore a need for a common understandable role and functional model presentation baseline standard.

ISO/TRS 5255-1 defines a common LSAD system service role and functional model presentation guidelines. Future emerging business cases can refer this document to ISO/TS 5255-1 as a baseline document which does not hinder the development of future business cases, but instead assists them.

This document focuses on safety operation gap analysis and serves as a baseline document describing what supplemental roles need be considered to take a safe operation lead in addition to the roles described in ISO/TS 5255-1. The purpose of this document is to assist in the introduction of LSADS, including infrastructure facilities to support mobility in urban and rural areas.

iTech STANDARD PREVIEW
(standards.itech.ai)

ISO/TR 5255-2:2023

<https://standards.itech.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a5fb-bd53f05d4b19/iso-tr-5255-2-2023>

Intelligent transport systems — Low-speed automated driving system (LSADS) service — Part 2: Gap analysis

1 Scope

This document:

- examines and analyses the safety environment for low-speed automated driving services (LSADS);
- describes the safety role supplement to the functional model described in ISO/TS 5255-1;
- describes the supplemental safety points for LSADS;
- describes role for the functional model of service applications for LSADS.

This document can contribute to the development of future automated driving system service safety requirement use cases, other than the one described in ISO/TS 5255-1.

This document is applicable to services using LSADS-equipped vehicles only.

In-vehicle control system is not in scope of this document.

·

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 14812, *Intelligent transport systems — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/TS 14812 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1 artificial intelligence AI

Formatted: Different first page header

Formatted: zzSTDTitle, Line spacing: single, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: Font: Not Bold

Formatted: Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: List Continue 1, No bullets or numbering, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers, Tab stops: 0.7 cm, Left + 1.4 cm, Left + 2.1 cm, Left + 2.8 cm, Left + 3.5 cm, Left + 4.2 cm, Left + 4.9 cm, Left + 5.6 cm, Left + 6.3 cm, Left + 7 cm, Left

Formatted: std_publisher

Formatted: std_documentType

Formatted: std_docNumber

Formatted: std_docPartNumber

Formatted

Formatted: std_publisher

Formatted: std_documentType

Formatted: std_docNumber

Formatted: std_docPartNumber

Formatted

Formatted: std_publisher

Formatted

Formatted: std_documentType

Formatted: std_docNumber

Formatted: std_docTitle, Font: Not Italic

Formatted

Formatted: std_publisher

Formatted: std_documentType

Formatted: std_docNumber

Formatted: English (United Kingdom)

Formatted

Formatted: English (United Kingdom)

Formatted

Formatted: English (United Kingdom)

Formatted: Font: Cambria, English (United Kingdom)

Formatted

ISO/TR 5255-2:2023(E)

Formatted: Space After: 36 pt, Line spacing: Exactly 12 pt

<system> capability to acquire, process, create and apply knowledge, held in the form of a model, to conduct one or more given tasks

Formatted: Font: 12 pt

[SOURCE: ISO/IEC TR 24030:2021, 3.1]

4 Safety support function of ~~LSAD system~~ LSADS service

4.1 General overview

The LSADS design safety is maintained through conformance to the requirements of related standards, such as UL4600, ISO 26262 series and ISO/~~PAS~~ 21448.

4.2 LSADS cyber security protection

As described in ISO/TS 5255-1, the security credential management system is a valuable tool for cyber security issues. The LSADS vehicle needs to have such a system for safety operations. ISO/TS 21177:~~2019~~ provides specifications for a set of ITS station security services required to ensure the authenticity of the source and integrity of information exchanged between trusted entities, such as:

— devices operated as bounded secured managed entities, i.e. "ITS Station Communication Units" (ITS-SCU) and "ITS station units" (ITS-SU) specified in ISO 21217; and

— ITS-SUs (composed of one or several ITS-SCUs) and external trusted entities such as sensor and control networks.

ISO/TR 5255-2:2023

<https://standards.iteh.ai/catalog/standards/sist/03ddaed9-edd8-4ac6-a5fb-bd53f05d4b19/iso->

These services include authentication and secure session establishment which are required to exchange information in a trusted and secure manner.

These services are essential for many ITS applications and services, including time-critical safety applications, automated driving, remote management of ITS stations (ISO 24102-2), and roadside/infrastructure related services.

For the LSADS vehicle, the ISO/SAE 21434 specifies engineering requirements for cybersecurity risk management regarding the concept, product development, production, operation, maintenance and decommissioning of electrical and electronic (E/E) systems in road vehicles, including their components and interfaces.

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

2 © ISO #### All rights reserved

2 © ISO 2023 – All rights reserved

Formatted: Right, Space After: 36 pt, Line spacing: Exactly 12 pt

Formatted: Font: 12 pt

4.3 LSADS safety environment using AI

The LSAD (Low-speed automated driving) fleet safe operation function is maintained by using support from vehicle internal safety driving AI (Artificial intelligence) which (AI). This provides safe LSAD automated driving function and back-office (LSAD system service control centre) AI which remotely provides an overridden AI service function superseding the LSAD vehicle AI function when the vehicle AI requests supplemental support from back-office AI. Figure 1 shows the safety operation AI functions framework. For the decision making by back-office AI, supplement infrastructure sensor data is necessary. Each vehicle's internal AI also therefore sends a huge amount of data to back-office AI for the same reason.

4.4 Fail safe

The LSAD entire service system (including infrastructure support facilities) is to be expected as generally designed based upon a fail-safe concept and even, Even when back-office AI overrides vehicle the vehicle's internal AI, the vehicle's internal AI is to be expected to be designed to operate as per this concept. When re-starting an LSAD vehicle after the occurrence of an unexperienced situation occurring, resuming operation of the entire LSAD service system is expected to be generally designed to re-start the service at minimum manoeuvring speed (whilst being able to be prepared for sudden unexpected service interruptions which means meaning service stoppage). All the safety sensor data from the entire LSAD service system and other smart city infrastructure sensors are also expected to be generally designed to be used by the entire AI families of the LSAD system for safety-service-provisioning decision making.

4.5 Safety design standards


-The ISO 26262 series and UL 4600 contain requirements for achieving the safest operation of the entire LSAD service LSADS system.- As always, safety first is important concept, and it gains top priority.

4.6 Safety operational concept using AI

Figure_1 shows the image of LSAD service LSADS system safety operational concept.

The back-office AI contributes safety operational support for the entire LSAD fleet. For the decision making by back-office AI, the supplemental infrastructure sensor data are used. Vehicle internal AI for LSAD usually takes control of safety operations and receives support from back-office AI when needed. See Annex_A for use cases.

The AI learns safety operation decision making by consuming rich safety operation driving data. AI does not have the thinking ability to make decisions without external support. Therefore, when AI encounters a newly experiencing new situation experience, it needs external support from matured AI or other decision-making ability role entities.

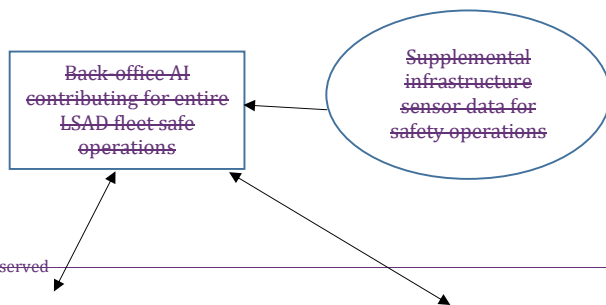

© ISO #### - All rights reserved


© ISO 2023 - All rights reserved

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Space After: 36 pt, Line spacing: Exactly 12 pt

Formatted: Font: 12 pt

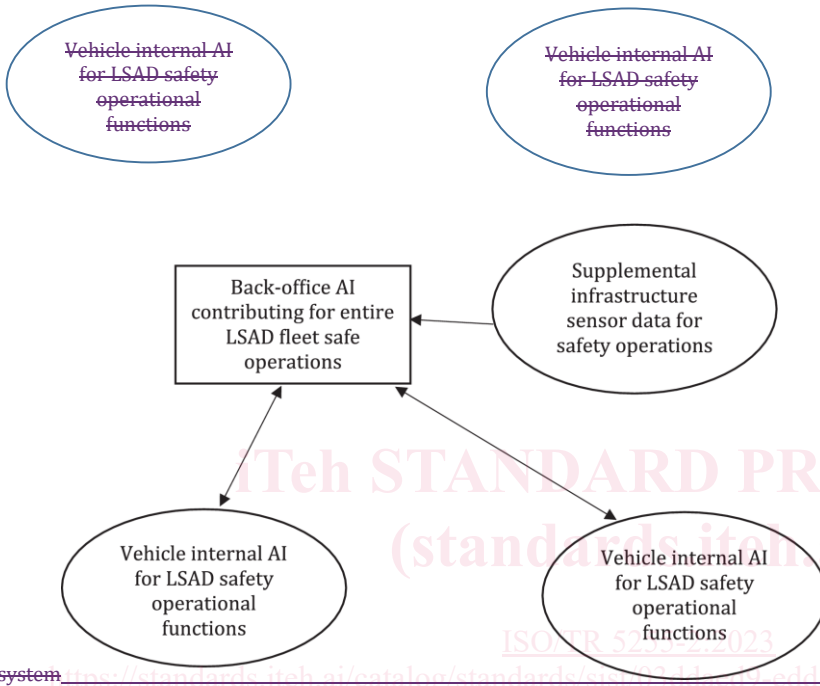

LSAD system

Figure 1 — Figure 1 — LSADS safety operational framework using AI functions

4.7 AI education on safety function

AI is expected to be designed to be educated constantly by rich and properly structured big data provided by smart city infrastructure sensors and real time automated driving records. But pre-matured AI sometimes need supplemental support from matured AI. In this manner, pre-matured AI is expected to be able to become more matured AI. For this reason, AI supporting automated driving need experiences to meet new situations where first first-hand safety decision making is taking place, so the necessary, proper and correct decision making becomes possible.

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Right, Space After: 36 pt, Line spacing: Exactly 12 pt

Formatted: Font: 12 pt


4.8 Education sharing among AIs

Education provided by back-office AI to one vehicle AI is expected to be shared by all other vehicle AIs so that entire LASD service system fleet vehicle AIs are kept on similar and/or same matured levels.

5 Supplemental safety support function of LSAD system service

5.1 General

It has been understood in recent years that the most appropriate teacher for educating premature AI to matured level is the human brain. A safety support hierarchy model employing this human-on-top concept is expected to be the most reasonable solution. Figure-2 describes this concept.

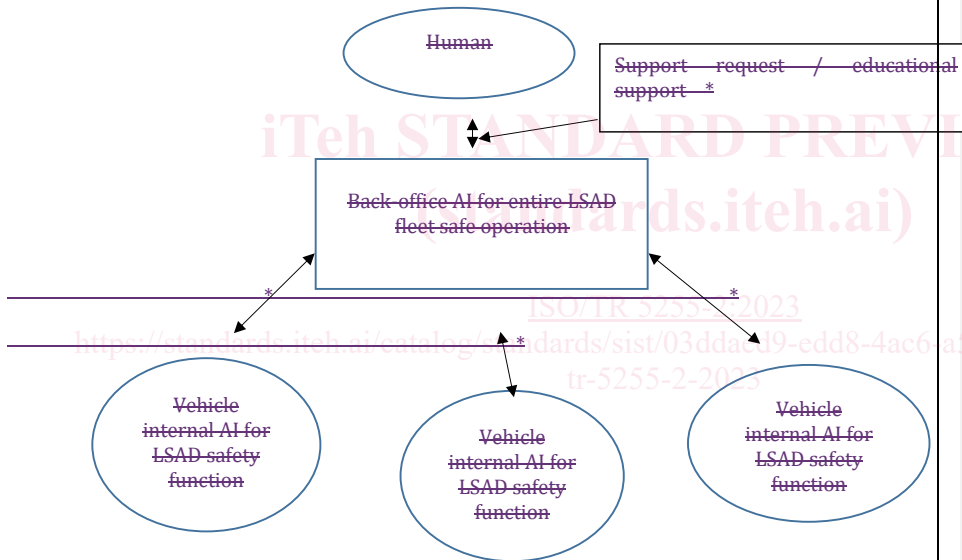

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single