

ISO/FDIS 5257:2023(E)

ISO/TC 165

Secretariat: SCC

Date: 2023-07-27~~xx~~

Bamboo ~~Structures~~structures — Engineered bamboo products — Test methods for determination of mechanical properties using small size specimens

~~Structures en bambou – Produits en bambou reconstitués – Méthodes d'essai pour la détermination des propriétés mécaniques à partir d'éprouvettes de petites tailles~~

Style Definition: Heading 1: Indent: Left: 0 pt, First line: 0 pt, Tab stops: Not at 21.6 pt

Style Definition: Heading 2: Font: Bold, Tab stops: Not at 18 pt

Style Definition: Heading 3: Font: Bold

Style Definition: Heading 4: Font: Bold

Style Definition: Heading 5: Font: Bold

Style Definition: Heading 6: Font: Bold

Style Definition: ANNEX

Style Definition: AMEND Terms Heading: Font: Bold

Style Definition: AMEND Heading 1 Unnumbered: Font: Bold

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 5257

<https://standards.iteh.ai/catalog/standards/sist/5c74f016-9352-4424-bf5b-2c756ae0b1a0/iso-fdis-5257>

ISO/FDIS 5257:2023(E)

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

CP 401 • Ch. de Blandonnet 8

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Fax: +41 22 749 09 47

Email: copyright@iso.org

Website: www.iso.org

Published in Switzerland

Formatted: Pattern: Clear

Formatted: Pattern: Clear

ITeH STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 5257

<https://standards.iteh.ai/catalog/standards/sist/5c74f016-9352-4424-bf5b-2c756ae0b1a0/iso-fdis-5257>

Contents Page

Foreword.....	iii
Introduction.....	iv
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Symbols.....	2
5 Reference population.....	4
6 Sampling.....	4
7 Conditioning of test specimens.....	5
8 Test conditions.....	5
9 Density and moisture content.....	5
9.1 Density.....	5
9.2 Moisture content.....	5
10 Measurement of mechanical properties.....	6
10.1 Tensile properties parallel to fiber.....	6
10.1.1 Preparation of test specimens.....	6
10.1.2 Test procedure.....	7
10.1.3 Expression of results.....	7
10.2 Compressive properties parallel to fiber.....	8
10.2.1 Preparation of test specimens.....	8
10.2.2 Test procedure.....	8
10.2.3 Expression of results.....	8
10.3 Shear strength and modulus.....	9
10.3.1 Preparation of test specimens.....	9
10.3.2 Test procedure.....	10
10.3.3 Expression of results.....	10
10.4 Tension properties perpendicular to fiber.....	11
10.4.1 Preparation of test specimens.....	11
10.4.2 Test procedures.....	11
10.4.3 Expression of results.....	12
10.5 Compression properties perpendicular to fiber.....	12
10.5.1 Preparation of test specimens.....	12
10.5.2 Test procedure.....	13
10.5.3 Expression of results.....	13
11 Test report.....	13
Foreword.....	iii
Introduction.....	iv
1 Scope.....	1
2 Normative references.....	1

ISO/FDIS 5257:2023(E)

3	Terms and definitions	1
4	Symbols	3
5	Reference population	4
6	Sampling	4
7	Conditioning of test specimens	5
8	Test conditions	5
9	Density and moisture content	5
9.1	Density	5
9.2	Moisture content	5
10	Measurement of mechanical properties	6
10.1	Tensile properties parallel-to-fibre	6
10.1.1	Preparation of test specimens	6
10.1.2	Test procedure	7
10.1.3	Expression of results	7
10.2	Compressive properties parallel-to-fibre	8
10.2.1	Preparation of test specimens	8
10.2.2	Test procedure	8
10.2.3	Expression of results	8
10.3	Shear strength and modulus	9
10.3.1	Preparation of test specimens	9
10.3.2	Test procedure	10
10.3.3	Expression of results	10
10.4	Tension properties perpendicular-to-fibre	11
10.4.1	Preparation of test specimens	11
10.4.2	Test procedures	11
10.4.3	Expression of results	12
10.5	Compression properties perpendicular-to-fibre	12
10.5.1	Preparation of test specimens	12
10.5.2	Test procedure	13
10.5.3	Expression of results	13
11	Test report	13
Annex (informative)		15
Bibliography		18
		18

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Formatted: Adjust space between Latin and Asian text,
Adjust space between Asian text and numbers

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

Formatted: English (United States)

This document was prepared by Technical Committee ISO/TC 165, *Timber structures*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO/FDIS 5257:2023(E)

Introduction

Engineered bamboo products are processed bamboo-based composites designed for structural applications, including bamboo scrimber and glued laminated bamboo. For each type of engineered bamboo product, it is necessary to measure mechanical properties. This document is intended to provide manufacturers, regulatory agencies, and end-users with a means to evaluate the mechanical properties of engineered bamboo products intended for structural applications using small size specimens.

This document is an internationally-agreed reference standard for the measurement of mechanical properties of engineered bamboo products as defined in Clauses 3.1 and 3.2. Other standards related to the measurement of material properties may be deemed to comply with this document, provided that the adjustments necessary to establish equivalency between this and other standards are applied appropriately.

Formatted: Pattern: Clear

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 5257

<https://standards.iteh.ai/catalog/standards/sist/5c74f016-9352-4424-bf5b-2c756ae0b1a0/iso-fdis-5257>

Bamboo Structures – Engineered bamboo products – Test methods for determination of mechanical properties using small size specimens

1 Scope

This document specifies test methods, using small size specimens, suitable for determining the following mechanical properties of engineered bamboo products: tensile strength parallel-to-fiber; tensile modulus parallel-to-fiber; compressive strength parallel-to-fiber; tensile strength perpendicular-to-fiber; tensile modulus perpendicular-to-fiber; compressive strength perpendicular-to-fiber; compressive modulus perpendicular-to-fiber; shear strength parallel-to-fiber and shear modulus parallel-to-fiber.

NOTE This document provides an alternative test method to ISO 23478.

This document specifies test procedures for currently manufactured products as defined in 3.1 and 3.2 to evaluate material properties. The methods specified in this document are applicable to small size test specimens. The methods required to determine characteristic values, design values, or allowable values of the mechanical properties for a population are out of the scope of this document. Materials that do not conform to the definitions of bamboo scrimber or glued-laminated bamboo are beyond the scope of this specification.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~ISO 23478, Bamboo structures — Engineered bamboo products — Test methods for determination of physical and mechanical properties~~

~~ASTM D2915, Sampling and data-analysis for structural wood and wood-based products~~

3 Terms and definitions

For the purpose of this document, the following terms and definitions apply.

3.1

bamboo scrimber

panel or lumber made of compressed bamboo fiber bundle strips or compressed bamboo fiber bundle sheet which has three mutually perpendicular axes

Note 1 to entry: The three axes are shown in Figure 1.

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear


Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

ISO/FDIS 5257:2023(E)


Note 2 to entry: Bamboo scrimber can be approximately deemed as orthotropic material; hence it has two mutually orthogonal minor axes in the plane perpendicular to major axis. Unless otherwise stated, the properties of two minor axes can be ideally considered have same properties because the differences between them are trivial for structural use.

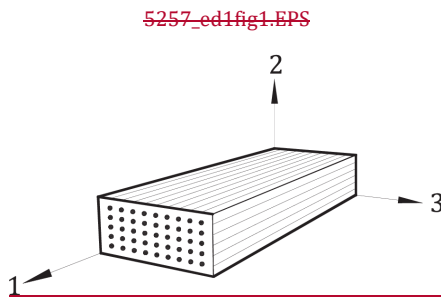

Key

- 1 along the direction of the bamboo ~~fibers~~fibres
- 2, 3 two mutually orthogonal directions in a plane that is perpendicular to axis-1

Figure 1 — Example of bamboo scrimber

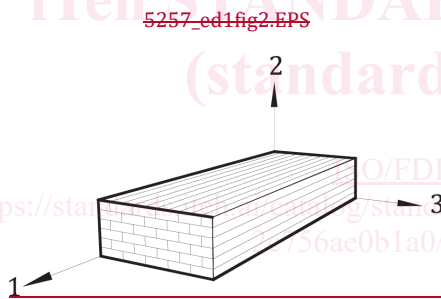

Key

- 1 along the direction of the bamboo ~~fibers~~fibres
- 2, 3 two mutually orthogonal directions in a plane that is perpendicular to axis-1

Figure 2 — Example of glued laminated bamboo

3.2 glued laminated bamboo

structural member formed by bonding together bamboo strips with their fibre orientation essentially parallel which has three mutually perpendicular axes

Note 1 to entry: The three axes are shown in Figure 2.

3.3 grade

population of engineered bamboo products with defined design properties

4 Symbols

A_c	area of the cross section of the compressive specimen, in mm ²
b	width of critical section located at the reduced cross section, in mm
d_1	coupon width between notches of the V-notched rail shear test specimen, in mm
E_0	modulus of elasticity parallel to the <u>fiber/fibre</u> , in N/mm ²
$E_{c,0}$	modulus of elasticity in compression parallel to the <u>fiber/fibre</u> , in N/mm ²
$E_{t,0}$	modulus of elasticity in tension parallel to the <u>fiber/fibre</u> , in N/mm ²
$E_{t,90}$	modulus of elasticity in tension perpendicular to the <u>fiber/fibre</u> , in N/mm ²
F	load, in N
$F_{c,0,u}$	compressive load parallel to the <u>fiber/fibre</u> at failure, in N
$F_{c,90,u}$	compressive load perpendicular to the <u>fiber/fibre</u> at failure, in N
$F_{s,u}$	shear load at failure, in N
$F_{t,0,u}$	tensile load parallel to the <u>fiber/fibre</u> at failure, in N
$F_{t,90,u}$	tensile load perpendicular to the <u>fiber/fibre</u> at failure, in N
$f_{c,0}$	compressive strength parallel to the <u>fiber/fibre</u> , in N/mm ²
$f_{s,0}$	shear strength parallel to the <u>fiber/fibre</u> , in N/mm ²
$f_{t,0}$	tensile strength parallel to the <u>fiber/fibre</u> , in N/mm ²
$f_{t,90}$	tensile strength perpendicular to the <u>fiber/fibre</u> , in N/mm ²
$f_{s,90}$	shear strength perpendicular to the <u>fiber/fibre</u> , in N/mm ²
G	shear modulus, in N/mm ²
G_0	shear modulus parallel to the <u>fiber/fibre</u> , in N/mm ²
G_{90}	shear modulus perpendicular to the <u>fiber/fibre</u> , in N/mm ²
h	overall coupon thickness of the V-notched rail shear test specimen, in mm
t	thickness of critical section located at the reduced cross section, in mm
$\Delta F_{c,0}$	incremental compressive load parallel to the <u>fiber/fibre</u> , in N
$\Delta F_{t,0}$	incremental tensile load parallel to the <u>fiber/fibre</u> , in N
$\Delta F_{t,90}$	incremental tensile load perpendicular to the <u>fiber/fibre</u> , in N
$\Delta F_{s,0}$	incremental shear load parallel to the <u>fiber/fibre</u> , in N
$\Delta F_{s,90}$	incremental shear load perpendicular to the <u>fiber/fibre</u> , in N

ISO/FDIS 5257:2023(E)

$\Delta\sigma$	incremental stress, in MPa
$\Delta\sigma_{c,0}$	$\Delta\sigma_{c,0} = \Delta F_{c,0} / bt$, incremental compressive stress parallel to the fiber/fibre , in MPa
$\Delta\sigma_{t,0}$	$\Delta\sigma_{t,0} = \Delta F_{t,0} / bt$, incremental tensile stress parallel to the fiber/fibre , in MPa
$\Delta\sigma_{t,90}$	$\Delta\sigma_{t,90} = \Delta F_{t,90} / bt$, incremental tensile stress perpendicular to the fiber/fibre , in MPa
$\Delta\varepsilon$	incremental strain
$\Delta\varepsilon_{c,0}$	incremental compressive strain parallel to the fiber/fibre
$\Delta\varepsilon_{t,0}$	incremental tensile strain parallel to the fiber/fibre
$\Delta\varepsilon_{t,90}$	incremental tensile strain perpendicular to the fiber/fibre
$\Delta\varepsilon_{+45}$	incremental strain over a gauge length at +45 direction
$\Delta\varepsilon_{-45}$	incremental strain over a gauge length at -45 direction

5 Reference population

The population from which the test sample was obtained shall be fully described. The description shall reference all of the attributes that may affect evaluated properties or restrict constituent materials to the grouping. The description shall include but is not limited to:

- species or species grouping, population boundary;
- age of the bamboo feedstock when harvested;
- designation of the product;
- size or size range of the product;
- moisture condition of the product;
- preservative treatment of the product;
- period in which the product was manufactured.

The reference population shall be a grouping from which a representative sample can be drawn to test specimens to characterize the required properties.

6 Sampling

The sampling shall be appropriate to the purpose of the testing and the nature of the reference population. The sampling method shall be documented. The documentation shall include details of the steps taken to ensure that each of the variants listed in the population as described in [Clause 5](#) is included in the representative sample.

Unless otherwise stated, test specimens shall be selected from random locations within a piece of engineered bamboo product. Specimens cut from pre-defined locations (center of a piece of engineered bamboo product, or a randomly selected end within a piece or a section free of defects or imperfections) may be deemed to comply with this requirement provided this does not produce any bias in measured properties.

ISO/FDIS 5257:2023(E)

Each test specimen for a given size, grade or property shall be cut from a different piece of engineered bamboo product and more than one type of test specimen may be cut from each piece. Sampling of the test materials shall be done in accordance with applicable sections on Statistical Methodology of ASTM-D2915.

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Materials with larger assumed or assigned population coefficients of variation, C_V , of the tested properties should have a larger sample size. It is possible to use the expected confidence limit to estimate the sample size based on the expected reduction of the characteristic property calculated from the test data.

7 Conditioning of test specimens

Test specimens shall be conditioned to an equilibrium moisture content resulting from a temperature of (23 ± 3) °C and relative humidity of (65 ± 5) %. A test piece is considered to be conditioned when it attains constant mass. Constant mass is deemed to have been attained when the results of two successive weighings, carried out at intervals of not less than 6 h, do not differ by more than 1 %.

8 Test conditions

Unless otherwise specified in the description of the reference population, the reference moisture content at the time of testing shall be consistent with conditioning at a temperature of 23 °C (± 3 °C) and 65 % (± 5 %) relative humidity.

At the time of testing, the moisture content, the temperature, and the time-to-failure of the specimen shall be recorded.

If tests results are to be used in the same environmental conditions in which testing took place, or if the laboratory is unable to follow the standard, storage, conditioning and testing under ambient temperature and relative humidity is permitted. The values of the temperature (± 3 °C) and the relative humidity (± 5 %) for the laboratory shall be recorded in the test report in addition to the moisture content determined for individual specimens.

9 Density and moisture content

9.1 Density

Measurement of density of a test specimen shall be in accordance with the method specified in ISO-23478.

Formatted: Pattern: Clear

Formatted: Pattern: Clear

9.2 Moisture content

Measurement of moisture content of a test specimen shall be in accordance with the method specified in ISO 23478.

Formatted: Pattern: Clear

Formatted: Pattern: Clear

10 Measurement of mechanical properties

Mechanical properties shall be determined via tests by using small size specimens. Table 1 lists the mechanical properties covered by this standard.

Formatted: Pattern: Clear

Table 1 — Mechanical properties covered by this document

Tensile strength parallel-to-fiber/fibre	5257_ed1figTab1_01.EPS	10.1
--	------------------------	------

Formatted: Pattern: Clear