
Trdni matriksi v okolju - Določanje polikloriranih bifenilov (PCB) s plinsko kromatografijo z masno selektivnim detektorjem (GC-MS) ali s plinsko kromatografijo z detektorjem z zajetjem elektronov (GC-ECD) (ISO 18475:2023)

Environmental solid matrices - Determination of polychlorinated biphenyls (PCB) by gas chromatography - mass selective detection (GC-MS) or electron-capture detection (GC-ECD) (ISO 18475:2023)

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

Ta slovenski standard je istoveten z: prEN ISO 18475

[oSIST prEN ISO 18475:2025](https://standards.iteh.ai/catalog/standards/sist/24c6eceb-4114-447f-ae1b-db226686c720/osist-pr-en-iso-18475-2025)

<https://standards.iteh.ai/catalog/standards/sist/24c6eceb-4114-447f-ae1b-db226686c720/osist-pr-en-iso-18475-2025>

ICS:

13.030.10	Trdni odpadki	Solid wastes
13.080.10	Kemijske značilnosti tal	Chemical characteristics of soils
71.040.50	Fizikalnokemijske analitske metode	Physicochemical methods of analysis

oSIST prEN ISO 18475:2025

en,fr,de

INTERNATIONAL STANDARD

**ISO
18475**

First edition
2023-10

**Environmental solid matrices —
Determination of polychlorinated
biphenyls (PCB) by gas
chromatography - mass selective
detection (GC-MS) or electron-capture
detection (GC-ECD)**

iTeh Standards

(<https://standards.iteh.ai>)

Document Preview

[oSIST prEN ISO 18475:2025](https://standards.iteh.ai/catalog/standards/sist/24c6eceb-4114-447f-ae1b-db226686c720/osist-pren-iso-18475-2025)

<https://standards.iteh.ai/catalog/standards/sist/24c6eceb-4114-447f-ae1b-db226686c720/osist-pren-iso-18475-2025>



Reference number
ISO 18475:2023(E)

© ISO 2023

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

oSIST prEN ISO 18475:2025

<https://standards.iteh.ai/catalog/standards/sist/24c6cecb-4114-447f-ae1b-db226686c720/osist-pren-iso-18475-2025>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Principle	3
5 Interferences	4
5.1 Interference with sampling and extraction	4
5.2 Interference with GC	4
6 Safety remarks	5
7 Reagents	5
7.1 General	5
7.2 Reagents for extraction	5
7.3 Reagents for clean-up	5
7.3.1 Clean-up A using aluminium oxide	5
7.3.2 Clean-up B using silica gel 60 for column chromatography	6
7.3.3 Clean-up C using gel permeation chromatography (GPC)	6
7.3.4 Clean-up D using Florisil®	6
7.3.5 Clean-up E using silica H ₂ SO ₄ /silica NaOH	7
7.3.6 Clean-up F using benzenesulfonic acid/sulfuric acid	7
7.3.7 Clean-up G using TBA sulfite reagent	7
7.3.8 Clean-up H using pyrogenic copper	7
7.3.9 Clean-up I using silica/silver nitrate	8
7.4 Gas chromatographic analysis	8
7.5 Standards	9
7.5.1 General	9
7.5.2 Calibration standards	9
7.5.3 Internal and injection standards	9
7.6 Preparation of standard solutions	10
7.6.1 Preparation of calibration standard solutions of PCBs	10
7.6.2 Preparation of internal standard solution	11
7.6.3 Preparation of injection standard solution	11
8 Apparatus	11
8.1 Extraction and clean-up procedures	11
8.2 Gas chromatograph	12
9 Sample storage and preservation	12
9.1 Sample storage	12
9.2 Sample pre-treatment	13
10 Procedure	13
10.1 Blank test	13
10.2 Extraction	13
10.2.1 General	13
10.2.2 Extraction procedure 1: Samples using acetone/petroleum ether or hexane-like solvent and agitation or sonication	14
10.2.3 Extraction procedure 2: Samples using Soxhlet or pressurized liquid extraction	15
10.2.4 Extraction procedure 3: Samples using acetone/petroleum ether or hexane-like solvent/sodium chloride and agitation	15
10.3 Concentration	16
10.4 Clean-up of the extract	16

ISO 18475:2023(E)

10.4.1	General.....	16
10.4.2	Clean-up A – Aluminium oxide.....	17
10.4.3	Clean-up B – Silica gel.....	17
10.4.4	Clean-up C – Gel permeation chromatography.....	17
10.4.5	Clean-up D – Florisil®.....	18
10.4.6	Clean-up E – Silica H ₂ SO ₄ /silica NaOH.....	18
10.4.7	Clean-up F – Benzenesulfonic acid/sulfuric acid.....	18
10.4.8	Clean-up G – TBA sulfite reagent.....	19
10.4.9	Clean-up H – Clean-up using pyrogenic copper to remove elemental sulfur and some other organic sulfur compounds.....	19
10.4.10	Clean up I – AgNO ₃ /silica.....	19
10.5	Addition of the injection standard.....	19
10.6	Gas chromatographic analysis (GC).....	19
10.6.1	General.....	19
10.6.2	Setting the gas chromatograph.....	19
10.7	Mass spectrometry (MS).....	20
10.7.1	Mass spectrometric conditions.....	20
10.7.2	Calibration of the method using an internal standard.....	20
10.7.3	Measurement.....	21
10.7.4	Identification.....	22
10.7.5	Check on method performance.....	22
10.7.6	Calculation.....	23
10.8	Electron capture detection (ECD).....	24
10.8.1	General.....	24
10.8.2	ECD conditions.....	24
10.8.3	Calibration of the method using internal standards.....	24
10.8.4	Measurement.....	24
10.8.5	Identification.....	24
10.8.6	Check on ECD method performance.....	24
10.8.7	Calculation.....	25
11	Performance characteristics.....	25
12	Precision.....	25
13	Test report.....	26
Annex A (informative)	Repeatability and reproducibility data.....	27
Annex B (informative)	Examples for gas chromatographic conditions and retention times of PCBs.....	32
Annex C (informative)	Calculation method for the estimation of total PCB content.....	33
Bibliography.....		40

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by the European Committee for Standardization (CEN) (as EN 17322:2020) and was adopted, without modification other than those given below, by Technical Committee ISO/TC 190, *Soil quality*, Subcommittee SC 3, *Chemical and physical characterization*.

- change of EN ISO 5667-15 reference to ISO 5667-15 reference;
- change of EN ISO 16720 reference to ISO 16720 reference;
- change of EN ISO 22892 reference to ISO 22892 reference;
- change of EN ISO 5667-13 reference to ISO 5667-13 reference;
- change of EN ISO 6468 reference to ISO 6468 reference;
- uniform spelling of sulfate and sulfite;
- editorially revised.

This first edition cancels and replaces ISO 10382:2002 and ISO 13876:2013, which have been technically revised.

The main changes are as follows:

- deletion of OCP analysis (this document specifies methods for quantitative determination of polychlorinated biphenyls);
- addition of GC-MS as a detection method;
- extension of the scope to sludge, sediment, treated biowaste and waste;

ISO 18475:2023(E)

- addition of modern extraction techniques and commonly used methods with optimized extraction time, proven clean-up methods and state of the art quantification methods;
- update of normative references.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

oSIST prEN ISO 18475:2025

<https://standards.itih.ai/catalog/standards/sist/24c6eceb-4114-447f-ae1b-db226686c720/osist-pren-iso-18475-2025>

Introduction

Polychlorinated biphenyls (PCB) have been widely used as additives in industrial applications where chemical stability has been required. This stability on the other hand creates environmental problems when PCB are eventually released into the environment. Since some of these PCB compounds are highly toxic, their presence in the environment (air, water, soil, sediment and waste) is regularly monitored and controlled. At present determination of PCB is carried out in these matrices in most of the routine laboratories following the preceding steps for sampling, pre-treatment, extraction and clean-up, by measurement of specific PCB by means of gas chromatography in combination with mass spectrometric detection (GC-MS) or gas chromatography with electron capture detector (GC-ECD).

This document was developed by merging of EN 16167:2018, initially elaborated as a CEN Technical Specification in the European project 'HORIZONTAL' and validated by CEN/TC 400 with the support of BAM, with EN 15308, published by CEN/TC 292.

Considering the different matrices and possible interfering compounds, this document does not contain one single possible way of working. Several choices are possible, in particular relating to clean-up. Detection with both MS-detection and ECD-detection is possible. Two different extraction procedures are described and 9 clean-up procedures. The use of internal and injection standards is described in order to have an internal check on choice of the extraction and clean-up procedure. The method is as far as possible in agreement with the method described for PAH (EN 16181:2018 and EN 15527:2008). It has been tested for ruggedness.

This document is applicable and validated for several types of matrices as indicated in [Table 1](#) (see also [Annex A](#) for the results of the validation).

Table 1 — Matrices for which this document is applicable and validated

Matrix	Materials used for validation
Soil	Sandy soil Mix of soil from the vicinity of Berlin, Germany and PCB-free German reference soil
Sludge	Mix of municipal waste water treatment plant sludge from North Rhine Westphalia, Germany
Biowaste	Mix of compost from the vicinity of Berlin, Germany and sludge from North Rhine Westphalia, Germany
Waste	Contaminated soil, building debris, waste wood, sealant waste, electronic waste, shredder light fraction, cable shredder waste

WARNING — Persons using this document should be familiar with usual laboratory practice. This document does not purport to address all of the safety problems, if any, associated with its use. It is the responsibility of the user to establish appropriate safety and health practices and to ensure compliance with any national regulatory conditions.

IMPORTANT — It is absolutely essential that tests conducted according to this document be carried out by suitably trained staff.

Environmental solid matrices — Determination of polychlorinated biphenyls (PCB) by gas chromatography - mass selective detection (GC-MS) or electron-capture detection (GC-ECD)

1 Scope

This document specifies methods for quantitative determination of seven selected polychlorinated biphenyls (PCB28, PCB52, PCB101, PCB118, PCB138, PCB153 and PCB180) in soil, sludge, sediment, treated biowaste, and waste using GC-MS and GC-ECD (see [Table 2](#)).

Table 2 — Target analytes of this document

Target analyte		CAS-RN ^a
PCB28	2,4,4'-trichlorobiphenyl	7012-37-5
PCB52	2,2',5,5'-tetrachlorobiphenyl	35693-99-3
PCB101	2,2',4,5,5'-pentachlorobiphenyl	37680-73-2
PCB118	2,3',4,4',5-pentachlorobiphenyl	31508-00-6
PCB138	2,2',3,4,4',5'-hexachlorobiphenyl	35065-28-2
PCB153	2,2',4,4',5,5'-hexachlorobiphenyl	35065-27-1
PCB180	2,2',3,4,4',5,5'-heptachlorobiphenyl	35065-29-3
^a CAS-RN Chemical Abstracts Service Registry Number.		

The limit of detection depends on the determinants, the equipment used, the quality of chemicals used for the extraction of the sample and the clean-up of the extract.

Under the conditions specified in this document, lower limit of application from 1 µg/kg (expressed as dry matter) for soils, sludge and biowaste to 10 µg/kg (expressed as dry matter) for solid waste can be achieved. For some specific samples the limit of 10 µg/kg cannot be reached.

Sludge, waste and treated biowaste may differ in properties, as well as in the expected contamination levels of PCB and presence of interfering substances. These differences make it impossible to describe one general procedure. This document contains decision tables based on the properties of the sample and the extraction and clean-up procedure to be used.

NOTE The analysis of PCB in insulating liquids, petroleum products, used oils and aqueous samples is referred to in EN 61619, EN 12766-1 and ISO 6468 respectively.

The method can be applied to the analysis of other PCB congeners not specified in the scope, provided suitability is proven by proper in-house validation experiments.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5667-15, *Water quality — Sampling — Part 15: Guidance on the preservation and handling of sludge and sediment samples*

ISO 18475:2023(E)

ISO 8466-1, *Water quality — Calibration and evaluation of analytical methods — Part 1: Linear calibration function*

ISO 16720, *Soil quality — Pretreatment of samples by freeze-drying for subsequent analysis*

ISO 18512, *Soil quality — Guidance on long and short term storage of soil samples*

ISO 22892, *Soil quality — Guidelines for the identification of target compounds by gas chromatography and mass spectrometry*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 critical pair

pair of congeners that shall be separated to a predefined degree (e.g. $R = 0,5$) to ensure chromatographic separation meets minimum quality criteria

$$R = 2 \times \frac{\Delta t}{Y_a + Y_b} \quad (x) \quad (1)$$

where

R resolution

Δt difference in retention times of the two peaks a and b in seconds (s)

Y_a peak width at the base of peak a in seconds (s)

Y_b peak width at the base of peak b in seconds (s)

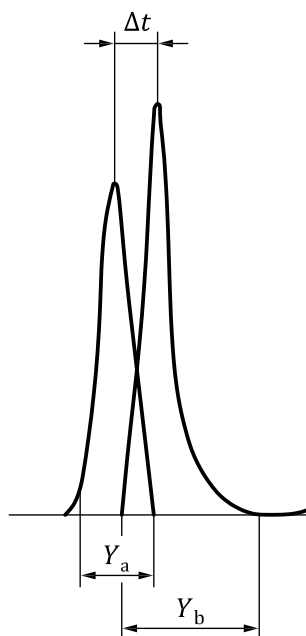


Figure 1 — Example of a chromatogram of a critical pair

3.2 congener

member of the same kind, class or group of chemicals, e.g. anyone of the two hundred and nine individual PCB

Note 1 to entry: The IUPAC congener numbers are for easy identification; they do not represent the order of chromatographic elution.

3.3 injection standard

¹³C₁₂-labelled PCB or other PCB that is unlikely to be present in samples, added to the sample extract before injection into the gas chromatograph, to monitor variability of instrument response and the recovery of the internal standards

3.4 internal standard

¹³C₁₂-labelled PCB or other PCB that are unlikely to be present in samples, added to the sample before extraction and used for quantification of PCB content

3.5 polychlorinated biphenyl PCB

biphenyl substituted with one to ten chlorine atoms

3.6 sediment

solid material, both mineral and organic, deposited in the bottom of a water body

[SOURCE: ISO 5667-12:2017]

4 Principle

Due to the multi-matrix character of this document, different procedures for different steps (modules) are allowed. Which modules should be used depends on the sample. A recommendation is given in this document. Performance criteria are described and it is the responsibility of the laboratories applying this document to show that these criteria are met. Using of spiking standards (internal standards)

ISO 18475:2023(E)

allows an overall check on the efficiency of a specific combination of modules for a specific sample. But it does not necessarily give the information regarding the extensive extraction efficiency of the native PCB bonded to the matrix.

After pre-treatment, the sample is extracted with a suitable solvent.

The extract is concentrated by evaporation. If necessary, interfering compounds are removed by a clean-up method suitable for the specific matrix, before the concentration step.

The extract is analysed by gas chromatography. The various compounds are separated using a capillary column with a stationary phase of low polarity. Detection occurs by mass spectrometry (MS) or an electron capture detector (ECD).

PCB are identified and quantified by comparison of relative retention times and relative peak heights (or peak areas) with respect to internal standards added. The efficiency of the procedure depends on the composition of the matrix that is investigated.

5 Interferences

5.1 Interference with sampling and extraction

Use sampling containers of materials (preferably of steel, aluminium or glass) that do not affect the sample during the contact time. Avoid plastics and other organic materials during sampling, sample storage or extraction. Keep the samples from direct sunlight and prolonged exposure to light.

During storage of the samples, losses of PCB may occur due to adsorption on the walls of the containers. The extent of the losses depends on the storage time.

5.2 Interference with GC

Substances that co-elute with the target PCB may interfere with the determination. These interferences may lead to incompletely resolved signals and may, depending on their magnitude, affect accuracy and precision of the analytical results. Peak overlap does not allow an interpretation of the result. Asymmetric peaks and peaks being broader than the corresponding peaks of the reference substance suggest interferences.

Chromatographic separation between the following pairs can be critical.

- PCB28 – PCB31
- PCB52 – PCB73
- PCB101 – PCB89 / PCB90
- PCB118 – PCB106
- PCB138 – PCB164 / PCB163

The critical pair PCB28 and PCB31 is used for selection of the capillary column (see 8.2.2). If molecular mass differences are present, quantification can be made by mass selective detection. If not or using ECD, the specific PCB is reported as the sum of all PCBs present in the peak. Typically, the concentrations of the co-eluting congeners compared to those of the target congeners are low. When incomplete resolution is encountered, peak integration shall be checked and, when necessary, corrected.

Presence of tetrachlorobenzyltoluene (TCBT)-mixtures or sulfur can disturb the determination of the PCB with GC-ECD.

High mineral oil content can also disturb the determination of PCB with GC-MS.