

ISO/FDIS 5491:~~2022~~2023(E)

ISO TC 20/SC 17/WG 1

Date: ~~2022-12-21~~2023-02-22

Secretariat: ANSI

Vertiports — Infrastructure and equipment for vertical take-off and landing (VTOL) of electrically powered cargo unmanned aircraft systems (UAS)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 5491

<https://standards.iteh.ai/catalog/standards/sist/e429a7b3-e274-487c-8f2f-d18d5af480cb/iso-fdis-5491>

Edited DIS - MUST BE USED FOR FINAL DRAFT

© ISO ~~2022~~2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

CP 401 • Ch. de Blandonnet 8

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Email: copyright@iso.org

Website: www.iso.org

Published in Switzerland

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 5491

<https://standards.iteh.ai/catalog/standards/sist/e429a7b3-e274-487c-8f2f-d18d5af480cb/iso-fdis-5491>

Contents

Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative references.....	1
3 Terms and definitions.....	1
3.1 Vertiport Information System.....	1
3.2 External System (ES)	2
3.3 Vertiport Information System Service Provider	2
3.4 Operation Interface	2
3.5 Dynamic Information.....	2
3.6 Static Information	2
3.7 Obstacle	3
4 Abbreviated terms	3
5 Requirements for the vertiport, under the responsibility of the manufacturer	3
5.1 Design	3
5.2 Ensuring safety	5
5.3 Communication	5
5.4 Log.....	7
5.5 Quality control.....	7
5.6 Instruction manual.....	8
6 Requirement for VIS under the responsibility of the VIS SP	9
6.1 Design	9
6.2 Ensuring safety	10
6.3 Communication	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 17, *Airport infrastructure*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The demand for unmanned aircraft has been increasing in recent years for a variety of applications, including military and civilian [personal (hobby) and commercial] applications.

Particular focus has been placed on the logistics sector. The most difficult part of these operations is the departure and approach of the unmanned aircraft; and a vertiport is a device to support this. This document defines the requirements for constructing a vertiport. The components of the vertiport are assumed to be the following.

A vertiport system consists of two elements: a vertiport and a vertiport information system. The vertiport is connected to the vertiport information system; the vertiport information system is connected to the external system, and external system is connected to the unmanned aircraft system. In some cases, the unmanned aircraft system is directly connected to the vertiport to ensure safety during approach. The vertiport consists of software and hardware. The external system is responsible for assisting the unmanned aircraft system operator in making decisions and communicating with the vertiport information system and the unmanned aircraft system.

The vertiport communicates only with the vertiport information system, and does not communicate directly with ~~the external~~ the external system; but it transmits information via the vertiport information system.

In addition, the use cases covered in this document are assumed to be logistics based on automatic navigation by non-visual flight; and where the cargo is stored at the landing site. However, this does not imply that the document cannot be applied to other use cases. This document ~~applies to vertiports of type A (micro) as defined in ISO 5015-2. It~~ does not cover vertiport operations and services covered by ISO 5015-2, developed by ISO/TC 20/SC 16 (UAS), which includes ground handling, interface with external systems, such as ~~Unmanned Aircraft System Traffic Management Service Providers~~ unmanned aircraft system traffic management service providers, and safety and quality of vertiport operators.

<https://standards.iteh.ai/catalog/standards/sist/e429a7b3-e274-487c-8f2f-d18d5af480cb/iso-fdis-5491>

Vertiports — Infrastructure and equipment for vertical take-off and landing (VTOL) of electrically powered cargo unmanned aircraft systems (UAS)

1 Scope

This document defines the requirements for constructing a vertiport.

This document applies to vertiports of type A (micro) as defined in ISO 5015-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21384-4, *Unmanned aircraft systems — Part 4: Vocabulary*

~~ISO 21895:2020, *Categorization and classification of civil unmanned aircraft systems*~~

ISO 5015-2, *Unmanned aircraft systems — Part 2: Operation of vertiports for vertical take-off and landing (VTOL) unmanned aircraft (UA)*

<https://standards.iteh.ai/catalog/standards/sist/e429a7b3-e274-487e-8f2f-d18d5af480cb/iso-23629-5>, *UAS Traffic Management (UTM) — Part 5: UTM functional structure*

ISO 23629-12:2022, *UAS ~~Traffic Management~~traffic management (UTM) — Part 12: Requirements for UTM service providers*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21384-4:2022, ISO 5015-2 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

vertiport information system

VIS


system for centralized management of all information necessary for unmanned aircraft system (UAS) operations at the vertiports

Note 1 to entry: It manages the operational status of each vertiport.


ISO/FDIS 5491:2023(E)

Note 2 to entry: It communicates with the vertiport and the *external system (ES)* (3.2), and serves as an intermediary between them, but does not communicate with the UAS. It is assumed that there are cases where vertiport information system functions are included in the ES.

Note 3 to entry: The system composition including the vertiport information system and other systems is shown in Figure 1.

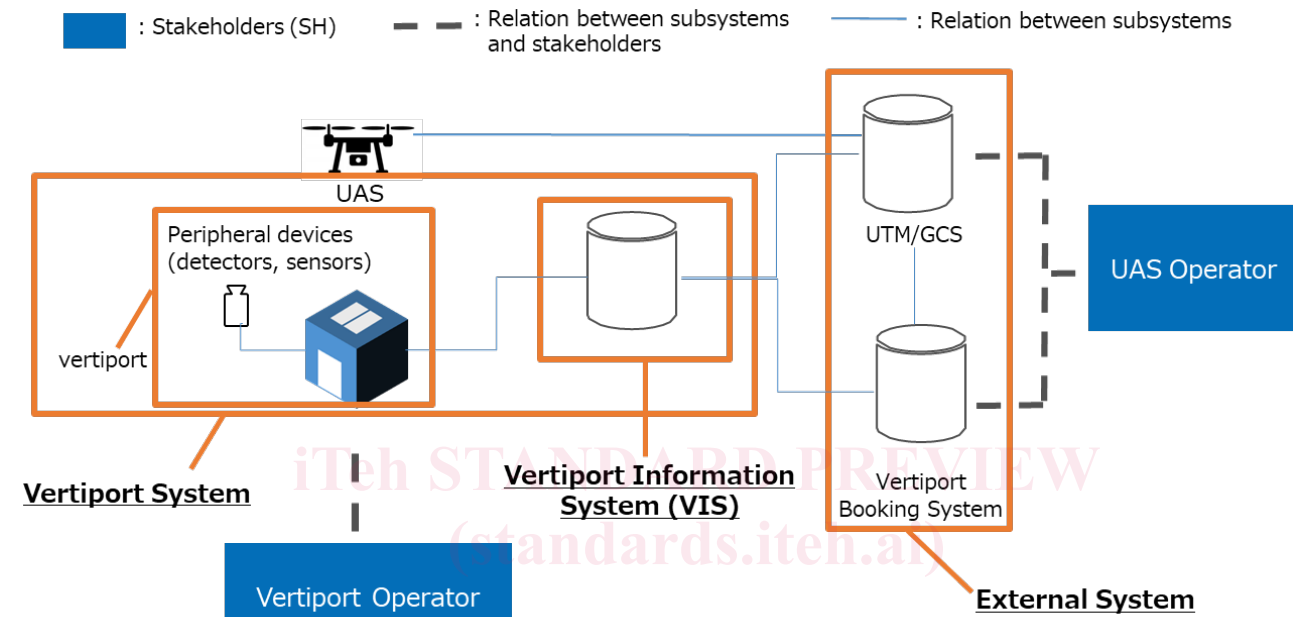

ISO/FDIS 5491
<https://standards.iteh.ai/catalog/standards/sist/e429a7b3-e274-487c-8f2f-d18d5af480cb/iso-fdis-5491>

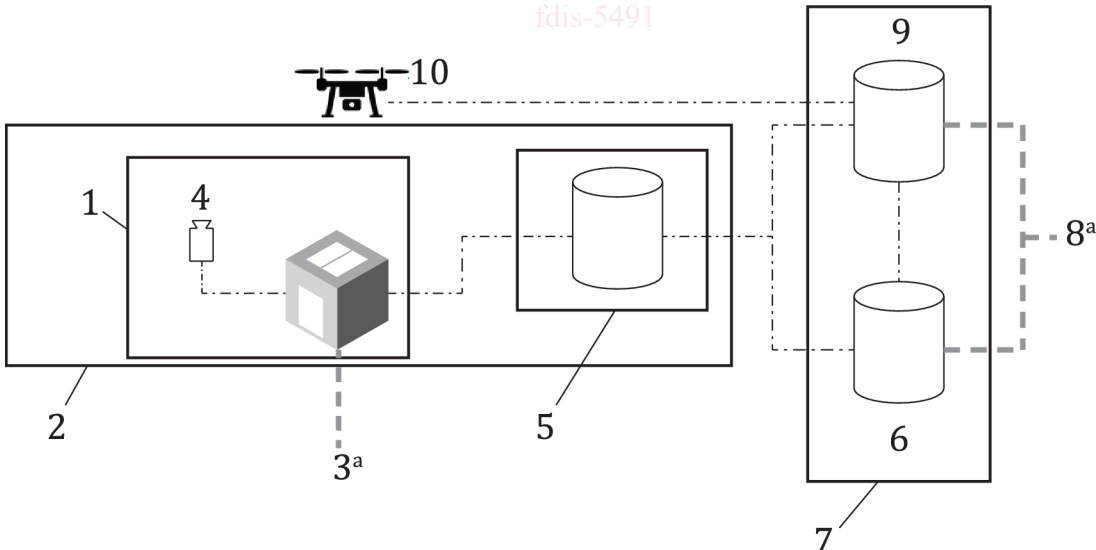

- Key**
- 1 vertiport
 - 2 vertiport system
 - 3 vertiport operator
 - 4 peripheral devices (detectors, sensors)
 - 5 vertiport information system (VIS)

6	<u>vertiport booking system</u>
7	<u>external system</u>
8	<u>UAS operator</u>
9	<u>UTM/GCS</u>
10	<u>UAS</u>
	<u>relation between subsystems and stakeholders</u>

	<u>relation between subsystems</u>

a	<u>Stakeholders (SH).</u>

Figure 1 — System composition

3.2

external system

ES

all actors related to vertiport operations other than the *vertiport operator* (3.3) and possible additional logistics management systems

Note 1 to entry: All actors (i.e. either users or service providers of digital information) necessary for unmanned aircraft system traffic management, shall be encompassed by the functional architecture in ISO 23629-5.

Note 2 to entry: The ES communicate directly with the *vertiport information system* (3.1).

3.3

vertiport operator

legal or natural person ensuring safe and secure functionality of the *vertiport system (VIS)* (3.1)

Note 1 to entry: Vertiport ~~Operator~~operators shall follow the requirements of ISO 23629-12:2022. b/iso-fdis-5491

3.4

operation interface

interface at the vertiport that is operated by the *vertiport operator* (3.3) to monitor and control the vertiport

3.5

dynamic information

information necessary for unmanned aircraft system operations at the vertiport, which is subject to frequent changes over time

Note 1 to entry: Dynamic information includes the operational status of the vertiport, the measured sensor information, and the availability of the storage location.

3.6

static information

information necessary for unmanned aircraft system operations at the vertiport, which is not subject to frequent changes over time

Note 1 to entry: Static information includes manufacturer information, administrator information, connectable *vertiport information systems (VIS)* (3.1) or other unmanned aircraft system traffic management actors, and other information that is initially configured and stable over time.

Note 2 to entry: Static information may be updated by the *vertiport information system service provider operator* (3.3) or *vertiport manufacturer* through an established process.

3.7

obstacle

~~all~~ fixed (whether temporary or permanent) and mobile ~~objects~~object, or parts thereof, that:

- a) ~~are~~is located on an area intended for the surface movement of unmanned aircraft;
- b) ~~extend~~extends above a defined surface intended to protect unmanned aircraft in flight; or
- c) ~~stand~~stands outside those defined surfaces and that ~~have~~has been assessed as being a hazard to air navigation.

4 Abbreviated terms

ES	external system
GCS	ground control system
GNSS	global navigation satellite system
SP	service provider
RTK	real time kinematics
UAS	unmanned aircraft system
UTM	UAS traffic management
VIS	vertiport information system
VTOL	vertical take-off and landing

5 Requirements for the vertiport, under the responsibility of the manufacturer

5.1 Design

5.1.1 Functional requirements

5.1.1.1 General and operation

The vertiport shall:

- a) be able to detect abnormalities in the vertiport's surrounding environment, climate, and vertiport function operation, which can be used to respond to emergencies;

The vertiport operator should address the operational safety aspects of an emergency, taking into account the legitimate interests of other statutory bodies such as the police and emergency services.

- b) be highly visible, and uninformed person shall know that it is a vertiport (e.g. it shall have an airplane warning light);

The vertiport operator may use lights other than those used by airports, heliports or military airfields.

- c) have its bearing load and shock resistance specified and clearly marked on the vertiport at the time of manufacture;