
**Graphic technology and
photography — Colour
characterization of digital still
cameras (DSCs) —**

Part 5:

**Colour targets including saturated
colours for colour characteristic
evaluation test for colorimetric
image capture**

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b7c7c7c7c7c>

**Technologie graphique et photographie — Caractérisation de la
couleur des appareils photonumériques —**

*Partie 5: Cibles de couleurs incluant des couleurs saturées pour l'essai
d'évaluation des caractéristiques chromatiques pour la capture
d'images en mode colorimétrique*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TR 17321-5:2021](https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021)

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Highly-saturated colour targets.....	2
4.1 General.....	2
4.2 Extension of real existing spectra using eigenvector method.....	2
4.2.1 General.....	2
4.2.2 Selection of spectra database.....	2
4.2.3 Spectral reconstruction from the eigenvectors.....	3
4.3 Artificial (LED-based) spectra whose wavelength peak is on colour-difference-sensitive wavelength (CDSW).....	4
4.3.1 General.....	4
4.3.2 The method to define the colour-difference-sensitive wavelength (CDSW).....	4
4.3.3 Selection of LED for CDSW targets.....	6
5 FOM metric for evaluation of overall sensor spectral sensitivities, used in the digital cameras.....	8
5.1 General.....	8
5.2 Evaluation metrics for OSSS.....	8
5.3 Advantages and disadvantages of ΔE (deltaE) evaluation.....	9
5.4 How 17321-5 datasets can be used for <i>FOMs</i>	9
5.5 Worked examples.....	11
Annex A (informative) Selection and eigenvectors of spectral distribution set.....	13
Annex B (informative) Colour gamut of boundary colour.....	15
Annex C (informative) Worked example for spectral distribution generation of Pointer's surface colours.....	16
Annex D (informative) Background information for defining CDSW.....	26
Annex E (informative) Additional 410nm to colour-difference-sensitive wavelengths (CDSW).....	29
Annex F (informative) Colour differences of patches of CDSW target.....	30
Annex G (informative) Spectral distribution of CDSW target for ITU-R BT.2020.....	31
Annex H (informative) Spectral distribution dataset for users to download.....	34
Bibliography.....	35

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 42, *Photography*.

A list of all parts in the ISO 17321 series can be found on the ISO website.

Introduction

There are many application areas such as medical imaging, cosmetics, e-commerce, sales catalogue, fine art reproduction, art archive etc. where colorimetric image capture and colorimetric image reproduction are desired. When precise colorimetric reproduction is required for the subjects that include highly-saturated colours, it is desirable that overall sensor spectral sensitivities are close to linear combinations of CIE 1931 colour matching functions.

On the other hand, real DSCs have overall sensor spectral sensitivities that deviates from linear combination of CIE 1931 colour matching functions, and yet reproduces reasonable colours for general low-saturated colour objects. This is because most of spectral distribution of real-existing objects are well self-correlated in the wavelength direction. This is also true for the frequently-used colour target such as X-rite colour checker classic.

Therefore, when the precise colour reproduction is required for highly-saturated colour objects, it is important to use spectral distribution that are less self-correlated in the wavelength direction, for the evaluation of overall sensor spectral sensitivities.

For this purpose, [Clause 3](#) proposes two methods for generating highly-saturated colour targets. The first method is statistical extension of existing objects spectra, and the second one is selection from artificial (LED-based) spectra.

[Clause 4](#) then describes how these highly-saturated colour targets can be used for goodness evaluation of overall sensor spectral sensitivities. Applicability of several existing evaluation metrics (such as Vora's μ -factor and Sharma's FOM) are compared, using highly saturated targets generated by the methods proposed in [Clause 4](#).

[Annex B](#) gives details on colour gamut of boundary colour and [Annex F](#) gives more information on colour differences of patches of CDSW target.

ISO/TR 17321-5:2021

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TR 17321-5:2021

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>

Graphic technology and photography — Colour characterization of digital still cameras (DSCs) —

Part 5:

Colour targets including saturated colours for colour characteristic evaluation test for colorimetric image capture

1 Scope

This document describes sample methods to generate spectra for colour targets comprised of highly saturated colours for colour characteristic evaluation of colorimetric image capture capability of digital still cameras (DSCs).

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

colour-difference-sensitive wavelength CDSW

wavelength sensitive to colour difference

3.2

colour matching functions

tristimulus values of monochromatic stimuli of equal radiant power

[SOURCE: CIE Publication 17.4, 845-03-23]

3.3

digital still camera DSC

device which incorporates an image sensor and produces a digital signal representing a still picture

[SOURCE: ISO 12232:2012, 3.40, modified — Notes 1 and 2 to entry have been deleted.]

3.4

light-emitting diode LED

semiconductor diode that emits non coherent optical radiation through stimulated emission resulting from the recombination of electrons and photons, when excited by an electric current

[SOURCE: IEC 60050-521, 521-04-39]

3.5 overall sensor spectral sensitivities OSSS

spectral sensitivities of overall sensor components, which could be derived as spectral sensitivities' product of optical elements (including IR/UV-cut filter), colour filter sets, and image sensor

3.6 tristimulus values

amounts of the three reference colour stimuli, in a given trichromatic system, required to match the colour of the stimulus considered. (*see colour matching functions*)

[SOURCE: CIE Publication 17.4, 845-03-22]

4 Highly-saturated colour targets

4.1 General

This document proposes two different methods for generating highly-saturated colour targets.

First one is "Extension of real existing spectra using an eigenvector method". Naturally existing saturated colour spectra are usually very difficult to obtain by measurement. Therefore, computed spectra are extended from the eigenvectors generated from spectral databases.

Second one is "Artificial (LED-based) spectra whose wavelength peak is on colour-difference-sensitive wavelength (CDSW)". Mathematical analysis was performed to select the wavelengths which were colour-difference-sensitive. Artificial (LED-based) spectra were then generated whose peak matches colour-difference-sensitive wavelength (CDSW).

4.2 Extension of real existing spectra using eigenvector method

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>

4.2.1 General

The eigenvector-based procedure for generating highly-saturated colour targets is as follows:

- selection of spectral database (see [4.2.2](#));
- spectral reconstruction from the eigenvectors (see [4.2.3](#));
- calculation of boundary colours (see [4.2.3.2](#));
- calculation of saturated-colours using reference spectral distribution (see [4.2.3.3](#)).

4.2.2 Selection of spectra database

The wavelength range and wavelength increment are user-definable. ISO 17321-1^[Z] described that the wavelength range is 380 nm to 730 nm with a sampling interval of 10 nm or less. The spectral distribution set selected depends on user's application.

The brightness level of the spectral distribution selected can be ignored because the brightness level is tuneable by scaling the eigenvectors used for spectral distribution reconstruction. Hue angle of the selected spectral distribution is very important and the use of evenly-spaced hue angle is recommended.

An example of the eigenvector sets (E_{ij}) is calculated on the selected spectral distribution set (described in [Annex A](#)).

4.2.3 Spectral reconstruction from the eigenvectors

4.2.3.1 General

Spectra from the original dataset using [Formula 1](#) can be computed as linear combination of eigenvectors.

The following notation is used for this example:

M : number of wavelengths to be used,

N : number of eigenvectors to be used,

E_{ij} : i -th wavelength component of the j -th eigenvector ($i = 1, M; j = 1, N$),

w_j : weight of j -th eigenvector ($j = 1, N$),

r_i : i -th wavelength component of a spectrum ($i = 1, M$).

$$r_i = \sum_{j=1}^N (w_j \cdot E_{ij}) \quad (1)$$

Conversely, the weights required to reconstruct a reflectance spectrum from the dataset are a linear combination of the reflectance spectrum and the eigenvectors:

$$w_j = \sum_{i=1}^M (r_i \cdot E_{ij}) \quad (2)$$

Two cases are considered here:

- a) The boundary colour case determines the set of spectra that represent the chromatic limit as a function of hue maximally achievable based on the fundamental characteristics of an underlying spectral dataset where the resulting spectra are linear combinations of a subset of selected dataset eigenvectors.
- b) The saturated colour case produces arbitrary highly saturated spectra from a linear combination of a subset of selected eigenvectors of a spectral dataset even though the target spectra are not from the dataset from which the eigenvectors are computed and therefore will only be an approximate match to the target spectra.

Both use [Formula \(1\)](#) but have different constraint conditions for the optimization process.

4.2.3.2 Boundary colour generation

Boundary colours are those colours whose spectral distributions have maximum chroma for a given hue angle.

There are numerous ways to identify which spectral reflectance vectors r_i have to be selected. The simplest method is to index through all weights w_j at a reasonable increment to produce a large set of r_i , compute the resulting hue and chroma values for the set of r_i , then select the subset of r_i that yields maximum chroma for each hue angle of interest.

However, it is preferred to recast [Formula \(1\)](#) so that it can be constrained for maximum chroma, hue angle, smoothness, or other conditions that are suitable for the intended application and to use general-purpose numerical optimization methods to solve for the optimal weights w_j directly. The resulting spectral reflectance vector r_i is constrained to the range [0,0,1.0]. [Annex H](#) describes those spectral distributions.

4.2.3.3 Saturated-colour generation using the reference spectra distribution set

It is possible to approximate an arbitrary target spectrum r using the eigenvectors of a spectral dataset, even if the target spectrum does not share the same fundamentals as the reference spectral dataset from which the eigenvectors were derived. This approximation r' is the least-squares match to the target spectrum r , typically subject to constraints.

For instance, it is possible to calculate highly saturated colour target spectra r' having a C^* value larger than a reference spectrum while maintaining L^* and hue angle. This C^* for each reference colour target is determined prior to nonlinear optimization described in Annex C. Objective parameter for nonlinear optimization is to keep predetermined C^* . Annex C shows an example in the case of Pointer’s surface colours. There are many metamers of the candidate spectrum and users need to select the appropriate spectrum from many metamers. This step is applicable to other cases where any reference distribution and its objective chromaticity are given.

Annex C shows a generation method which calculates spectral distribution corresponding to CIELAB values of Pointer’s surface colour[6]. Annex H describes those spectral distributions.

Given an arbitrary highly saturated target spectrum r , the goal is to produce an approximate match r' from a selected subset of the eigenvectors of the reference spectral dataset. However, there are many possible candidate matches r' depending on the initial w_j selected for the optimization process. One approach is to compute the starting weights for nonlinear numerical optimization with Formula 2. The weights w are substituted into Formula 1 producing an approximate match r' and w is iterated until the error between r' and r is minimized. Using generalized numerical optimization, this method calculates w_j to minimize the sum of the squares of the differences between the closest matching spectrum achievable r' by the selected eigenvector subset.

STANDARD PREVIEW
(standards.iteh.ai)

4.3 Artificial (LED-based) spectra whose wavelength peak is on colour-difference-sensitive wavelength (CDSW)

ISO/TR 17321-5:2021

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>

4.3.1 General

The wavelength range for colour target spectra for camera uses is from 380 nm to 730 nm according to ISO 17321-1.

The CDSW-based procedure for generating highly-saturated colour targets is as follows:

- The method to define CDSW (See 4.3.2)
- Selection of CDSW (See 4.3.3)

4.3.2 The method to define the colour-difference-sensitive wavelength (CDSW)

Factors of colour difference, Fac_a^* and Fac_b^* are defined based on the colour matching functions as shown in Formulae (3) and (4). Fac_a^* and Fac_b^* are function of X and Z, respectively. The reasons and the processes of deriving Fac_a^* and Fac_b^* are described in Annex D.

$$Fac_a^*(\lambda) = 500 \times \left\{ f \left(\frac{\bar{x}(\lambda)}{X_n} \right) - \frac{16}{116} \right\} \tag{3}$$

$$Fac_b^*(\lambda) = 200 \times \left\{ f \left(\frac{\bar{z}(\lambda)}{Z_n} \right) - \frac{16}{116} \right\} \tag{4}$$

where

$$f(t) = \begin{cases} t^{1/3}, & t > 0,008856 \\ 7,787 \times t + 0,138, & t \leq 0,008856 \end{cases}$$

$$X_n = 0,9504, Z_n = 1,0889$$

$$\text{Diff } Fac_a^*(\lambda) = \frac{Fac_a^*(\lambda + \Delta) - Fac_a^*(\lambda)}{\Delta} \quad (5)$$


$$\text{Diff } Fac_b^*(\lambda) = \frac{Fac_b^*(\lambda + \Delta) - Fac_b^*(\lambda)}{\Delta} \quad (6)$$

Calculated values of the factors are drawn against wavelength in [Figure 1](#). It can be said that the wavelength where the colour difference between the colour matching functions and the camera is most likely to be the maximum and peak wavelength of the slope of the waveform in [Figure 1](#). Wavelength ranges where the Δa^* and Δb^* have peak values are very similar to those of the maximum, minimum and inflection points of the curves of the factors.

In order to find those points, the derivatives of Fac_a^* and Fac_b^* with wavelength as shown in [Formulae \(5\)](#) and [\(6\)](#) are calculated ([Figure 2](#)). Wavelengths at which large colour differences most likely appear are determined by the points where the derivative is maximum, minimum and crosses zero from plus to minus and vice versa. Wavelengths corresponding to those points are 420 nm, 440 nm, 480 nm, 500 nm, 505 nm, 510 nm, 600 nm and 650 nm. These wavelengths are listed [Table 1](#) and also indicated in [Figure 2](#).

(standards.iteh.ai)


NOTE The reasons why we use the wavelength where the derivative is maximum, minimum and zero are as follows. The optimization process to obtain conversion matrix from camera sensitivity to colour matching function was carried out using the least square method to minimize ΔS . In the process, each one of transformed XYZ functions is adjusted to one of the matching functions by increasing (decreasing) intensity at peak wavelength where the derivative is zero, and simultaneously decreasing (increasing) it at steep slope's wavelength where the derivative is maximum or minimum. Therefore, at wavelengths where derivative is maximum, minimum and zero, colour differences can often appear.

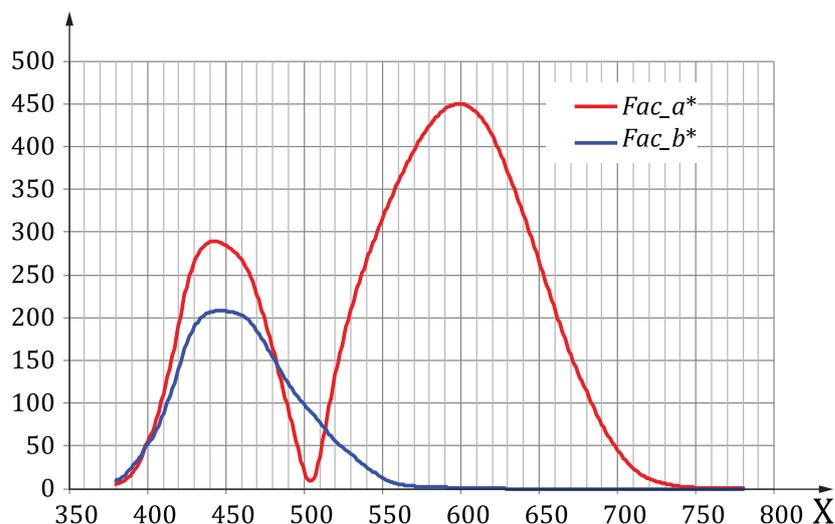

Key

X wavelength, λ , in nm

Figure 1 — Fac_a^* and Fac_b^* plot against wavelength

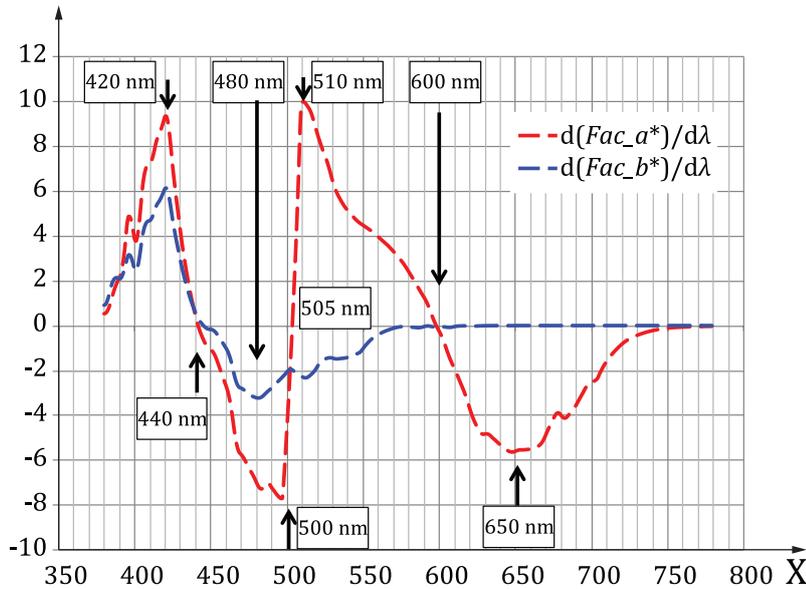

Key
 X wavelength, λ, in nm

Figure 2 — Differentiated values of Fac_a* and Fac_b*

Wavelengths of 500 nm, 505 nm and 510 nm are very close to each other and their effect on colour difference is similar and so the wavelength of 505 nm is chosen to represent these three wavelengths.

Table 1 — Candidate of CDSW corresponding to maximum, minimum and zero of derivative

<https://standards.iteh.ai/catalog/standards/sist/2c05ccf2-6b48-4aaa-9afe-8b536e2ee593/iso-tr-17321-5-2021>

	420	440	480	500	505	510	600	650
$d(Fac_a^*)/d\lambda$	max	0	min	↗	0	max	0	min
$d(Fac_b^*)/d\lambda$	max	0	↘	min	↗	↗	→	→

↗, ↘ and → signs in Table 1 mean “increase”, “decrease” and “no change” respectively.

Based on this analysis, wavelengths of 420 nm, 440 nm, 480 nm, 505 nm, 600 nm and 650 nm are selected as the colour-difference-sensitive wavelengths (CDSW).

4.3.3 Selection of LED for CDSW targets

In the next step, the spectral distribution of highly saturated colour target will be specified based on CDSWs.

It is ideal for CDSW target to use laser devices. However considering availability at this time, LEDs are recommended and may be more practical. Appropriate devices in accordance with technology progress in future will be adopted.

It is recommended that LEDs used for CDSW targets have the following conditions.

- Use existing LEDs which has the peak wavelength of LEDs is within +/- 3 nm of CDSWs,
- Or Find similar LEDs with the peak wavelength defined by CDSW (peak does not have to be exact).
- Find LED-like width and generate the spectra artificially.

NOTE LED-like width is easily found because it is naturally determined according to LED's materials and structures at around the CDSWs.

- The shape of the spectrum is that of Gaussian distribution.
- The LEDs don't have any phosphors,
- The LEDs have no side peaks.


[Figure 3](#) shows spectral distribution of the LEDs which are selected under above conditions.

In [Figure 3](#), a set of realisable spectral distributions are shown corresponding to the six CDSWs.

The six-colour patches are named 'CDSW target'. Spectral values for the colours of these patches are listed in [Table H.1](#).

For reader relevance, calculated chromaticities of the six highly saturated colours and their chromaticities as captured (and estimated) by camera A and camera B are also plotted in [Figure F.1](#).

In addition to these CDSW targets, the colour differences are equally large for wavelengths around 410 nm on several cameras when colour difference analysis is carried out as described in [Annex E](#). Therefore, 410 nm wavelength can be added to CDSW targets in place of 420nm wave length depending on user's application.

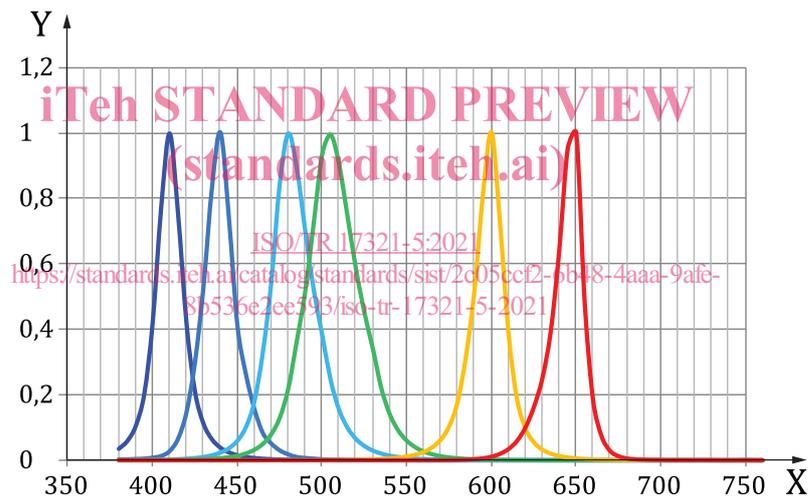

Key

- X wavelength, λ , in nm
Y relative intensity

Figure 3 — Spectral distribution of each patch of CDSW target

In 2018, very wide gamut broadcast service, ITU-R BT.2020, were launched. It is very useful to show how to use CDSW targets in practice by applying to the specific system.

[Annex G](#) describes a method to define a highly saturated colour target for cameras designed to capture specific RGB colour spaces. When the destination RGB of a camera is fixed, the method for creating highly saturated colour target is explained using the ITU-R BT.2020^[5] standard as an example.