
INTERNATIONAL STANDARD 3046 / IV

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Reciprocating internal combustion engines : Performance — Part IV : Speed governing

*Moteurs alternatifs à combustion interne : Performance —
Partie IV : Régulation de la vitesse*

iTeh STANDARD PREVIEW

First edition — 1978-09-01

(standards.iteh.ai)

ISO 3046-4:1978

<https://standards.iteh.ai/catalog/standards/sist/f0482220-8af8-45d0-b19e-3d82b96388ff/iso-3046-4-1978>

UDC 621.43.01 : 62-531.6

Ref. No. ISO 3046/IV-1978 (E)

Descriptors : internal combustion engines, reciprocating engines, variable speed drives, speed measurement, classifying.

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3046/IV was developed by Technical Committee ISO/TC 70, *Internal combustion engines*, and was circulated to the member bodies in May 1977.

(standards.iteh.ai)

It has been approved by the member bodies of the following countries :

| | | |
|----------------|------------------------|-----------------------|
| Australia | India | South Africa, Rep. of |
| Austria | Ireland | Spain |
| Belgium | Italy | Switzerland |
| Bulgaria | Japan | Turkey |
| Chile | Korea, Dem. P. Rep. of | United Kingdom |
| Czechoslovakia | Korea, Rep. of | U.S.A. |
| Denmark | Mexico | U.S.S.R. |
| France | Netherlands | Yugoslavia |
| Germany | Romania | |

No member body expressed disapproval of the document.

Reciprocating internal combustion engines : Performance — Part IV : Speed governing

1 SCOPE

This International Standard establishes a classification for the requirements and parameters of speed governing systems for reciprocating internal combustion engines. Where necessary, individual requirements may be given for particular engine applications.

2 FIELD OF APPLICATION

This International Standard applies to reciprocating internal combustion engines for land, rail-traction and marine use, excluding engines used to propel road construction and earth-moving machines, agricultural and industrial types of tractors, automobiles and trucks and aero-engines. Also excluded are self-governing engines and those engines requiring only maximum speed or fuel delivery limitation.

3 REFERENCES

ISO 3046/I, *Reciprocating internal combustion engines : Performance — Part I : Standard reference conditions and declarations of power, fuel consumption and lubricating oil consumption.*

ISO 3046/II, *Reciprocating internal combustion engines : Performance — Part II : Test methods.*

ISO 3046/III, *Reciprocating internal combustion engines : Performance — Part III : Test measurements.*

4 CLASSIFICATION OF GOVERNING SYSTEMS

4.1 The classification of governing systems is based on :

- the speed conditions to be controlled (table 1);
- the accuracy of governing (table 2).

4.1.1 Suivant la plage de vitesse, trois types de régulation sont définis dans le tableau 1.

Governing of a selected speed or speeds is provided within prescribed limits of precision in accordance with table 1.

TABLE 1 — Types of governing

| Type | Speed requirement |
|-------------------------------|---|
| 1 Single speed | At one predetermined speed |
| 2 Multiple speeds | At two or more predetermined speeds |
| 3 All speeds (variable speed) | At any selected speed within a pre-determined speed range |

4.1.2 The class of accuracy and the necessary parameters of this class required for a particular application shall be selected from tables 2 and 3 by agreement between the manufacturer and the customer, taking into account that not all kinds of engines (for example dual fuel engines, spark ignition gas engines, etc.) are capable of meeting all the requirements of each class of governing accuracy.

TABLE 2 — Governing accuracy

| Class | Accuracy requirement |
|----------------|---|
| A ₀ | Highest requirements of governing accuracy |
| A ₁ | High requirements of governing accuracy |
| A ₂ | Normal requirements of governing accuracy |
| B ₁ | Normal requirements of governing accuracy over a wide range of speed |
| B ₂ | Reduced requirements of governing accuracy over a wide range of speed |

NOTE — Class A usually refers to the single speed type of governor.

5 TECHNICAL REQUIREMENTS OF GOVERNING SYSTEMS

The requirements for the parameters of the governing system are given in table 3.

The manufacturer shall state the normal period of time required after the start of the engine to establish controllability within the limits specified in table 3.

Where special circumstances prevent attainment of the normal period, or where a reduced period is essential, the periods of time and the technical measures to be taken as a consequence shall be subject to mutual agreement between the manufacturer and the customer (AMC).

TABLE 3 — Parameters of governing systems (Refer to figure 1 for explanatory diagram and list of symbols)

| No. | Parameter | Definition | Symbol | Formula | Class 1) | | | | |
|---------|---|--|-------------------|--|----------------|--------------------------|--------------------------|-------------------|----------------|
| | | | | | A ₀ | A ₁ | A ₂ | B ₁ | B ₂ |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 5.1 | Setting parameters | | | | | | | | |
| 5.1.1 | Range of speed setting (See figure 3) | | | | | | | | |
| 5.1.1.1 | Upward range | The range of maximum possible upward adjustment of speed from the setting corresponding to the declared power, as a percentage of the declared speed | Δn_{\max} | $\frac{n_{i, \max} - n_i}{n_r} \times 100$ | | $\geq 2,5$ | $\geq 2,5$ | ≥ 0 | ≥ 0 |
| 5.1.1.2 | Downward range | The range of maximum possible downward adjustment of speed from the setting corresponding to the declared power, as a percentage of the declared speed | Δn_{\min} | $\frac{n_i - n_{i, \min}}{n_r} \times 100$ | | $\geq \delta_{st} + 2,5$ | $\geq \delta_{st} + 2,5$ | AMC ²⁾ | AMC |
| 5.1.2 | Speed setting | Maximum difference between real and predetermined speeds under remote control, expressed as a percentage of the declared speed | Δ | | | not applicable | not applicable | ± 2 | ± 2 |
| 5.2 | Parameters of steady state behaviour | | | | | | | | |
| 5.2.1 | Steady state speed band | Width of the envelope of variation of the engine speed under steady state conditions, expressed as a percentage of the declared speed | | | | | | | |
| 5.2.1.1 | Relative power $\geq 25\%$ | | | | | $\leq 0,8$ | $\leq 1,0$ | | $\leq 2,0$ |
| 5.2.1.2 | Relative power $< 25\%$ | | | | | $\leq 1,0$ | $\leq 1,5$ | $\leq 1,5$ | AMC |
| 5.2.1.3 | Relative speed $\geq 50\%$ | | | | | | | | AMC |
| 5.2.1.4 | Relative speed $< 50\%$ | | | | | | | | ≤ 15 |
| 5.2.2 | Speed droop ³⁾ | Speed change between zero and declared power, expressed as a percentage of the declared speed at fixed speed setting | δ_{st} | $\frac{n_i - n_r}{n_r} \times 100$ | | ≤ 5 | ≤ 8 | | |

STANDARD PREVIEW
(standards.iteh.ai)

ISO 3046-4:1978
https://standards.iteh.ai/catalog/standards/sist/f0482220-8af8-45d0-b19c-3d82b96388ff/iso-3046-4-1978

1), 2), 3) : see page 4.

TABLE 3 — Parameters of governing systems (continued)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---------|---|---|------------|--|---|-----------|-----------|-----------|-----------|
| 5.3 | Parameters of dynamic behaviour (4)(5) | | | | | | | | |
| 5.3.1 | Transient speed difference caused by : | Maximum deviation of speed after sudden load change from speed previous to steady state level, expressed as a percentage of the declared speed (figure 1) | δ_d | $\frac{n_{max} - n_r}{n_r} \times 100$ | | ≤ 10 | ≤ 15 | ≤ 18 | ≤ 18 |
| 5.3.1.1 | — a sudden 100 % decrease of load for naturally aspirated and pressure charged engines | | | | | | | | |
| 5.3.1.2 | — a sudden increase in load. The maximum possible amount of a sudden increase in load from zero is : — for naturally aspirated engines : 100 % — for turbocharged 4-stroke engines : a function of the brake mean effective pressure at the declared power (see figure 2) — for turbocharged 2-stroke engines : AMC — for engines with other charge systems : AMC | | | | | | | | |
| 5.3.2 | Recovery time | The time interval from the point when the speed departs from the steady state speed band after the load change until the speed returns to and remains within the steady state speed band, associated with the new load (see figure 1); expressed in seconds | | | | | | | |
| 5.3.2.1 | At conditions of 5.3.1.1 | | | | | ≤ 8 | ≤ 15 | ≤ 18 | ≤ 18 |
| 5.3.2.2 | At conditions of 5.3.1.2 | | | | | ≤ 8 | ≤ 15 | | |

iteh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3046-4:1978
<https://standards.iteh.ai/catalog/standards/sist/f0482220-8af8-45d0-b19c-3d82b96388ff/iso-3046-4-1978>

4), 5) : see page 4.

TABLE 3 — Parameters of governing systems (concluded)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|---|--|-------------|--|---|-----------|-------------|-----|-----|
| 5.4 | Governing system factors for parallel operation | | | | | | | | |
| 5.4.1 | Rate of change of engine speed setting | Rate of change of speed setting under remote control, expressed as a percentage of the declared speed per second | ϑ | | | 0,2-1 | 0,2-1 | AMC | AMC |
| 5.4.2 | Load sharing at speed droop $\phi_{st} \geq 3\%$ within relative load range 20 to 100 % ⁶⁾ | The difference between the proportion of load taken by an individual engine and the proportion of the total load carried by all engines, expressed as a percentage | θ | $\left \frac{P_e - \frac{\sum P_e}{\sum P_{er}}}{\frac{\sum P_e}{\sum P_{er}}} \right \times 100$ P_e = individual engine load (power) $\sum P_e$ = total load (power) P_{er} = engine declared power $\sum P_{er}$ = total declared power | | ≤ 10 | $\leq 12,5$ | | |
| 5.4.3 | Power variation band | Width of the envelope of variation of the actual engine power under steady state conditions, expressed as a percentage of the declared power of the engine | γ | | | AMC | AMC | | |

- 1) The values of Class A₀, which are important in the context of a particular application, should be subject to agreement between the manufacturer and the customer. Remaining values should conform to the next lower class.
- 2) AMC represents "by agreement between Manufacturer and Customer".
- 3) When engines conforming to group 1 (see ISO 3046/II) are fitted with simple governors and are set for a service speed lower than the maximum design speed, without mechanical changes in the governor components, the droop for Classes B₁ and B₂ shall be greater in approximately inverse proportion to the service speed.
- 4) The values of the parameters of dynamic behaviour are not only determined by the speed governing equipment. They are also influenced by factors such as the type of engine, its mean effective pressure, its dead time, its speed, the type of pressure charging system fitted, the setting of the fuel stop adjustment and the moment of inertia of the whole set (engine and its driven machinery).
- 5) For the purpose of this International Standard, the load is taken to be the power and/or torque demanded from the engine by its driven machinery.
- 6) At speed droop of less than 3 % the load sharing shall be agreed between the manufacturer and the customer.

6 AGREEMENT AS TO REQUIREMENTS BETWEEN MANUFACTURER AND CUSTOMER

Whenever the customer is unable to select his requirements from the manufacturer's standard classes of governors, he should inform the manufacturer of the class of governing required and also the requirements of the auxiliary devices on the governor. Should some governing parameters required by the customer exceed those given in table 3, their values shall be subject to agreement between manufacturer and customer in accordance with table 3, class A₀.


7 TESTING OF GOVERNING SYSTEMS

The governing system shall be tested either during the acceptance test or, if necessary, during the operating test of the engine coupled to its contract driven machinery. The parameters to be checked and recorded shall be selected from table 3 by agreement between the manufacturer and the customer.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3046-4:1978

<https://standards.iteh.ai/catalog/standards/sist/f0482220-8af8-45d0-b19e-3d82b96388ff/iso-3046-4-1978>

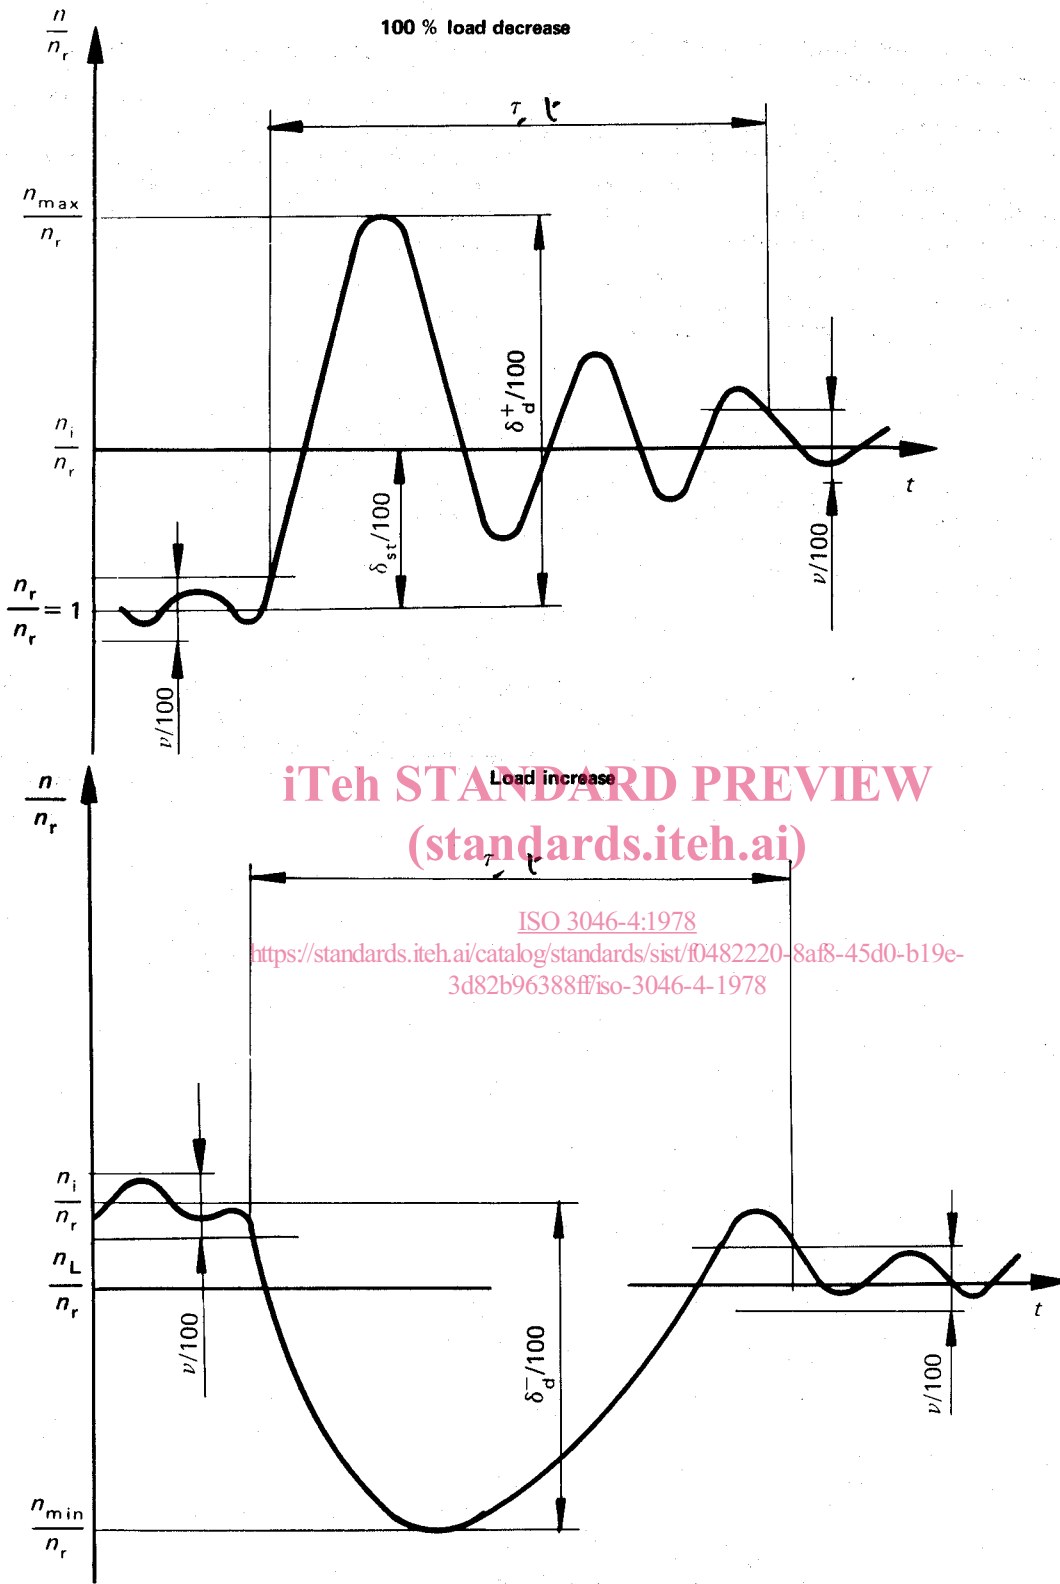

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

ISO 3046-4:1978
<https://standards.iteh.ai/catalog/standards/sist/f0482220-8af8-45d0-b19c-3d82b96388ff/iso-3046-4-1978>

- Symbols :**
- n_r = declared speed, in revolutions per minute
 - n_i = idling speed, in revolutions per minute
 - $\left. \begin{matrix} n_{max} \\ n_{min} \end{matrix} \right\}$ = transient speeds resulting from load change on the engine
 - n_L = steady state speed after partial load increase
 - t = time, in seconds

FIGURE 1 – Speed control transients

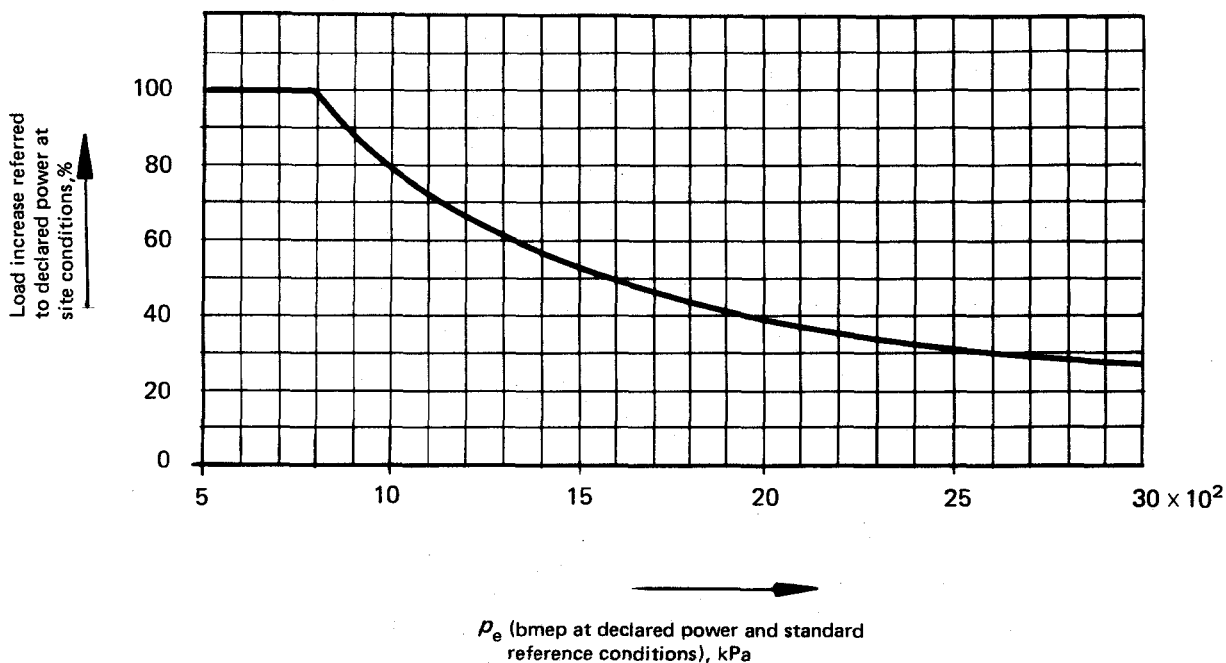


FIGURE 2 — Maximum possible sudden load increase, from zero, of turbocharged 4-stroke engines as a function of the brake mean effective pressure, p_e , at declared power

NOTE — The curve has been established from tests on a number of engines considered to be generally representative and shall be used in the absence of any other specific information. The further step or steps of an additional load increase shall be specified by the manufacturer.

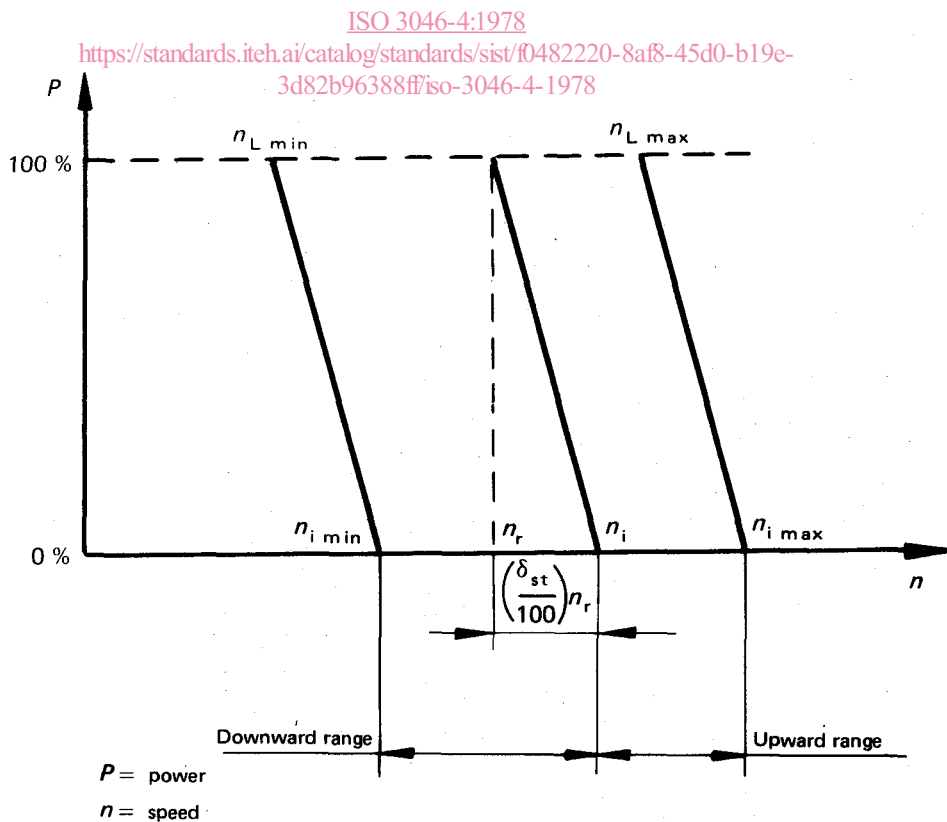


FIGURE 3 — Range of speed setting