



FINAL DRAFT International Standard

ISO/FDIS 11999-5

PPE for firefighters — Test methods and requirements for PPE used by firefighters who are at risk of exposure to high levels of heat and/or flame while fighting fires occurring in structures —

Part 5: Helmets

*Équipement de protection personnelle pour pompiers —
Méthodes d'essai et exigences pour les équipements de protection
personnelle utilisés par les pompiers qui sont à risque d'une
exposition à des niveaux élevés de chaleur et/ou de flamme quand
la lutte contre les incendies survient dans les structures —*

Partie 5: Casques

ISO/TC 94/SC 14

Secretariat: SA

Voting begins on:
2024-05-07

Voting terminates on:
2024-07-02

[ISO/FDIS 11999-5](#)

<https://standards.iteh.ai/standards/2a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5>

Document Preview

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/FDIS 11999-5](https://standards.iteh.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5)

<https://standards.iteh.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 Helmet requirements.....	2
4.1 General.....	2
4.1.1 Fit.....	3
4.1.2 Protrusions and sharp edges.....	3
4.1.3 Reinforcement.....	3
4.1.4 Protected area.....	3
4.1.5 Field of vision.....	4
4.1.6 Material innocuousness.....	4
4.1.7 Resistance to cleaning and disinfecting agents.....	5
4.1.8 Replacement components and accessories.....	5
4.1.9 Helmet mass.....	5
4.1.10 Shell conspicuity.....	5
4.1.11 Retro-reflective material.....	5
4.1.12 Neck protector and ear covers.....	5
4.1.13 Shikoro.....	6
4.2 Samples, helmet adjustment and pre-conditioning.....	6
4.2.1 Samples.....	6
4.2.2 Helmet adjustment.....	6
4.3 Pre-conditioning.....	6
4.3.1 Thermal shock.....	6
4.3.2 Water soak.....	7
4.3.3 “Thermal plus”.....	7
4.3.4 “Thermal minus”.....	7
4.3.5 Pre-treatment and pre-conditioning for fabrics.....	7
4.4 Performance requirements.....	12
4.4.1 Requirement table.....	12
4.4.2 Mechanical performances.....	13
4.4.3 Thermal performances.....	14
4.4.4 Others.....	16
4.5 Test methods.....	17
4.5.1 Force impact resistance.....	17
4.5.2 Impact energy attenuation (optional).....	17
4.5.3 Penetration resistance.....	18
4.5.4 Lateral crushing.....	18
4.5.5 Retention system strength.....	18
4.5.6 Retention system effectiveness.....	19
4.5.7 Flame resistance.....	19
4.5.8 Flame engulfment (optional).....	22
4.5.9 Radiant heat resistance.....	22
4.5.10 Convective heat resistance.....	23
4.5.11 Thermal protective performance for neck protector and/or ear covers or Shikoro.....	23
4.5.12 Protection against molten metals.....	23
4.5.13 Tests for electrical insulation.....	23
4.5.14 Test for resistance to liquid chemical.....	24
4.5.15 Hardware corrosion resistance.....	24
4.5.16 Optical properties measurements for oculars.....	25
4.5.17 Scratch resistance test to oculars.....	25
4.5.18 Resistance to fogging test to oculars.....	25
4.5.19 High speed particle impact resistance test to oculars.....	25

5 **Marking**.....25

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO/FDIS 11999-5](https://standards.itih.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5)

<https://standards.itih.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 94, *Personal safety — Protective clothing and equipment*, Subcommittee SC 14, *Fire-fighters' personal equipment*.

This second edition cancels and replaces the first edition (ISO 11999-5:2015), which has been technically revised.

The main changes are as follows:

— editorial changes throughout the document.

A list of all parts in the ISO 11999 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Figures are reproduced from AS/NZS 4067:2012 and AS/NZS 2512.1:2009, with permission from Standards Australia. ISO has no responsibility and context in which are extracts are reproduced, nor is ISO in anyway responsible for the other content or accuracy therein.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/FDIS 11999-5](https://standards.iteh.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5)

<https://standards.iteh.ai/catalog/standards/iso/6872a62c-4689-4073-abc3-d04e3f9543c8/iso-fdis-11999-5>

PPE for firefighters — Test methods and requirements for PPE used by firefighters who are at risk of exposure to high levels of heat and/or flame while fighting fires occurring in structures —

Part 5: Helmets

1 Scope

This document specifies the minimum design and performance requirements for helmets as part of personal protective equipment (PPE) to be used by firefighters, primarily but not solely to protect against impact and exposure to flame and high thermal loads.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3146, *Plastics — Determination of melting behaviour (melting temperature or melting range) of semi-crystalline polymers by capillary tube and polarizing-microscope methods*

ISO 6330, *Textiles — Domestic washing and drying procedures for textile testing*

ISO 6942:2022, *Protective clothing — Protection against heat and fire — Method of test: Evaluation of materials and material assemblies when exposed to a source of radiant heat*

ISO 9151, *Protective clothing against heat and flame — Determination of heat transmission on exposure to flame*

ISO 9185:2007, *Protective clothing — Assessment of resistance of materials to molten metal splash*

ISO 11612:2015, *Protective clothing — Clothing to protect against heat and flame — Minimum performance requirements*

ISO 11999-3, *PPE for firefighters — Test methods and requirements for PPE used by firefighters who are at risk of exposure to high levels of heat and/or flame while fighting fires occurring in structures — Part 3: Clothing*

ISO 11999-9, *PPE for firefighters — Test methods and requirements for PPE used by firefighters who are at risk of exposure to high levels of heat and/or flame while fighting fires occurring in structures — Part 9: Firehoods*

ISO 13688:2013 + ISO 13688:2013/Amd.1:2021, *Protective clothing — General requirements*

ISO 15025, *Protective clothing — Protection against flame — Method of test for limited flame spread*

ISO 17492, *Clothing for protection against heat and flame — Determination of heat transmission on exposure to both flame and radiant heat*

ISO 17493, *Clothing and equipment for protection against heat — Test method for convective heat resistance using a hot air circulating oven*

ISO/TR 19591, *Personal protective equipment for firefighters — Standard terms and definitions*

EN 136:1998, *Respiratory protective devices - Full face masks*

EN 137:2006, *Respiratory protective devices. Self-contained open-circuit compressed air breathing apparatus with full facemask. Requirements, testing, marking*

EN 167:2001, *Personal eye protection — Optical test methods*

EN 168:2001, *Personal eye protection — Non-optical test methods*

EN 172:1994 + A1:2000, *Personal eye protection — Sunglare filters for industrial use*

EN 960, *Headforms for use in the testing of protective helmets*

EN 13087-1:2012, *Protective helmets — Test methods — Part 1: Conditions and conditioning*

EN 13087-2:2012, *Protective helmets — Test methods — Part 2: Shock absorption*

EN 13087-4, *Protective helmets — Test methods — Part 4: Retention system effectiveness*

EN 13087-5:2012, *Protective helmets — Test methods — Part 5: Retention system strength*

EN 13087-6, *Protective helmets — Test methods — Part 6: Field of vision*

EN 13087-8:2000, *Protective helmets — Test methods — Part 8: Electrical properties*

EN 13087-10, *Protective helmet — Test methods — Part 10: Resistance to radiant heat*

NFPA 1971:2018, *Standard on Protective Ensembles for Structural Fire Fighting and Proximity Fire Fighting*

CIE 54.2, *Retroreflection – Definition and measurement*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/TR 19591 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Helmet requirements

4.1 General

Helmets shall consist of at least the following assembled components:

- a) Shell (at the minimum area above the A-A' line as per [Figure 1](#)).
- b) Energy absorbing system.
- c) Retention system. The retention system shall include a chinstrap having a minimum width of 19 mm, quick release buckle, and size adjustment mechanism.
- d) Neck protector and/or ear covers, or Shikoro.
- e) Face shield or goggles or both —
 - where a face shield is selected, the face shield shall be attached to and tested with the helmet;
 - where goggles are selected, the goggles shall be permitted to be removed from the helmet before it is tested. This only applies to those which are removable. Where they are attached to the helmet, they shall be tested with the helmet.

f) Retro-reflective material.

4.1.1 Fit

The fit of the helmet shall be adjustable laterally and/or vertically to improve the wearing comfort and the helmet efficiency. This adjustment shall be easily done by the wearer without the use of tools. It should be possible for the wearer to remove the helmet by loosening the chinstraps, using one hand wearing a structural firefighting glove.

When this adjustment covers several sizes of head circumference, the relevant instructions shall be given in the information supplied by the manufacturer.

4.1.2 Protrusions and sharp edges

There shall be no sharp edges, roughness, or projection on any part of the helmet. Projections intruding more than 5 mm from the shell interior surface and above the test line, shall not be acceptable unless covered by protective padding or impact liner. Projections above the test line shall be impacted directly over the position of the said projection in accordance with [4.4.2.1](#), and the testing laboratory shall assess that the projection did not make contact with the head form.

Rigid internal projections below the test line and above the reference plane shall not be able to touch the head of the wearer when the helmet is normally affixed to the head.

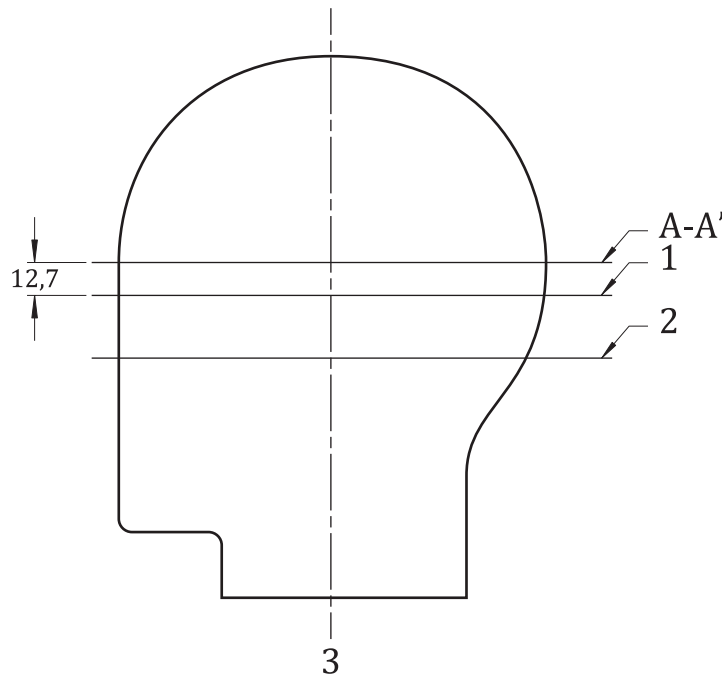
The profile at the front of the helmet shall not prevent the wearing of spectacles or goggles as specified by the helmet manufacturer.

4.1.3 Reinforcement

The shell construction shall be uniformly reinforced. This does not exclude a gradual increase of the shell's thickness or of the grooves or fixation devices of the harness or of the accessories, but it does exclude every other localized reinforcement.

4.1.4 Protected area

When adjusted on the head form as in [4.2.2](#), the helmet shall at the minimum covers the entire area 12,7 mm above the reference plane (see line A -A' in [Figure 1](#)).

**Key**

- 1 reference plane
- 2 basic plane
- 3 central vertical axis

Figure 1 — Protected area (Image taken from AS/NZS 2512.1:2009)

4.1.5 Field of vision

When the helmet is tested in accordance with EN 13087-6, with any attached face shield or goggle in both the stowed and deployed positions, the wearer's field of vision shall correspond to the following angles:

- a) A dihedral angle of at least 105° measured horizontally between L and K on each side of the sagittal plane which passes through the point L (see [Figure 2](#)). Remove the neck protector or Shikoro, if necessary.
- b) An upper dihedral angle greater than 7° above the reference plane and which is defined by the straight line passing through L1, L2 (see [Figure 2](#)).
- c) A lower dihedral angle greater than 45° under the basic plane and which is defined by the straight line passing through K1 K2 situated on the surface of the head form as 31 mm on each side of the point K (see [Figure 2](#)).
- d) With face shield or goggles in the stowed position, the helmet shall provide peripheral vision clearance of at least 94° to each side.

NOTE "Stowed position" means to be placed in "out of use" position when it is not providing the designed protection.

4.1.6 Material innocuousness

Materials used in helmets that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health. They shall meet the requirements as detailed in ISO 13688:2013, 4.2.

4.1.7 Resistance to cleaning and disinfecting agents

All helmet materials shall be unimpaired after cleaning and disinfection by the agents and procedures specified in the information provided by the manufacturer. Such agents shall not be known to be likely to cause irritation or any other adverse effect to the health of the wearer.

4.1.8 Replacement components and accessories

The fitting and/or replacement of any interchangeable parts or accessories shall not impair the function and/or safety of the helmet. All accessories and their respective replacement procedures shall be given in the information supplied by the manufacturer. No openings shall penetrate the helmet shell other than those provided by the manufacturer for mounting energy absorbing systems, retention systems or accessories.

Face shields shall not be considered as accessories and along with neck protectors shall be considered as fixed components of the helmet assembly.

4.1.9 Helmet mass

If helmet mass, excluding non-permanently fitted accessory parts, exceed 1 500 g it shall be marked on the helmet visible to users.

4.1.10 Shell conspicuity

The helmet shell shall have retro-reflective markings in accordance with [4.1.11](#) adhered to the shell exterior. A minimum of 26 cm² of the markings shall be visible when the helmet is viewed from any angle at the reference plane (see Key 2 on [Figure 1](#)). A material which combines both the fluorescent and retro-reflective properties may be used. Care should be exercised when selecting marking materials to ensure they will not degrade the helmet shell.

4.1.11 Retro-reflective material

The material shall have a coefficient of luminous intensity per square meter (CIL/m²) of not less than 100 cd·lux⁻¹·m⁻² when measured in accordance with CIE 54.2 with an observation angle of 0,2° and entrance angle of -4°.

4.1.12 Neck protector and ear covers

Neck protector and/or ear covers shall cover the wearer's neck and ears and shall provide at least the following area of coverage as described below.

The helmet with neck protector and ear cover shall be donned in the proper wearing position as specified by the manufacturer on an EN 960 head form 575 according to its helmet positioning index. The helmet positioning index shall be the vertical distance, as specified by the manufacturer, from the lowest point of the brow at the lateral midpoint of the helmet to the basic plane of the EN 960 head form 575 with the helmet firmly positioned on the head form. See [Figure 4](#).

In this position, the neck coverage shall be measured downward from the reference plane to the lower edge of the neck coverage:

- a) 95 mm measured 50 mm forward of the coronal plane;
- b) 120 mm measured 25 mm forward of the coronal plane;
- c) 130 mm measured at the coronal plane;
- d) 130 mm measured at the midsagittal plane at the rear of the head form.