

INTERNATIONAL STANDARD

AMENDMENT 1

**Information technology – Generic cabling for customer premises –
Part 3: Industrial premises**

(standards.itech.ai)

[ISO/IEC 11801-3:2017/Amd 1:2021](https://standards.itech.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021)

<https://standards.itech.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

ISO/IEC 11801-3:2017/Amd 1:2021
<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>



ISO/IEC 11801-3

Edition 1.0 2021-04

INTERNATIONAL STANDARD

AMENDMENT 1

Information technology – Generic cabling for customer premises –
Part 3: Industrial premises

STANDARD PREVIEW
(standards.iteh.ai)
ISO/IEC 11801-3:2017/Amd 1:2021
<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-9477-2

Warning! Make sure that you obtained this publication from an authorized distributor.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 3: Industrial premises

AMENDMENT 1

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
- 3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this document.
- 7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees, and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
- 8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC document may be the subject of patent rights. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO/IEC 11801-3 has been prepared by subcommittee SC 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

The text of this Amendment is based on the following documents:

FDIS	Report on voting
JTC1-SC25/2995/FDIS	JTC1-SC25/3009/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Amendment is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, available at www.iec.ch/members_experts/refdocs.

INTRODUCTION TO THE AMENDMENT

This document contains requirements and/or recommendations for deployment of single pair balanced cabling on the industrial cabling specified in ISO/IEC 11801-3:2017.

This document also includes end-to-end link requirements for Class D, E and E_A.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 11801-3:2017/Amd 1:2021](https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021)
<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>

INTRODUCTION

Add the following NOTE below the Figure 1 title:

NOTE Telecommunications infrastructure affects raw material consumption. The infrastructure design and installation methods also influence product life and sustainability of electronic equipment life cycling. These aspects of telecommunications infrastructure impact our environment. Since building life cycles are typically planned for decades, technological electronic equipment upgrades are necessary. The telecommunications infrastructure design and installation process magnifies the need for sustainable infrastructures with respect to building life, electronic equipment life cycling and considerations of effects on environmental waste. Telecommunications designers are encouraged to research local building practices for a sustainable environment and conservation of fossil fuels as part of the design process.

2 Normative references

Add the following normative references:

IEC 63171-6, *Connectors for electrical and electronic equipment – Part 6: Detail specification for 2-way and 4-way (data/power), shielded, free and fixed connectors for power and data transmission with frequencies up to 600 MHz*

IEC 61156-11, *Multicore and symmetrical pair/quad cables for digital communications – Part 11: Symmetrical single pair cables with transmission characteristics up to 600 MHz – Horizontal floor wiring – Sectional specification*

IEC 61156-12¹, *Multicore and symmetrical pair/quad cables for digital communications – Part 12: Symmetrical single pair cables with transmission characteristics up to 600 MHz – Work area wiring*

<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>

Replace the ISO/IEC 14763-4 reference with the following new reference:

ISO/IEC 14763-4, *Information technology – Implementation and operation of customer premises cabling – Part 4: Measurement of end-to-end (E2E) links, modular plug terminated links (MPTL) and direct attach cabling*

3 Terms, definitions, abbreviated terms and symbols

3.1 Terms and definitions

Add the following terms and definitions at the end of the list:

3.1.14

balanced 1-pair cabling channel

transmission path between equipment constructed from balanced 1-pair cables, balanced 1-pair connectors and balanced 1-pair cable assemblies to facilitate signal and power delivery

3.1.15

edge distributor

optional additional distributor to accommodate active equipment to allow transition from balanced 4-pair cabling to balanced 1-pair cabling

¹ Under preparation. Stage at time of publication: IEC CDV 61156-12:2020.

3.1.16

end-to-end link

transmission path between equipment including the end connections attached to the equipment

3.1.17

bulkhead connection

connection that serves as an interconnection point located through an enclosure wall

3.1.18

segment

cabling between connectors of an end-to-end link

3.2 Abbreviated terms

Add the following abbreviated terms at the end of the list:

B bulkhead connection

C connection

CP consolidation point

ED edge distributor

ffs for further study

L1 length of end-to-end link

SPE Single Pair Ethernet


TI test interface

3.3 Symbols

ISO/IEC 11801-3:2017/Amd 1:2021

Replace subclause 3.3 with the following:
<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>

Symbols used identically in different parts of ISO/IEC 11801 are defined in ISO/IEC 11801-1:2017, 3.3.

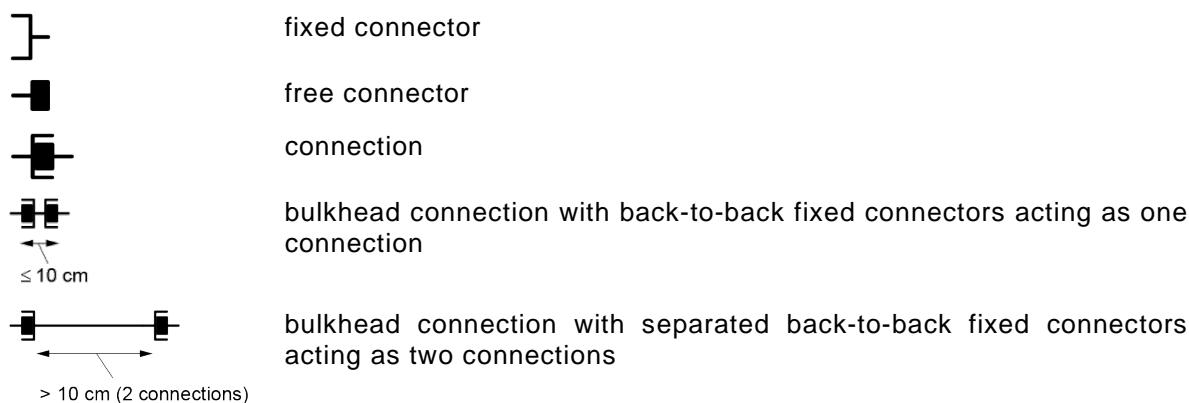

The symbols shown in Figure 14 define the number of connections in all end-to-end links.



Figure 14 – Symbols for bulkhead connections

NOTE Bulkhead mounted connections with fixed cable can have a variable length to accommodate the installation within the cabinet.

4 Conformance

Add the following list items:

- f) in case balanced 1-pair cabling channels are installed between the IID or ED and the NI of an Automation Island, between the IID or ED and the TO or AO, or between the IID and ED, channels shall conform to the requirements of Annex A;
- g) in case balanced 1-pair cabling channels are installed between the ID and the NI of an Automation Island, channels shall conform to the requirements of Annex E.

5.3.1 General structure

Replace list item a) with the following:

- a) Annex A describes the combined cabling structure of generic and industrial cabling system to connect several AIs via an ID to support critical process control, monitoring and automation data (PCMA).

5.3.3 Floor cabling subsystem

Replace list item b) with the following:

- b) the mechanical termination of the floor cables including the connecting hardware (e.g. of interconnect or cross-connect) at the FD together with associated patch cords and/or jumpers, and any passive connections to the IDs.

5.6.2 Channels and permanent links

Add the following new paragraph after the first paragraph of 5.6.2:

The transmission performance of balanced 1-pair cabling between specific test interfaces is detailed in Annex E for channels.

5.7.2 Distributors

Replace the existing Table 1 with the following new table:

Table 1 – Link lengths equations

Channel	Length m
Intermediate ^a	40
Intermediate	100
Intermediate ^b	1 000
Intermediate + horizontal + building backbone + campus backbone	10 000
NOTE In some implementations of the intermediate cabling subsystem in Clause 8, the ID might not support TOs up to the maximum distance shown.	
^a for 40 m balanced 1-pair cabling	
^b for 1 000 m balanced 1-pair cabling	

5.7.6 Telecommunications outlet

Add the following to item c) after the second bullet point:

or

- 1-pair of a 1-pair balanced cable;

6.1 General

Delete the sixth and seventh paragraphs.

In the paragraph immediately following Figure 10, delete the word "only".

6.3.2.3 Intermediate cabling

Add the following new paragraphs after the first paragraph:

Generic balanced 1-pair cabling shall comply with the channel performance as required by Annex C and ISO/IEC 11801-1.

For the applications specified in Annex E, 1-pair cabling shall comply with the channel performance as required by Annex C and Annex E.

6.3.2.4 Cable sharing

Add the following new paragraph after the first paragraph:

In the case of cable sharing by using balanced 1-pair cabling channels, additional requirements shall be taken into account for balanced cabling in accordance with ISO/IEC 11801-1 and ISO/IEC TR 11801-9906:2020 Annex D.

7.2 Balanced cabling

Add the following new paragraphs after the first paragraph:

Generic balanced 1-pair cabling shall comply with the link performance as required by Annex C and ISO/IEC 11801-1.

For the applications specified in Annex E, 1-pair cabling shall comply with the link performance as required by Annex C and Annex E.

8.1 General

Add the following after "Clause 6" at the end of the second sentence:

" or performance requirements of Annex E in case balanced 1-pair cabling is installed."

8.2.1 General

Add the following new sentence after the first sentence:

In the case of already installed balanced 1-pair cabling channels for up to 1 000 m the performance shall be ensured.

8.2.2.1 Component choice

Add the following at the end of the subclause:

Using the configurations of 8.2.2.3,

- cables in accordance with IEC 61156-11 and IEC 61156-12 and connectors in accordance with IEC 63171-6 provide cabling performance to the 600 MHz 40 m balanced 1-pair channel of Annex E;

NOTE Cables in accordance with two future parts of IEC 61156 (IEC 61156-13 and IEC 61156-14) and connectors in accordance with IEC 63171-6 will provide cabling performance to the 20 MHz 1 000 m balanced 1-pair channel of Annex E.

Add the following new subclause after 8.2.2.2:

8.2.2.3 Balanced 1-pair cabling dimensions

Figure 15a) shows a 40 m balanced 1-pair channel (40 m interconnect – TO model). Figure 15b) shows a 1 000 m balanced 1-pair channel (1 000 m interconnect – TO model).

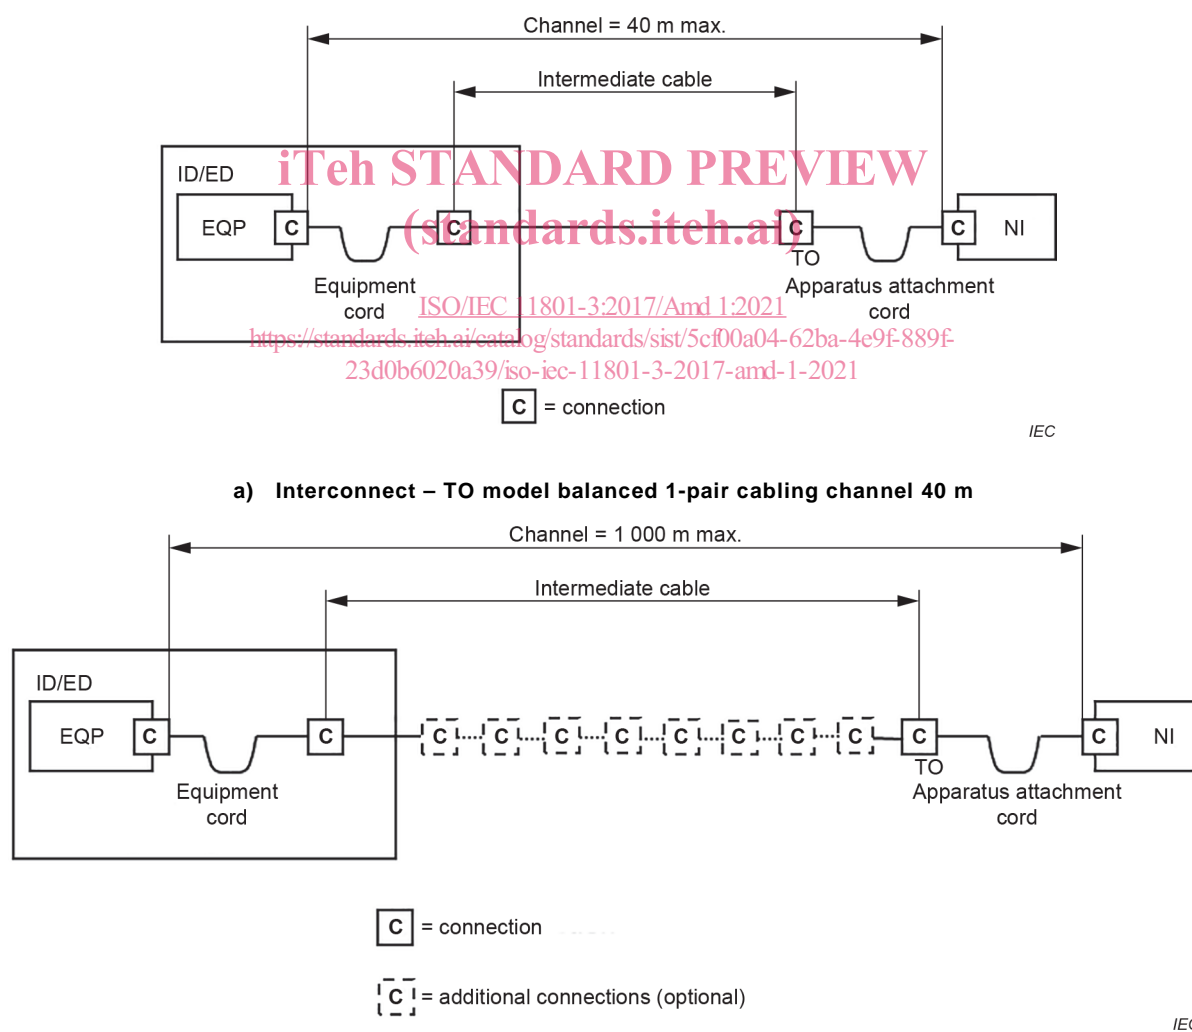


Table 5 and Table 6 contain the length assumptions of the 40 m and the 1 000 m, respectively, balanced 1-pair intermediate cabling.

**Table 5 – Length assumptions used in mathematical modelling
of the 40 m balanced 1-pair intermediate cabling**

Segment	Length m	
	minimum	maximum
ID – TO (no CP) ^a	5	34
Apparatus attachment cord	1	3
Equipment cord	1	3
All cords	–	6
^a Either consists of 34 m cabling and two 3 m cords or can be an end-to-end link configuration (but end-to-end links do not include a TO).		

**Table 6 – Length assumptions used in mathematical modelling
of the 1 000 m balanced 1-pair intermediate cabling**

Segment	Length m	
	minimum	maximum
ID – TO (no CP) ^a	15	990
Apparatus attachment cord	1	5
Equipment cord	1	5
All cords	–	10
^a Allows up to two 5 m cords.		

ISO/IEC 11801-3:2017/Amd 1:2021
<https://standards.iteh.ai/catalog/standards/sist/5cf00a04-62ba-4e9f-889f-23d0b6020a39/iso-iec-11801-3-2017-amd-1-2021>

In order to accommodate cables used for apparatus attachment cords, patch cords, jumpers and equipment cords with different insertion loss, the length of the cables used within a channel shall be determined by the equations shown in Table 7.

Table 7 – Balanced 1-pair intermediate link length equations

Model	Figure	Implementation equation	
		new T1 class for 600 MHz 40 m channel	new T1 class for 20 MHz 1 000 m channel
Interconnect – TO (1-pair, 40 m)	15a	ffs	not applicable
Interconnect – TO (1-pair, 1 000 m)	15b	not applicable	ffs
l_i maximum length of the intermediate cable (m)			
l_a combined length of patch cords/jumpers, equipment and apparatus attachment cords (m)			
X ratio of cord cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m)			
For operating temperatures above 20 °C, l_i should be reduced by 0,2 % per °C for screened cables; 0,4 % per °C (20 °C to 40 °C) and 0,6 % per °C (> 40 °C to 60 °C) for unscreened cables.			

9.2 Balanced cables

Add the following new sentence and NOTE after the first sentence:

For balanced 1-pair cables with transmission characteristics up to 600 MHz, see IEC 61156-11 and IEC 61156-12.

NOTE Future parts of IEC 61156 (IEC 61156-13 and IEC 61156-14) will specify requirements for balanced 1-pair cables with transmission characteristics up to 20 MHz.

Add the following new subclause after 10.2.2.3.

10.2.2.4 Connecting hardware at the TO using balanced 1-pair cable at the TO

Where balanced 1-pair cabling is installed, connecting hardware meeting the mechanical and physical requirements of IEC 63171-6 shall be used.

For connecting hardware in $M_1I_1C_1E_1$ installation environments within industrial premises, refer to ISO/IEC 11801-1.

11.2.1 General

Add the following NOTE after the first paragraph:

NOTE Requirements for balanced 1-pair cabling will be given in a future Amendment 1 to ISO/IEC 11801-1:2017.

A.2 Industrial intermediate cabling subsystem

Add a new item e) to the list:

e) the ED – optional.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Replace Figure A.2 with the following new figure:

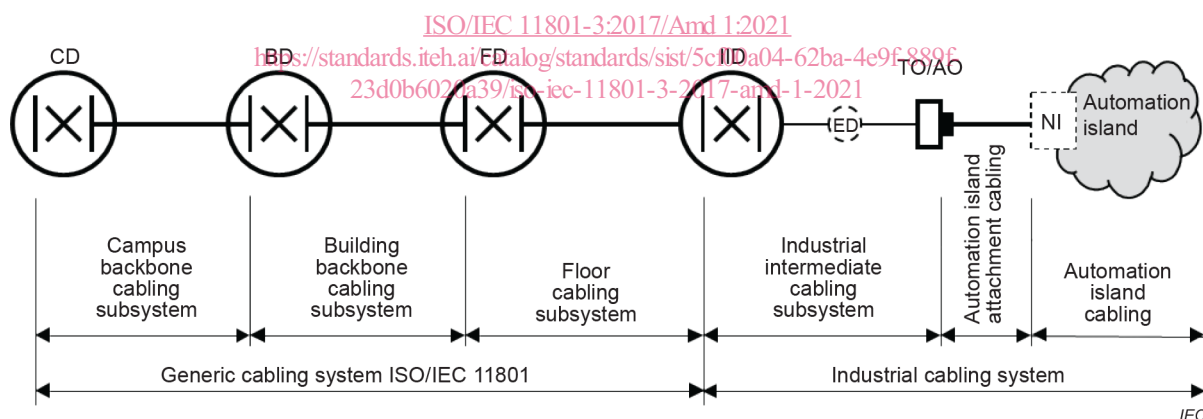


Figure A.2 – Combined structure of generic and industrial cabling system using an IID with optional ED

At the end of the paragraph after Figure A.2, add the following new sentence:

The industrial intermediate cabling may include an edge distributor (ED) to accommodate active equipment to allow transition from balanced 4-pair cabling to balanced 1-pair cabling.

Annex B (normative) Additional reference implementations

B.2.2 Channels with no connections

Replace list item a) with the following new item:

a) an intermediate cabling channel created without intermediate connections,