
**Intelligent transport systems —
Manoeuvring aids for low-speed
operation (MALSO) — Performance
requirements and test procedures**

*Systèmes de transport intelligents — Aides à la conduite pour
manœuvre à vitesse réduite (MALSO) — Exigences de performance et
procédures d'essai*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 17386:2023

<https://standards.iteh.ai/catalog/standards/sist/d8ea9318-dd42-409c-92c2-626921ace294/iso-17386-2023>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 17386:2023

<https://standards.iteh.ai/catalog/standards/sist/d8ea9318-dd42-409c-92c2-626921ace294/iso-17386-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification	4
5 Functional and performance requirements	4
5.1 System activation.....	4
5.1.1 Systems with manual activation.....	4
5.1.2 Systems with automatic activation.....	5
5.2 Driver interface and information strategy.....	5
5.2.1 General information presentation.....	5
5.2.2 Audible information.....	5
5.2.3 Visual information.....	6
5.2.4 Combination of visual and audible information.....	7
5.2.5 Duration of signalling.....	7
5.3 Dynamic performance of object detection.....	7
5.3.1 Relative velocity of objects.....	7
5.3.2 Start-up detection delay.....	7
5.3.3 Detection latency.....	8
5.4 Monitoring range coverage.....	8
5.4.1 Sections of the monitoring range.....	8
5.4.2 Horizontal areas of relevance.....	8
5.4.3 Rear horizontal area.....	9
5.4.4 Front horizontal area.....	10
5.4.5 Corner horizontal areas.....	12
5.4.6 Minimum coverage ratios.....	13
5.4.7 Vertical areas of relevance.....	13
5.5 Self-test capabilities and failure indication.....	14
5.6 Operation with trailers.....	14
5.6.1 Trailer hitch handling.....	14
5.6.2 System operation with trailer.....	15
6 Requirements and tests components	15
7 Operational test of obstacle detection	15
7.1 Test object.....	15
7.1.1 Standard test object definition.....	15
7.1.2 Ultrasonic-based systems.....	15
7.1.3 Radar-based systems.....	16
7.2 General ambient conditions.....	16
7.3 Test procedure.....	16
7.3.1 Test setup.....	16
7.3.2 Test 1 — Coverage of horizontal areas of relevance.....	17
7.3.3 Test 2 — Coverage of vertical areas of relevance.....	17
Annex A (informative) Test methods	18
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

This third edition cancels and replaces the second edition (ISO 17386:2010), which has been technically revised.

The main changes are as follows:

- requirements updated according to state-of-the-art systems regarding detection characteristic;
- test method for detection latency added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Today's aerodynamically-shaped vehicles often result in restricted rear and front visibility. Manoeuvring Aids for Low Speed Operation (MALSO) enhance security and driver convenience during parking or manoeuvring situations at very low speed, e.g. squeezing into small parking spaces or through narrow passages. Drivers can avoid collisions with obstacles that cannot be seen but can be detected by the system and they can make more effective use of limited parking space.

MALSO systems are detection devices with non-contact sensors which assist the driver during low-speed manoeuvring. MALSO systems indicate to the driver the presence of front, rear or corner objects. They are regarded as an aid to drivers for use at speeds of up to 0,5 m/s, and they do not relieve drivers of their responsibility when driving the vehicle.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 17386:2023](https://standards.iteh.ai/catalog/standards/sist/d8ea9318-dd42-409c-92c2-626921ace294/iso-17386-2023)

<https://standards.iteh.ai/catalog/standards/sist/d8ea9318-dd42-409c-92c2-626921ace294/iso-17386-2023>

Intelligent transport systems — Manoeuvring aids for low-speed operation (MALSO) — Performance requirements and test procedures

1 Scope

This document addresses light-duty vehicles, such as passenger cars, pick-up trucks, light vans and sport utility vehicles (motorcycles excluded) equipped with Manoeuvring Aids for Low Speed Operation (MALSO) systems. It specifies the minimum functionality requirements which the driver can generally expect of the device, i.e. detection of and information on the presence of relevant obstacles within a defined (short) detection range. It defines minimum requirements for failure indication as well as performance test procedures; it includes rules for the general information strategy but does not restrict the kind of information or display system.

MALSO systems use object-detection devices (sensors) for ranging in order to provide the driver with information based on the distance to obstacles. Although sensing technology is not addressed in this document, technology does affect the performance-test procedures set up in [Clause 7](#). The current test objects are defined based on systems using ultrasonic sensors, which reflect the most commonly used technology at the time of publication. For other sensing technologies which will potentially emerge in the future, these test objects shall be checked and changed if required.

Visibility-enhancement systems like video-camera aids without distance ranging and warning are not covered by this document.

Reversing aids and obstacle-detection devices on heavy commercial vehicles are not addressed by this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2575, *Road vehicles — Symbols for controls, indicators and tell-tales*

ISO 15006, *Road vehicles — Ergonomic aspects of transport information and control systems — Specifications for in-vehicle auditory presentation*

ISO 15008, *Road vehicles — Ergonomic aspects of transport information and control systems — Specifications and test procedures for in-vehicle visual presentation*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

**3.1
audible warning and information**

acoustical signal that is used to present information about relevant obstacles to the driver

EXAMPLE Pulses, speech.

Note 1 to entry: Acoustical pulses can be coded mainly by carrier frequency, repetition rate and position of sound generator.

Note 2 to entry: See [Figure 1](#).

**3.2
evaluation for warning and advice**

information about detected obstacles that, when the system is activated, is evaluated to warn and advise the driver in order to help with the current low speed manoeuvre

Note 1 to entry: See [Figure 1](#).

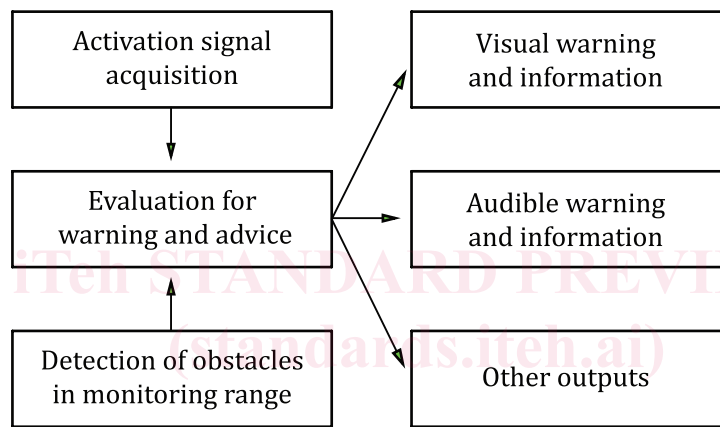


Figure 1 — Block diagram of the potential sub-functions of a manoeuvring aid for low speed operation

**3.3
manoeuvring aid for low-speed operation
MALSO**


system that, at low speeds (< 0,5 m/s), is capable of informing the driver of the presence of stationary obstacles in particular areas in close proximity to the subject vehicle, mainly during parking and manoeuvring in narrow passages

**3.4
monitoring range**

specific three-dimensional space around the vehicle, which is divided into rear and front corner monitoring range, front, rear-1 and rear-2 monitoring range

Note 1 to entry: The covered monitoring ranges depend on the intended use of the system (see [Clause 4](#)).

Note 2 to entry: See [Figure 2](#).

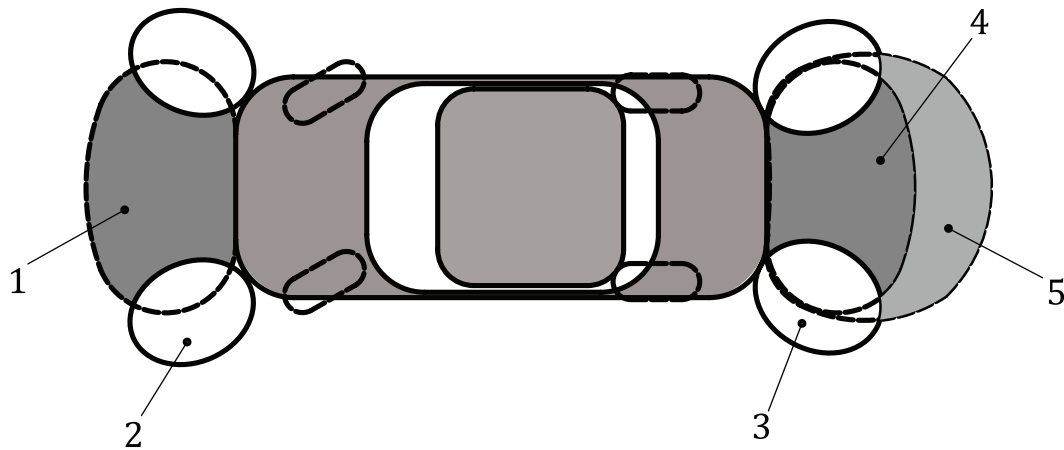**Key**

- 1 front
- 2 front corner
- 3 rear corner
- 4 rear-1
- 5 rear-2

Figure 2 — Monitoring ranges (plan view)

3.5 reversing detection system

system that gives an indication to the driver, when the reverse gear is selected, whether there are objects in the monitoring range

3.6 sensor

component that detects objects in the monitoring range

Note 1 to entry: There are a variety of sensor principles which can be used. The most common principle is the flight time measurement (e.g. radar, lidar, sonar). Active sensor elements create a pulsed or continuously modulated field of microwaves, (infrared) light or ultrasonic sound. The reflected energy due to an object in the detection area is received, and the distance to the object is measured. The lateral position of the object is estimated based on the beam or field directional characteristics, or based on the timing relationships between sensors with overlapping coverage areas. Alternative principles include distance measurement by triangulation principle and passive sensor systems using image processing.

3.7 system activation

action of transitioning the system operation from a quiescent mode to an active one in which the system is monitoring the monitoring ranges, evaluating the objects detected and generating appropriate feedback to assist the driver

3.8 test object

object with a specific material, geometry and surface for testing the monitoring range

Note 1 to entry: This test object should give comparable results for the relevant sensor types.

3.9 visual information and warning

optical signal which is used to present information about relevant obstacles to the driver

EXAMPLE Telltale, display.

Note 1 to entry: Visual information can be coded, for example, by colour, repetition rate, symbols or text. The driver can be warned by continuous or pulsating signalling of possibly coloured telltales. Information can be graphical or alphanumeric.

3.10 warning levels

progressive critical levels of audible/visual/tactile/kinaesthetic information or feedback to the driver regarding the hazard environment

4 Classification

The MALSO system classification reflects the diversity of driving behaviour and market demand in different regions of the world. For example, in certain countries, drivers manoeuvre within a very tight area and have come to rely on warnings given at very short range. In other regions, drivers expect warnings to be given at a relatively longer range. A manufacturer may select the most suitable system parameters based on the driving style and expectations of the target driver population.

The Manoeuvring Aids for Low Speed Operation are classified according to their capability of covering the different monitoring ranges. Each monitoring range corresponds to a particular part of the vehicle boundary to prevent colliding with an obstacle. See [Figure 2](#). The class of the system is indicated by an abbreviation corresponding to the monitoring ranges covered.

Table 1 — Classification of Manoeuvring Aids for Low Speed Operation — Abbreviations of monitoring ranges

Monitoring range	Abbreviation	Detection distance m	Maximum driving speed m/s
Rear-1	R1	0,6	0,3
Rear-2	R2	1,0	0,5
Rear corner driver side	Rcd	0,5	0,3
Rear corner passenger side	Rcp	0,5	0,3
Front	F	0,6	0,3
Front corner driver side	Fcd	0,5	0,3
Front corner passenger side	Fcp	0,5	0,3

Any combination of monitoring ranges may be used if it is beneficial for the intended use of the system.

The corner type systems have monitoring ranges restricted to particular corners of the vehicle and are mainly intended to assist the driver while driving through narrow passages.

For convenience and most efficient use of the manoeuvring aid, the driver shall be informed about the type of system the vehicle is equipped with, according to the classification above.

5 Functional and performance requirements

5.1 System activation

5.1.1 Systems with manual activation

The system is turned on and off by the driver with a switch or push-button. After activation, the system may indicate readiness for service acoustically or visually. This indication shall be clearly distinguishable from distance information about obstacles.

5.1.2 Systems with automatic activation

The system is activated/deactivated automatically according to the driving situation. The possible monitoring ranges (see [Clause 4](#)) may be activated separately in order to avoid nuisance signals. After automatic activation, readiness for service may be indicated to the driver. There may be an on/off switch or push-button to override automatic (de)activation.

Recommended activation and deactivation criteria are the gear selection (reverse/forward), the vehicle speed, v , and the travelled distance, x , since system activation as described in [Table 2](#). Further criteria may be used by the OEM to improve comfort or safety of the system. The system shall be activated according to [Table 2](#) if the vehicle speed, v , is greater than zero. In the case that the vehicle speed, v , equals zero, application of [Table 2](#) is up to the manufacturers.

The vehicle speed v_{on} for activation and v_{off} for deactivation shall be $\geq 0,5$ m/s or $0,3$ m/s, depending on the monitoring range under consideration (see [Table 1](#), maximum driving speed).

Table 2 — System activation/deactivation criteria

Monitoring range	Reverse gear selected	Gear other than reverse is selected	
		$v < v_{on}$	$v \geq v_{off}$ OR $x > x_{off}$
Front	o	+	-
Front corners	o	+	-
Rear	+	o	-
Rear corners	+	o	-
"o" indicates optional "+" indicates active "-" indicates inactive			

On vehicles with automatic transmission, the MALSO system may be deactivated if the P (parking) gear position is selected. It is also possible to deactivate the system while the parking brake is engaged.

5.2 Driver interface and information strategy

5.2.1 General information presentation

For the driver interface, at least the audible information channel shall be used. Visual information and warning may be used as a supplement. A standardized information strategy will be the basis for the development of both types of information components, as this makes the use in different vehicles easier and safer. The most relevant information for the driver is the distance, i.e. the clearance, between the vehicle boundary and an obstacle. The location of the obstacle relative to the vehicle may be indicated as additional information.

Failures shall also be indicated to the driver.

A general information strategy cannot be established because of the following reasons:

- there are many different ways of coding the information;
- each car manufacturer will integrate the manoeuvring aids into its driver-information system with its specific driver interface.

[Subclauses 5.2.2](#) to [5.2.5](#) may be regarded as guidance in the implementation of an information strategy.

5.2.2 Audible information

The audible information shall be presented in accordance with ISO 15006.