



Designation: **F1818—04 F1818 – 13**

Standard Specification for Foot Protection for Chain Saw Users¹

This standard is issued under the fixed designation F1818; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope

1.1 This specification covers minimum requirements for the design, performance, testing, and certification of footwear and foot protective devices designed to provide cut resistance protection to the feet of operators of power chain saws.

1.2 The objective of this specification is to prescribe fit, function, and performance criteria for footwear and foot protective devices, worn by chain saw operators, which are intended to reduce foot injuries caused by contact with a running power saw chain.

1.3 This specification is not intended to serve as a detailed manufacturing or purchasing specification, but can be referenced in purchase contracts to ensure that minimum performance requirements are met.

1.4 Controlled laboratory tests used to determine compliance with the performance requirements of this specification shall not be deemed as establishing performance levels for all situations to which chain saw operators may be exposed.

1.5 Mandatory requirements are indicated by the use of the word shall; recommendations and advisory information is indicated by the use of the word should.

2. Referenced Documents

2.1 *ASTM Standards*:²

F1414 Test Method for Measurement of Cut Resistance to Chain Saw in Lower Body (Legs) Protective Clothing

F1458 Test Method for Measurement of Cut Resistance to Chain Saw of Foot Protective Devices

F1897 Specification for Leg Protection for Chain Saw Users

2.2 *OSHA Standard*:³

29 CFR 1910.266

3. Terminology

3.1 *Definitions*:

3.1.1 *approve*, *v*—to be acceptable to the authority having jurisdiction. [43c9-beb0-182f89c9f633/astm-f1818-13](https://www.astm.org/standards/f1818-13)

3.1.2 *authority having jurisdiction*, *n*— the organization, office, or individual responsible for approving any equipment, installation, or procedure.

¹ This specification is under the jurisdiction of ASTM Committee F23 on Personal Protective Clothing and Equipment and is under the direct responsibility of Subcommittee F23.20 on Physical.

Current edition approved Oct. 1, 2004 Jan. 1, 2013. Published October 2004 January 2013. Originally approved in 1997. Last previous edition approved in 2003 2004 as F1818 – 97 (2003) F1818 - 04. DOI: 10.1520/F1818-04.10.1520/F1818-13.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401.

3.1.2.1 *Discussion*—

The term *authority having jurisdiction* is used in this document in a broad manner since jurisdictions and the responsibilities of approval agencies vary.

3.1.3 *certification*, *n*—a system whereby an organization determines that a manufacturer has demonstrated the ability to make a product that complies with the requirements of the specification, authorizes the manufacturer to use a label on products that comply with the requirements of the specification, and conducts a follow-up program to verify the methods the manufacturer uses to determine compliance with the requirements of this specification.

3.1.4 *certification organization, n*—an independent, third-party organization that determines product compliance with the requirements of the specification with a labeling and listing follow-up program.

3.1.5 *chain saw, n*—a portable power-operated tool used for cutting wood which has cutters linked in a chain.

3.1.6 *chain speed, n*—the velocity of synchronized movement of linked cutters around a guide bar and sprocket.

3.1.7 *chainspeed 50 (CS50), n*—for chain saw protection, the mean velocity at which cut through occurs.

3.1.7.1 *Discussion*—

This value establishes the relationship between the probability of cutting through the chain saw leg protective clothing (or foot protective device) and the speed of the saw chain. For lower chain speeds, the probability of cut through approaches zero, while for higher chain speeds, the probability of cut through approaches one.

3.1.8 *chain stop, n*—for chain saw cut resistance, the resulting action when a material clogs (jams) the drive sprocket or slows the speed sufficiently to prevent advancement of the saw chain.

3.1.9 *cut resistance, n*—in chain saw testing, the ability of a material, while in contact with the linked cutters, to resist cut through of the cutters of a moving saw chain, independent of either jamming or chain stop.

3.1.10 *cut-through, n*—for chain saw cut resistance, the action of a running chain saw after complete breakthrough of either protective garment or protective device.

3.1.11 *follow-up program, n*—the sampling, inspection, tests, or other measures conducted by the certification organization on a periodic basis to determine the continued compliance of products that are being made by the manufacturer to the requirements of the standard specification.

3.1.12 *foot, n*—the terminal part of the vertebrate leg, including the ankle, upon which an individual stands.

3.1.13 *foot protective device, n*—for chain saw cut resistance, an article of personal equipment which covers the foot and ankle for the purpose of providing limited protection from injury due to contact with a moving saw chain.

3.1.14 *footwear, n*—for chain saw cut resistance, a boot or shoe of any construction.

3.1.15 *gaiter, n*—for chain saw cut resistance, a foot protective device permanently attached to the outside of the footwear.

3.1.16 *jamming, n*—for chain saw cut resistance, the clogging action manifested by a protective garment which can produce a chain stop.

3.1.17 *label, v*—for protective clothing, to attach a symbol or other identifying mark, the use of which has been authorized by a certification organization.

3.1.18 *list, v*—for protective clothing, to publish a register of equipment or materials which has been verified by a certification organization as being acceptable and meeting the requirements of standard specifications.

3.1.18.1 *Discussion*—

The means for identifying listed equipment may vary for each organization concerned with product evaluation, some of which do not recognize equipment as listed unless it is also labeled. The authority having jurisdiction should utilize the system employed by the certification organization to identify a listed product.

3.1.19 *protective clothing, n*—an item of clothing that is specifically designed and constructed for the intended purpose of isolating all or part of the body from a potential hazard or isolating the external environment from contamination by the wearer of the clothing.

3.1.19.1 *Discussion*—

For chain saw cut resistant protective clothing the potential hazard is exposure to a running power saw chain.

3.1.20 *saw chain, n*—a closed loop of cutters linked together for use in a portable power-operated tool.

3.1.21 *toe area cut zone*—in the testing of foot protective devices, that area, excluding the sole, that extends from the frontmost part of the footwear, to a vertical plane 15 mm \pm 0.25 mm (0.60 in. \pm 0.01 in.) behind the toe box.

3.1.21.1 *Discussion*—

In the absence of a toe box, the toe area cut zone extends to a vertical plane 65 mm \pm .25 mm (2.60 in. \pm 0.01 in.) from the front of the footwear.

3.1.22 *toe box, n*—in the testing of foot protective devices, a component inserted into the toe area of footwear.

3.1.23 *upper, n—in footwear*, that area of the footwear above the sole.

3.1.24 *upper cut zone, n—in the testing of foot protective devices*, that area which starts near the top of the footwear and extends downward, but excludes the toe area cut zone.

4. Materials and Workmanship

4.1 Footwear and foot protective devices shall be constructed of materials which should remain functional and effective throughout seasonal climatic variations.

4.2 Footwear and foot protective devices shall not impede normal movement or the capability to perform the intended tasks.

4.3 The workmanship in the production and assembly of the footwear or foot protective device shall be such that the protective material is securely attached.

4.4 Footwear and foot protective devices shall be free of defects or imperfections which could detract from their function or performance. All hardware should be free of rough spots, burrs, or sharp edges.

5. Areas of Protection

5.1 Footwear and foot protective devices shall have a minimum area of protection as described in 5.1.1-5.1.3.

5.1.1 *Height of Protection*—The chain saw cut resistance area of the upper test cut zone shall extend downward from a minimum height of 178 mm (7 in.). (See Fig. 1.)

NOTE 1—This height can be measured by using a dowel having 64-mm (2½ in.) diameter and 178 mm (7 in.) length placed at the inside back of the heel of the footwear.

5.1.2 *Width of Protection*:

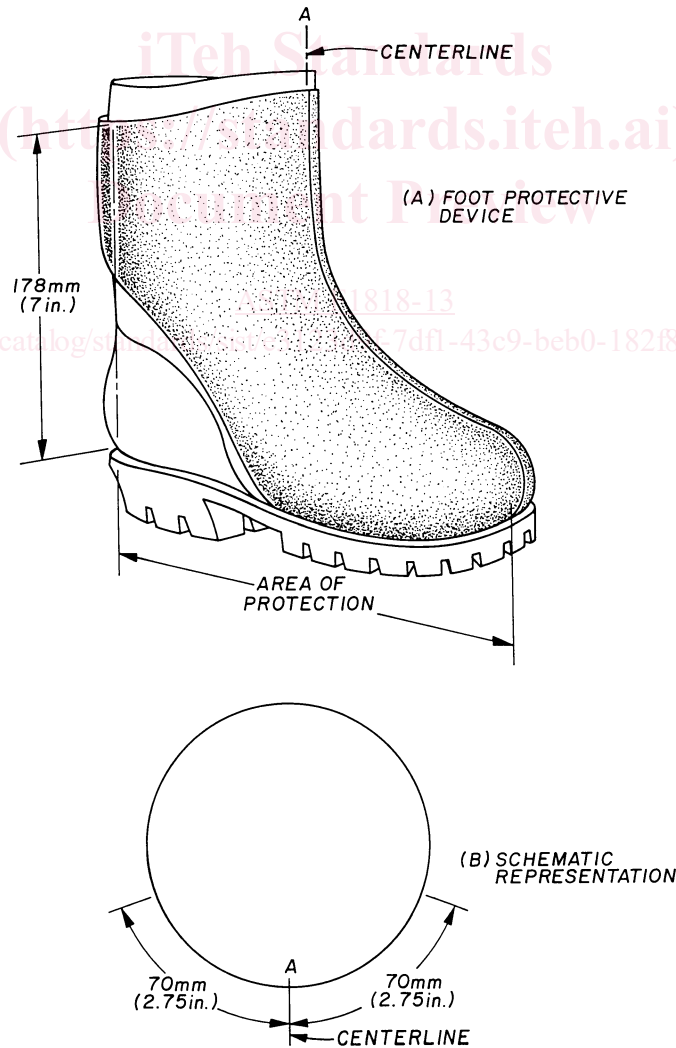


FIG. 1 Footwear With Slip-on or Non-frontal Closure Device