



**International
Standard**

ISO 18563-3

**Non-destructive testing —
Characterization and verification
of ultrasonic phased array
equipment —**

**Part 3:
Complete systems**

*Essais non destructifs - Caractérisation et vérification de
l'appareillage ultrasonore multiélément —*

Partie 3: Systèmes complets

**Second edition
2024-05**

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 18563-3:2024](https://standards.itih.ai/catalog/standards/iso/1a074d0d-dc53-43d3-87d1-7f512779d478/iso-18563-3-2024)

<https://standards.itih.ai/catalog/standards/iso/1a074d0d-dc53-43d3-87d1-7f512779d478/iso-18563-3-2024>

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 18563-3:2024](https://standards.iteh.ai/catalog/standards/iso/1a074d0d-dc53-43d3-87d1-7f512779d478/iso-18563-3-2024)

<https://standards.iteh.ai/catalog/standards/iso/1a074d0d-dc53-43d3-87d1-7f512779d478/iso-18563-3-2024>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols	2
5 General requirements for conformity	3
5.1 General.....	3
5.2 Reference system.....	3
5.3 Identical system.....	3
5.4 Periodic checks.....	3
6 Qualification of test personnel	4
7 Modes of operation for phased array techniques	4
8 Equipment required for tests	6
9 Tests to be performed	6
9.1 General.....	6
9.2 External aspects of the equipment.....	8
9.2.1 General.....	8
9.2.2 Procedure.....	8
9.2.3 Acceptance criteria.....	8
9.2.4 Reporting.....	8
9.3 Elements and channels.....	8
9.3.1 General.....	8
9.3.2 Channel assignment.....	8
9.3.3 Relative sensitivity of elements, reference amplitude and dead elements.....	10
9.4 Verification of correct operation.....	12
9.4.1 General.....	12
9.4.2 Amplification system.....	12
9.4.3 Verification of correct operation by using imaging.....	15
9.4.4 Verification of correct operation by using beams.....	18
9.4.5 Skew angle.....	22
9.5 Other verifications.....	22
9.5.1 Squint angle.....	22
9.5.2 Grating lobes (recommended).....	23
10 System record sheet	23
Annex A (informative) Characterization of sound beams	25
Bibliography	32

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 135 *Non-destructive testing*, Subcommittee SC 3 *Ultrasonic testing*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 138, *Non-destructive testing*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 18563-3:2015), which has been technically revised.

The main changes are as follows:

- integration of matrix array probes;
- deletion of group 1 and 2 tests;
- addition of a clause on the use of imaging for complete system verification (9.4.3) as a simplification for a more functional standard (characterisation of beams moved to [Annex A](#));
- addition of signal processing techniques using arrays (e.g. total focusing technique (TFM)) in the scope.

A list of all parts in the ISO 18563 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Non-destructive testing — Characterization and verification of ultrasonic phased array equipment —

Part 3: Complete systems

1 Scope

This document addresses ultrasonic test systems implementing array probes, for contact technique (with or without wedge) or for immersion technique, with centre frequencies in the range of 0,5 MHz to 10 MHz.

This document provides methods and acceptance criteria for determining the compliance of the complete system (see 3.2). Its purpose is for the verification of the correct operation of the system prior to testing or verification of the absence of degradation of the system.

The methods are not intended to prove the suitability of the system for particular applications but are intended to prove the capability of the complete system (used for an application) to operate correctly according to the settings used. Tests can be performed on individual ultrasonic beams (for phased array technique, see 9.4.4) or on resulting images (for phased array technique and total focusing technique, see 9.4.3).

The tests can be limited to the functions that are intended to be used for a certain application.

This document does not cover the sensitivity setting of the system for a specific application. Nor does it apply to the characterization or verification of the mechanical scanning equipment. It is intended that these items will be covered by the test procedure.

This document does not address the phased array technique using tandem technique.

The characterization of beams, as recommended in case of dead elements or for more in-depth knowledge of the beams, is presented in Annex A. It is not applicable for signal processing technology using arrays.

NOTE Unless stated otherwise, in this document ‘TFM’ and ‘TFM technique’ refer to the total focusing technique as defined in ISO 23243, and to related techniques, see for example ISO 23865 and ISO 23234.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5577, *Non-destructive testing — Ultrasonic testing — Vocabulary*

ISO 9712, *Non-destructive testing — Qualification and certification of NDT personnel*

ISO 18563-1, *Non-destructive testing — Characterization and verification of ultrasonic phased array equipment — Part 1: Instruments*

ISO 18563-2, *Non-destructive testing — Characterization and verification of ultrasonic phased array equipment — Part 2: Probes*

ISO 22232-2, *Non-destructive testing — Characterization and verification of ultrasonic test equipment — Part 2: Probes*

ISO 23243, *Non-destructive testing — Ultrasonic testing with arrays — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5577, ISO 23243 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

combined equipment

connected set including the instrument, the array probe (with wedge if applicable) and connecting cables, including adapters

[SOURCE: ISO 23243:2020. Modified – array and wedge added]

3.2

complete system

combined equipment including the settings for a given mode of operation

Note 1 to entry: Settings are specific values or ranges of values, e.g. electronic scanning or steering range.

3.3

reference system

complete system, including an instrument according to ISO 18563-1 and an array probe initially according to ISO 18563-2, on which all of the applicable tests defined in [Clause 9](#) of this document have been performed successfully

3.4

identical system

complete system in which instrument, array probe, wedge, connecting cables and the settings for a given mode of operation are identical to those of the reference system

Note 1 to entry: Components are identical if from the same manufacturer and the same model.

3.5

system record sheet

document for reporting the results for a complete system which enables a comparison with the values obtained from the reference system

4 Symbols

For the purposes of this document, the symbols given in [Table 1](#) apply.

Table 1 — Symbols

Symbol	Unit	Definitions
$(X_C; Z_C)$	mm; mm	Coordinates of the position of the centre of the reference reflector
$(X_M; Z_M)$	mm; mm	Coordinates of the position of maximum amplitude of an indication
A_{el}	V or % FSH	Amplitude of one elementary signal
a_i	mm	<i>Contact technique</i> : reduced projected sound path length <i>Immersion technique</i> : distance between the orthogonal projection of the axis of the side-drilled hole on the test surface and the centre of the probe front surface
A_{max}	V or % FSH	Maximum value of the amplitudes of all elementary signals
A_{min}	V or % FSH	Minimum value of the amplitudes of all elementary signals, excluding the dead elements
A_{ref}	V or % FSH	Median value of the amplitudes of all elementary signals

Table 1 (continued)

Symbol	Unit	Definitions
D	mm	Diagonal of the active aperture
D_{CM}	mm	Distance between the centre of a side-drilled hole and the point of maximum amplitude of the indication of this hole
G_{ref}	dB	Reference gain
N	mm	Near-field length associated with the active aperture
p	mm	Pitch
X_s	mm	Distance between the probe front surface and the probe index point for the studied beam
ΔS_{el}	dB	Relative sensitivity of an element
θ	°	Angle of refraction
λ	mm	Wavelength

5 General requirements for conformity

5.1 General

All following tests shall be performed with an instrument that complies with ISO 18563-1 and an array that initially complied with ISO 18563-2.

The tests can be limited to the functions that are intended to be used for a certain application, e.g. used channels of the instrument or used part of the array or specific settings for a specified mode of operation.

When all required tests have been successfully conducted, the complete system is considered to conform to this document.

5.2 Reference system

a) The tests to be performed prior to the first use of a complete system are described in [Table 4](#).

When all required tests have been successfully conducted, this complete system may be used as a reference system. The results of the measurements made are the base values.

b) A system record sheet of these base values shall be created.

5.3 Identical system

a) When an identical system is created, and/or when using other channels of the instrument and duplicating the settings, or after a maintenance operation or after the replacement of a system component, the tests as described in [Table 4](#) shall be performed again.

b) The results of the measurements made on the identical system shall be recorded in the system record sheet and compared against the base values.

5.4 Periodic checks

a) For a periodic check of correct operation of the system, the tests as described in [Table 4](#) shall be performed again.

b) The frequency of checking of the complete system shall be specified in the test procedure, e. g. before starting and at the end of the non-destructive testing or daily, weekly, monthly, depending on the application.

c) Each periodic check shall be documented on the system record sheet, either by recording the values of the checks or by stating that the results are within the acceptance criteria.

6 Qualification of test personnel

- a) Personnel performing the verifications in accordance with this document shall be qualified to an appropriate level in ultrasonic testing in accordance with ISO 9712 or equivalent.
- b) In addition to general knowledge of ultrasonic testing, the operators shall be familiar with, and have practical experience in, the use of the ultrasonic phased array technique or the total focusing technique (TFM).

7 Modes of operation for phased array techniques

This clause is not applicable for signal processing techniques using arrays, e.g. TFM.

This clause is applicable for phased array techniques based on beams by using a set of delay laws for multiple array elements during transmission and/or reception.

Depending on the application, the following options of the phased array technique may be used:

- number of active apertures (one or multiple);
- number of shots or delay laws (one or multiple) per active aperture;
- type of delay law (beam steering, beam focusing or combined setting).

The six most common modes of operation for phased array techniques are defined in [Table 2](#).

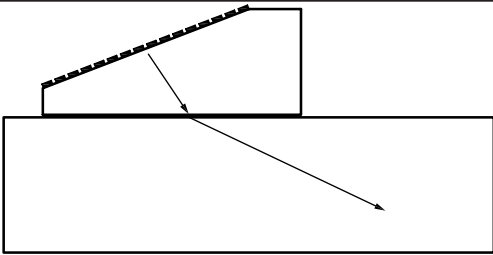
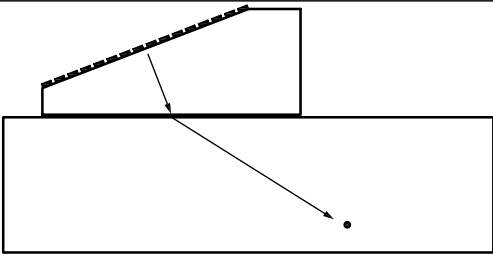
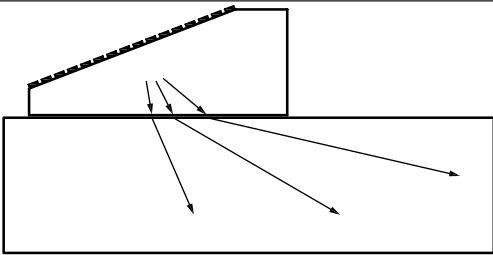
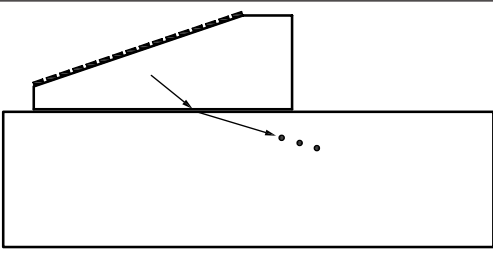
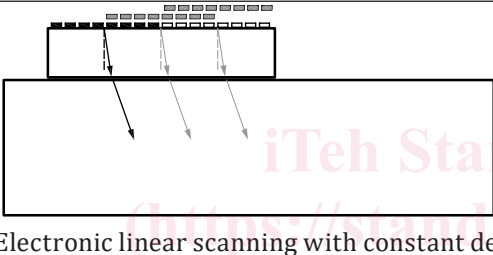
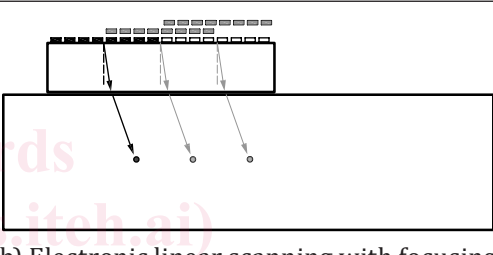
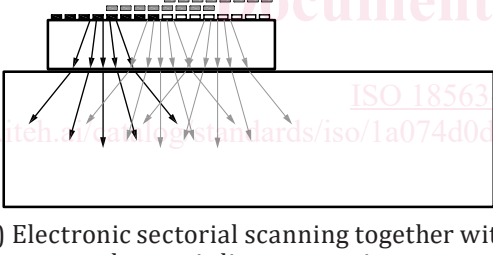
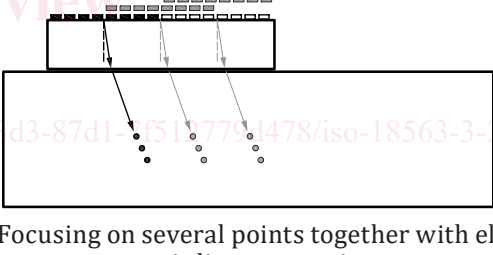
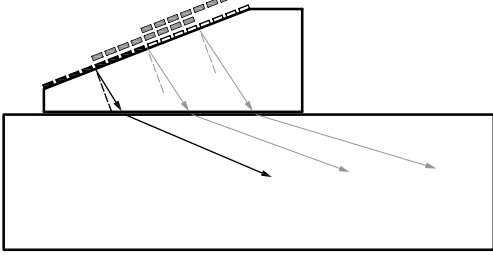
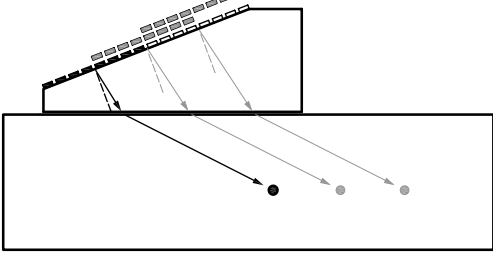
Examples of modes of operation for phased array techniques are illustrated in [Table 3](#).

Considering these different modes of operation and their resulting beams, the number of beams or images to be tested is described in [Table 4](#).

Table 2 — Definition of modes of operation for phased array techniques

Modes	Number of active apertures	Number of delay laws per active aperture	Identical or different set of delay laws for each aperture	Array orientation	Resulting beam(s)
Mode 1	One	One	Not applicable (only one aperture)	Not relevant	One beam
Mode 2	One	Multiple	Not applicable (only one aperture)	Not relevant	Multiple beams from one active aperture
Mode 3	Multiple	One	Identical	Array parallel to the test surface	One beam from each active aperture, all beams are identical
Mode 4	Multiple	Multiple	Identical	Array parallel to the test surface	Multiple beams from each active aperture, beams are identical for all active apertures
Mode 5	Multiple	One	Identical	Array not parallel to the test surface	One beam from each active aperture, beams are different for each active aperture
			Different	Not relevant	
Mode 6	Multiple	Multiple	Identical	Array not parallel to the test surface	Multiple beams from each active aperture, beams are different for each active aperture
			Different	Not relevant	

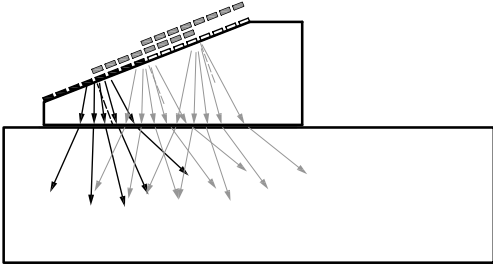
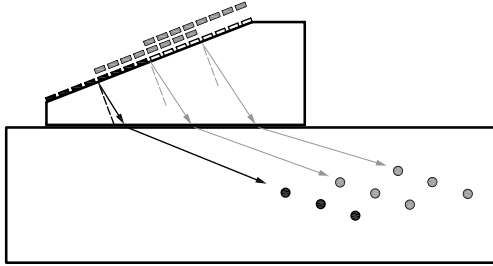
Table 3 — Examples of modes of operation for phased array techniques

Modes	Examples	
<p>Mode 1</p>	 <p>a) Beam steering</p>	 <p>b) Beam focusing on one point</p>
<p>Mode 2</p>	 <p>a) Electronic sectorial scanning</p>	 <p>b) Focusing on several points</p>
<p>Mode 3</p>	 <p>a) Electronic linear scanning with constant delay path</p>	 <p>b) Electronic linear scanning with focusing</p>
<p>Mode 4</p>	 <p>a) Electronic sectorial scanning together with electronic linear scanning</p>	 <p>b) Focusing on several points together with electronic linear scanning</p>
<p>Mode 5</p>	 <p>a) Electronic linear scanning with varying delay path</p>	 <p>b) Electronic linear scanning with focusing or combined electronic scanning</p>

The medium between the array and the test object may be a fluid (immersion) or a solid (e.g. wedge).

NOTE 1 For simplicity, only the beam centre lines are indicated. An arrow indicates the beam direction, dots indicate focal points.

Table 3 (continued)

Modes	Examples	
Mode 6	 <p data-bbox="304 539 842 595">a) Electronic sectorial scanning together with electronic linear scanning</p>	 <p data-bbox="895 539 1461 595">b) Focusing on several points together with electronic linear scanning</p>
<p>The medium between the array and the test object may be a fluid (immersion) or a solid (e.g. wedge).</p> <p>NOTE 1 For simplicity, only the beam centre lines are indicated. An arrow indicates the beam direction, dots indicate focal points.</p>		

8 Equipment required for tests

The equipment required for the tests of a complete system includes:

- a) suitable reference block(s);
- b) measurement devices for the length with an accuracy of $\pm 0,5$ mm and for the angle with an accuracy of $\pm 1^\circ$.

9 Tests to be performed

9.1 General

- a) Before performing the tests, the equipment settings shall be made according to the array and wedge that are in use for the application.
- b) For applications where only a part of the array is used, the tests can be limited to this part. In that case, the results of the tested part of the array shall be recorded on the system record sheet, including a description of the tested part of the array.
- c) The tests described in [Table 4](#) shall be performed initially ([5.2](#)), after every maintenance operation or after the replacement of a system component ([5.3](#)), and periodically ([5.4](#)).

[Table 4](#) describes the various tests to be conducted on a complete system based on the different modes of operation for phased array techniques.

The last column of [Table 4](#) describes the various tests to be conducted on a complete system in case of signal processing techniques using arrays. For conciseness, it is named TFM mode.

For tests where [Table 4](#) indicates that it is required to verify at least three beams, apertures or presentations, this means at least the median and both extreme situations shall be verified.

For phased array technique, tests can be performed either on individual ultrasonic beams or on resulting images, if applicable.

For total focusing technique, tests can only be performed on resulting images, because no individual ultrasonic beams are available.

Table 4 — Tests to be performed

Items	Test and clause	Mode 1	Mode 2 Example a	Mode 2 Example b	Mode 3	Mode 4	Mode 5	Mode 6	TFM mode
External aspects	External aspects of the equipment 9.2					Required			
Elements and channels	Channel assignment 9.3.2					Required for used channels			
	Relative sensitivity of elements, reference amplitude and dead elements 9.3.3					Required for used channels			
Correct operation ^c	Amplification system 9.4.2					Required for used channels			
	Using imaging ^a 9.4.3	Not applicable	S-scan presentation	Not applicable	L-scan presentation	At least one L-scan or S-scan presentation	L-scan or S-scan presentation	At least three L-scan or S-scan presentations ^b	TFM image
	Using beams ^a 9.4.4 Skew angle 9.4.5	Used beam	At least 3 beams ^b		At least three apertures ^b	At least the three following beams: first shot of first aperture, last shot of last aperture and median shot of median aperture	At least three apertures ^b	At least three beams ^b for each of these apertures	Not applicable Required if applied
Other verifications	Characterization of sound beams Annex A					Optional			Not applicable
	Squint angle 9.5.1 Grating lobes 9.5.2					Required			
						Optional			
	^a Verification of correct operation is either done by using imaging (9.4.3) or by using beams (9.4.4).								
	^b Verifications shall be done for extreme and median beams or apertures or presentations:								
	^c For matrix array probes generating beams with skew angles, the verifications shall be performed in the extreme and median deflection planes								