

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Space After: 0 pt, Line spacing: single

Formatted: Left: 1.9 cm, Right: 1.9 cm, Bottom: 1 cm, Gutter: 0 cm, Header distance from edge: 1.27 cm, Footer distance from edge: 0.5 cm

Commented [eXtyles1]: The reference is to a withdrawn standard which has been replaced

ISO 20344, Personal protective equipment — Test methods for footwear

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: No page break before, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: French (Switzerland)

Formatted: French (Switzerland)

Formatted: French (Switzerland)

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO/DTS 20490](#)

<https://standards.iteh.ai/catalog/standards/sist/b89bbed1-11bd-4f52-95a5-67a1b74d1262/iso-dts-20490>

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Left, Space After: 0 pt, Line spacing: single

Contents

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions and abbreviated terms	1
4 Test description	2
4.1 General	2
4.2 Test device settings	2
4.3 Environmental conditions	2
4.4 Apparatus and hardware	2
4.5 Test distance	4
4.6 Test charts	5
4.6.1 General	5
4.6.2 Recommended test charts	5
4.7 Test conditions	5
4.8 Sharpness measurement	6
5 Autofocus measurement	6
5.1 General	6
5.2 Camera test position and distances	6
5.3 Capture test sequence	6
5.3.1 Test sequence for continuous autofocus (AF-C)	6
5.3.2 Test sequence for single autofocus (AF-S)	8
6 Presentation of results	11
6.1 Result figure	11
6.2 Reporting the results	12
Annex A (informative) Test setup and chart details	14
Annex B (informative) Test software and algorithm details: sharpness estimation algorithm	16
Annex C (informative) User reaction time test results during photo capture	19
Annex D (informative) Correlation between subjective sharpness and sharpness score	22
Bibliography	23

Foreword — v

Introduction — vi

1 — Scope — 1

ISO/DTS 20490:2023 (E)

2 Normative references 1

3 Terms and definitions and abbreviated terms 1

4 Test description 2

4.1 General 2

4.2 Test device settings 2

4.3 Environmental conditions 2

4.4 Apparatus and hardware 2

4.5 Test distance 4

4.6 Test charts 4

4.6.1 General 4

4.6.2 Recommended test charts 5

4.7 Test conditions 5

4.8 Sharpness measurement 6

5 Autofocus measurement 6

5.1 General 6

5.2 Camera Test Position and distances 6

5.3 Capture Test Sequence 6

5.3.1 Test sequence for continuous autofocus (AF-C) 6

5.3.2 Test sequence for single autofocus (AF-S) 7

6 Presentation of results 10

6.1 Result figure 10

6.2 Reporting the results 11

Annex A (informative) Test setup and chart details 13

Chart recommendations 13

Annex B (informative) Test software and algorithm details: Sharpness estimation algorithm 15

B.1 Algorithm overview 15

B.2 Example use of sharpness algorithm 15

B.2.1 General 15

B.2.2 Inputs 15

B.2.3 Outputs 16

B.3 Examples 16

B.3.1 Case 1 16

B.3.2 Case 2 17

Annex C (informative) User reaction time test results during photo capture 18

C.1 Test introduction 18

C.2 Test subjects 19

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Space After: 0 pt, Line spacing: single

iTeh Standards

(<https://standards.iteh.ai>)

Document Preview

ISO/DTS 20490

<https://standards.iteh.ai/catalog/standards/sist/b89bbbd1-11bd-4f52-95a5-67a1b74d1262/iso-dts-20490>

C.3 — Test interior — 18

C.4 — Test setup — 18

C.5 — Test results — 18

Annex D (informative) Correlation between subjective sharpness and sharpness score — 21

D.1 — Correlation study introduction — 21

D.2 — Test setup — 21

D.3 — Results — 21

Bibliography — 22

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Left, Space After: 0 pt, Line spacing: single

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO/DTS 20490](https://standards.iteh.ai/catalog/standards/sist/b89bbed1-11bd-4f52-95a5-67a1b74d1262/iso-dts-20490)

<https://standards.iteh.ai/catalog/standards/sist/b89bbed1-11bd-4f52-95a5-67a1b74d1262/iso-dts-20490>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part-1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part-2 (see www.iso.org/directives).

~~Attention is drawn~~ ISO draws attention to the possibility that some of the elements implementation of this document may be involve the subject of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 42, *Photography*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Space After: 0 pt, Line spacing: single

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: English (United Kingdom)

Field Code Changed

Formatted: English (United Kingdom)

Field Code Changed

Introduction

This ~~technical specification document~~ is focusing on measuring the repeatability of the AF latency and the sharpness of the captured images. ISO ~~standard 15781:2019~~ specifies how to measure and report the shooting time lag, shutter release time lag, shooting rate and start-up time lag for digital still cameras. This ~~ISO technical specification document~~ focuses on combining the autofocus latency with measured sharpness of the captured photos, making it more comprehensive test procedure for evaluating autofocus systems.

This ~~standard document~~ widens the options for usable test charts from high contrast digitally created charts to natural images and to other test charts and even 3D scenes, challenging the autofocus systems. It also allows measurements to be carried out in variable lighting conditions, and in presence of handshake, challenging the AF system further.

~~ISO 15781 standard~~ is mainly focusing on traditional single autofocus solutions actuated by half pressing physical shutter button, widely used with SLR cameras. However, this ~~technical specification document~~ can be applied to continuous AF systems, commonly used in mobile camera devices, as well as to single autofocus systems.

This ~~ISO Technical Specification document~~ provides procedures and methods to measure and report the autofocus (AF) repeatability of sharpness and latency of a digital still camera. The data gathered is useful when comparing camera devices with sufficiently similar autofocus solutions and it helps with further investigations into a camera's autofocus repeatability performance.

The terminology is defined within this ~~specification document~~ along with describing the test charts, the setup, the methods, the performance metrics and analysis methodology to assess and report on the autofocus repeatability of a camera device. This ~~test specification document~~ covers the test setups, the process, what pictures to capture and the metrics to calculate.

A great camera system should be capable to deliver repeatably sharp images within acceptable and repeatable latency, making the characterization of the AF system very important.

Identification of patent holders: the following text shall be included if patent rights have been identified.

~~The International Organization for Standardization (ISO) [and/or] International Electrotechnical Commission (IEC) draw[s] attention to the fact that it is claimed that compliance with this document may involve the use of a patent.~~

~~ISO [and/or] IEC take[s] no position concerning the evidence, validity and scope of this patent right.~~

~~The holder of this patent right has assured ISO [and/or] IEC that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO [and/or] IEC. Information may be obtained from the patent database available at www.iso.org/patents.~~

~~Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO [and/or] IEC shall not be held responsible for identifying any or all such patent rights.~~

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Left, Space After: 0 pt, Line spacing: single

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Measuring ~~auto-focus~~autofocus repeatability of sharpness and latency

Formatted: Left: 1.9 cm, Right: 1.9 cm, Bottom: 1 cm, Gutter: 0 cm, Header distance from edge: 1.27 cm, Footer distance from edge: 0.5 cm

1 Scope

This ~~technical specification document~~ is focused on measuring the autofocus (AF) repeatability of sharpness and latency, meaning camera system's capability to produce sharp images within certain time frame. The scope of ~~this technical specification document~~ is limited to testing autofocus sharpness and latency repeatability with stationary charts only as testing with moving charts is not covered.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~<std>~~ISO 15781, Photography — Digital still cameras — Measuring shooting time lag, shutter release time lag, shooting rate, and start-up time lag~~</std>~~

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Commented [eXtyle2]: URL Validation failed: https://www.iso.org/obp returns an unknown connection failure. (connection error "Error 12031: ERROR_INTERNET_CONNECTION_RESET").

3 Terms and definitions and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain ~~terminological~~terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

3.1 ~~Autoexposure~~(autoexposure AE)

system to automatically adjust the exposure parameters such as gain, exposure time and aperture

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Commented [eXtyle3]: The term "Autoexposure (AE)" has not been used anywhere in this document

3.2 ~~Autofocus~~(autofocus AF)

focusing system which can automatically control the optical system in a camera to bring a subject into focus

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Commented [eXtyle4]: The term "Autofocus (AF)" has not been used anywhere in this document

3.3 ~~Continuous~~continuous autofocus-(AF-C)

autofocus system continuously keeping subject in focus

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Commented [eXtyle5]: The term "Continuous autofocus (AF-C)" has not been used anywhere in this document

3.4 ~~Field~~field of view-(FoV)

the extent of the observable world that is seen (solid angle through optics to sensor) at any given moment by an imaging system i.e. camera

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Commented [eXtyle6]: The term "Field of view (FoV)" has not been used anywhere in this document

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

3.5

~~Depth~~depth of field (DoF)

the distance between the nearest and the furthest objects that are in acceptably sharp focus in an image captured with a camera

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Header, Space After: 0 pt, Line spacing: single

Commented [eXtyle7]: The term "Depth of field (DoF)" has not been used anywhere in this document

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

3.6

~~Spatial~~spatial frequency response (SFR)

relative amplitude response of an imaging system as a function of input spatial frequency

Commented [eXtyle8]: The term "Spatial frequency response (SFR)" has not been used anywhere in this document

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

3.7

~~Single~~single autofocus (AF-S)

focusing system which focuses on the selected target once, often activated by pressing camera button halfway down, and keeps the selected focus until focused again

Commented [eXtyle9]: The term "Single autofocus (AF-S)" has not been used anywhere in this document

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

4 Test description

4.1 General

The measurement shall be carried out using output images from a digital still camera with which the test is conducted.

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.71 cm

The following measurement conditions should be used as nominal conditions when measuring the autofocus repeatability of a digital still camera. If it is not possible to achieve these conditions, the actual capture conditions shall be listed along with the reported results.

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Target of the study is to measure if the devices in question are capable to focus and produce sharp images within a certain timeframe which is based on measurements of human reaction time in photographic situation per [annex C:Annex C](#).

4.2 Test device settings

Cameras are to be tested in default out of the box settings. If testing is done with something else than out of the box settings, those settings should be mentioned in the report.

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.71 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

4.3 Environmental conditions

The measurements shall be carried out in the following environment unless otherwise stated:

- ~~Temperature~~temperature: 23 °C +/- 3 °C.

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.71 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

4.4 Apparatus and hardware

The test setup consists of several components: close distance and far distance test charts, illumination setup for both charts, actuated holder to move the close distance chart, timing LED panel, and computer system to control the timing of the image capture and peripheral devices like the close distance chart actuation and LED timing panel or timer.

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.71 cm

In this ~~test specification~~document the test setups and recommendations are assuming usage of reflective test charts. In special situations also transmissive test chart can be used, but particular care needs to be applied when using transmissive charts. For example, the recommended lux conditions should be in-line with the used panel brightness. The light flux from the chart shall be diffused and shall not include any specular component.


Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

The camera holder should allow the **centercentre** of the camera optical axis to be aligned along a line perpendicular to the chart in such a way that the optical axis is perpendicular for both close distance and far distance charts.

The close distance chart actuation stage **shouldshall** allow the chart to be removed or inserted into the field of view of the camera **withingwithin** 0,1 s or less, as required in **ISO_15781_2019**.

Figure 1 shows the top view of the example test setup. The close distance and far distance charts are aligned orthogonally to the camera. Baffles can be used to block light traveling directly from the light source to the camera lens and minimize light being cast outside the 18 % gray area.

20490_ed1fig1.EPS

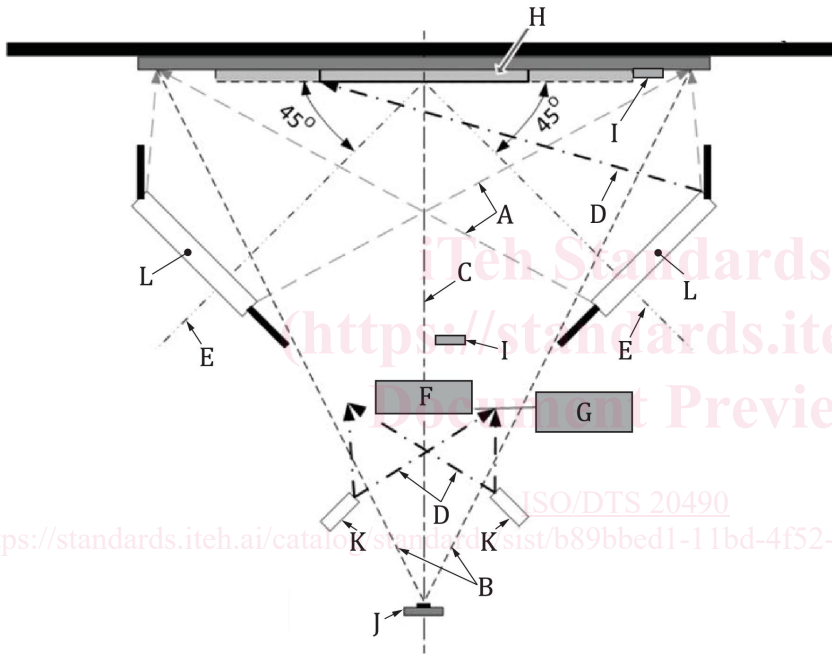

Key

- A **Lineline** A: Light rays from the edges of the lamps are shown intersection of which the 18 % gray background edges. ---
- B **Lineline** B: Camera HFoV ---
- C **Lineline** C: Camera optical axes - - - - -
- D **Lineline** D: Light rays from close distance chart illuminators - · - · - ·
- E **Lineline** E: Light intensity pattern from the lamp is pointing parallel to the direction of this line. The line intersects the target at 45 degrees - · - · - ·
- F **Closeclose** distance chart
- G **Closeclose** distance chart actuator stage
- H **Farfar** distance chart
- I **LED** timer
- J **Camercamera** under test

Formatted: Font: 11 pt
 Formatted: Font: 11 pt
 Formatted: Header, Left, Space After: 0 pt, Line spacing: single

Formatted: Default Paragraph Font
 Formatted: Default Paragraph Font

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Font: 9 pt

Formatted Table

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Font: 9 pt