

INTERNATIONAL
STANDARD

ISO/IEC
13818-1

Eighth edition
2022-09

**Information technology — Generic
coding of moving pictures and
associated audio information —**

**Part 1:
Systems**

iTeh STANDARD PREVIEW
*Technologies de l'information — Codage générique des images
animées et du son associé —
(standards.iteh.ai)*

[ISO/IEC 13818-1:2022](#)

[https://standards.iteh.ai/catalog/standards/sist/c32f3099-d5e1-4224-9008-
4cb585fa88c9/iso-iec-13818-1-2022](https://standards.iteh.ai/catalog/standards/sist/c32f3099-d5e1-4224-9008-4cb585fa88c9/iso-iec-13818-1-2022)



Reference number
ISO/IEC 13818-1:2022(E)

© ISO/IEC 2022

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 13818-1:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/c32f3099-d5e1-4224-9008-4cb585fa88c9/iso-iec-13818-1-2022>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <https://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

This document was prepared by ITU-T as Rec. ITU-T H.222.0 (06/2021) and drafted in accordance with its editorial rules, in collaboration with Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

This eighth edition cancels and replaces the seventh edition (ISO/IEC 3818-1:2019), which has been technically revised. It also incorporates the Amendment ISO/IEC 13818-1:2019/Amd 1:2020 and the Technical Corrigendum ISO/IEC 13818-1:2019/Cor 1:2020.

A list of all parts in the ISO/IEC 13818 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

CONTENTS

	<i>Page</i>
SECTION 1 – GENERAL.....	1
1.1 Scope.....	1
1.2 Normative references.....	1
SECTION 2 – TECHNICAL ELEMENTS.....	4
2.1 Definitions.....	4
2.2 Symbols and abbreviations	12
2.3 Method of describing bit stream syntax.....	14
2.4 Transport stream bitstream requirements	15
2.5 Program stream bitstream requirements	63
2.6 Program and program element descriptors	76
2.7 Restrictions on the multiplexed stream semantics	157
2.8 Compatibility with ISO/IEC 11172.....	161
2.9 Registration of copyright identifiers.....	161
2.10 Registration of private data format.....	162
2.11 Carriage of ISO/IEC 14496 data	162
2.12 Carriage of metadata.....	174
2.13 Carriage of ISO 15938 data	182
2.14 Carriage of Rec. ITU-T H.264 ISO/IEC 14496-10 video.....	183
2.15 Carriage of ISO/IEC 14496-17 text streams	199
2.16 Carriage of auxiliary video streams.....	200
2.17 Carriage of HEVC	201
2.18 Carriage of green access units.....	215
2.19 Carriage of ISO/IEC 23008-3 MPEG-H 3D audio data	217
2.20 Carriage of Quality Access Units in MPEG-2 sections	219
2.21 Carriage of sample variants.....	220
2.22 Carriage of Media Orchestration Access Units.....	221
2.23 Carriage of VVC	221
2.24 Carriage of EVC	226
Annex A CRC decoder model	230
A.1 CRC decoder model.....	230
Annex B Digital storage medium command and control (DSM-CC).....	231
B.1 Introduction.....	231
B.2 General elements	232
B.3 Technical elements	234
Annex C Program-specific information	240
C.1 Explanation of program-specific information in transport streams.....	240
C.2 Introduction.....	240
C.3 Functional mechanism	240
C.4 The mapping of sections into transport stream packets	241
C.5 Repetition rates and random access.....	241
C.6 What is a program?.....	242
C.7 Allocation of program_number	242
C.8 Usage of PSI in a typical system	242
C.9 The relationships of PSI structures	243
C.10 Bandwidth utilization and signal acquisition time	245
Annex D Systems timing model and application implications of this Recommendation International Standard	248
D.1 Introduction.....	248
Annex E Data transmission applications	257
E.1 General considerations.....	257
E.2 Suggestion.....	257
Annex F Graphics of syntax for this Recommendation International Standard	258
F.1 Introduction.....	258

Annex G General information	262
G.1 General information.....	262
Annex H Private data.....	263
H.1 Private data.....	263
Annex I Systems conformance and real-time interface.....	264
I.1 Systems conformance and real-time interface	264
Annex J Interfacing jitter-inducing networks to MPEG-2 decoders.....	265
J.1 Introduction.....	265
J.2 Network compliance models.....	265
J.3 Network specification for jitter smoothing.....	266
J.4 Example decoder implementations.....	267
Annex K Splicing transport streams.....	268
K.1 Introduction.....	268
K.2 The different types of splicing point	268
K.3 Decoder behaviour on splices	269
Annex L Registration procedure (see 2.9).....	271
L.1 Procedure for the request of a Registered Identifier (RID)	271
L.2 Responsibilities of the Registration Authority.....	271
L.3 Responsibilities of parties requesting an RID.....	271
L.4 Appeal procedure for denied applications	271
Annex M Registration application form (see 2.9).....	273
M.1 Contact information of organization requesting a Registered Identifier (RID)	273
M.2 Statement of an intention to apply the assigned RID	273
M.3 Date of intended implementation of the RID.....	273
M.4 Authorized representative	273
M.5 For official use only of the Registration Authority	273
Annex N Registration Authority Diagram of administration structure (see 2.9).....	274
Annex O Registration procedure (see 2.10).....	275
O.1 Procedure for the request of an RID.....	275
O.2 Responsibilities of the Registration Authority.....	275
O.3 Contact information for the Registration Authority	275
O.4 Responsibilities of parties requesting an RID.....	275
O.5 Appeal procedure for denied applications	275
Annex P Registration application form	277
P.1 Contact information of organization requesting an RID	277
P.2 Request for a specific RID.....	277
P.3 Short description of RID that is in use and date system that was implemented	277
P.4 Statement of an intention to apply the assigned RID	277
P.5 Date of intended implementation of the RID.....	277
P.6 Authorized representative	277
P.7 For official use of the Registration Authority	277
Annex Q T-STD and P-STD buffer models for ISO/IEC 13818-7 ADTS.....	278
Q.1 Introduction.....	278
Q.2 Leak rate from transport buffer	278
Q.3 Buffer size.....	278
Q.4 Conclusion	279
Annex R Carriage of ISO/IEC 14496 scenes in Rec. ITU-T H.222.0 ISO/IEC 13818-1	281
R.1 Content access procedure for ISO/IEC 14496 program components within a program stream	281
R.2 Content access procedure for ISO/IEC 14496 program components within a transport stream	282
Annex S Carriage of JPEG 2000 part 1 video over MPEG-2 transport streams	286
S.1 Introduction.....	286
S.2 J2K video access unit, J2K video elementary stream, J2K video sequence and J2K still picture	286
S.3 Optional J2K block mode for high resolution support	286

	<i>Page</i>
S.4 Optional J2K stripe mode for Ultra-Low Latency	287
S.5 Elementary stream header (elsm) and mapping to PES packets	287
S.6 J2K transport constraints	290
S.7 Interpretation of flags in adaptation and PES headers for J2K video elementary streams.....	291
S.8 T-STD extension for J2K video elementary streams	291
Annex T MIME type for MPEG-2 transport streams.....	294
T.1 Introduction.....	294
T.2 MIME type and subtype	294
T.3 Security considerations	295
T.4 Parameters.....	295
Annex U Carriage of timeline and external media information over MPEG-2 transport streams	297
U.1 Introduction.....	297
U.2 TEMI access unit and TEMI elementary stream.....	298
U.3 AF descriptors	299
Annex V Transport of HEVC tiles.....	308
V.1 Introduction.....	308
V.2 HEVC tile substream identification example.....	309
V.3 Subregion layout example.....	309
Annex W Carriage of JPEG XS part 1 video over MPEG-2 Transport Streams.....	311
W.1 Introduction.....	311
W.2 JPEG XS video access unit, JPEG XS video elementary stream, JPEG XS video sequence and JPEG XS still picture.....	311
W.3 Elementary stream header (jxes) and mapping to PES packets	311
W.4 JPEG XS transport constraints	312
W.5 Interpretation of flags in adaptation field and PES packet for JPEG XS video elementary streams	313
W.6 T-STD extension for JPEG XS video elementary streams	313

ISO/IEC 13818-1:2022

<https://standards.iteh.ai/catalog/standards/sist/c32f3099-d5e1-4224-9008-4cb585fa88c9/iso-iec-13818-1-2022>

List of Tables

	<i>Page</i>
Table 2-1 – Transport stream.....	26
Table 2-2 – Transport packet of this Recommendation International Standard	26
Table 2-3 – PID table	27
Table 2-4 – Scrambling control values.....	27
Table 2-5 – Adaptation field control values	28
Table 2-6 – Transport stream adaptation field.....	28
Table 2-7 – Splice parameters Table 1 Simple Profile Main Level, Main Profile Main Level, SNR Profile Main Level (both layers), Spatial Profile High-1440 Level (base layer), High Profile Main Level (middle + base layers), Multi-view Profile Main Level (base layer) Video	35
Table 2-8 – Splice parameters Table 2 Main Profile Low Level, SNR Profile Low Level (both layers), High Profile Main Level (base layer), Multi-view Profile Low Level (base layer) Video	36
Table 2-9 – Splice parameters Table 3 Main Profile High-1440 Level, Spatial Profile High-1440 Level (all layers), High Profile High-1440 Level (middle + base layers), Multi-view Profile High-1440 Level (base layer) Video	36
Table 2-10 – Splice parameters Table 4 Main Profile High Level, High Profile High-1440 Level (all layers), High Profile High Level (middle + base layers), Multi-view Profile High Level (base layer) Video	36
Table 2-11 – Splice parameters Table 5 SNR Profile Low Level (base layer) Video	36
Table 2-12 – Splice parameters Table 6 SNR Profile Main Level (base layer) Video	37
Table 2-13 – Splice parameters Table 7 Spatial Profile High-1440 Level (middle + base layers) Video.....	37
Table 2-14 – Splice parameters Table 8 High Profile Main Level (all layers), High Profile High-1440 Level (base layer) Video	37
Table 2-15 – Splice parameters Table 9 High Profile High Level (base layer), Multi-view Profile Main Level (both layers) Video.....	37
Table 2-16 – Splice parameters Table 10 High Profile High Level (all layers), Multi-view Profile High-1440 Level (both layers) Video.....	38
Table 2-17 – Splice parameters Table 11 4:2:2 Profile Main Level Video.....	38
Table 2-18 – Splice parameters Table 12 Multi-view Profile Low Level (both layers) Video.....	38
Table 2-19 – Splice parameters Table 13 Multi-view Profile High Level (both layers) Video	38
Table 2-20 – Splice parameters Table 14 4:2:2 Profile High Level Video	39
Table 2-21 – PES packet	39
Table 2-22 – Stream_id assignments.....	42
Table 2-23 – PES scrambling control values.....	43
Table 2-24 – Trick mode control values.....	48
Table 2-25 – Field_id field control values.....	49
Table 2-26 – Coefficient selection values	49
Table 2-27 – Stream_id_extension assignments	51
Table 2-28 – Program-specific information	52
Table 2-29 – Program-specific information pointer.....	54
Table 2-30 – Program association section	54
Table 2-31 – table_id assignment values.....	55
Table 2-32 – Conditional access section	56
Table 2-33 – Transport stream program map section	57
Table 2-34 – Stream type assignments.....	58
Table 2-35 – Private section	61
Table 2-36 – The transport stream description table.....	62
Table 2-37 – Program stream.....	68
Table 2-38 – Program stream pack	68
Table 2-39 – Program stream pack header	68
Table 2-40 – Program stream system header.....	69
Table 2-41 – Program stream map	72
Table 2-42 – Program stream directory packet.....	74
Table 2-43 – Intra_coded indicator	76
Table 2-44 – Coding_parameters indicator	76
Table 2-45 – Program and program element descriptors	77
Table 2-46 – Video stream descriptor	78

	<i>Page</i>
Table 2-47 – Frame rate code	78
Table 2-48 – Audio stream descriptor.....	79
Table 2-49 – Hierarchy descriptor	80
Table 2-50 – Hierarchy_type field values	81
Table 2-51 – Registration descriptor	81
Table 2-52 – Data stream alignment descriptor.....	82
Table 2-53 – Video stream alignment values	82
Table 2-54 – AVC video stream alignment values	83
Table 2-55 – HEVC video stream alignment values.....	83
Table 2-56 – Audio stream alignment values	83
Table 2-57 – VVC video stream alignment values	84
Table 2-58 – EVC video stream alignment values.....	84
Table 2-59 – Target background grid descriptor	85
Table 2-60 – Video window descriptor	85
Table 2-61 – Conditional access descriptor.....	86
Table 2-62 – ISO 639 language descriptor.....	86
Table 2-63 – Audio type values	87
Table 2-64 – System clock descriptor	88
Table 2-65 – Multiplex buffer utilization descriptor.....	88
Table 2-66 – Copyright descriptor	89
Table 2-67 – Maximum bitrate descriptor	89
Table 2-68 – Private data indicator descriptor	90
Table 2-69 – Smoothing buffer descriptor	90
Table 2-70 – STD descriptor	91
Table 2-71 – IBP descriptor.....	91
Table 2-72 – MPEG-4 video descriptor	92
Table 2-73 – MPEG-4 audio descriptor	92
Table 2-75 – IOD descriptor.....	95
Table 2-76 – SL descriptor	95
Table 2-77 – FMC descriptor.....	96
Table 2-78 – External_ES_ID descriptor	96
Table 2-79 – Muxcode descriptor	97
Table 2-80 – FmxBufferSize descriptor	97
Table 2-81 – MultiplexBuffer descriptor.....	98
Table 2-82 – FlexMuxTiming descriptor	98
Table 2-83 – Content labelling descriptor	99
Table 2-84 – Metadata_application_format.....	99
Table 2-85 – Content_time_base_indicator values	100
Table 2-86 – Metadata pointer descriptor.....	101
Table 2-87 – Metadata format values.....	101
Table 2-88 – MPEG_carriage_flags.....	102
Table 2-89 – Metadata descriptor	103
Table 2-90 – decoder_config_flags.....	104
Table 2-91 – Metadata STD descriptor	105
Table 2-92 – AVC video descriptor	105
Table 2-93 – AVC timing and HRD descriptor	107
Table 2-94 – MPEG-2 AAC_audio_descriptor	108
Table 2-95 – MPEG-2_AAC_additional_information field values	109
Table 2-96 – MPEG-4 text descriptor	109
Table 2-97 – MPEG-4 audio extension descriptor.....	109
Table 2-98 – Auxiliary video stream descriptor	110
Table 2-99 – SVC extension descriptor.....	111
Table 2-100 – MVC extension descriptor	112
Table 2-101 – J2K video descriptor	113

	<i>Page</i>
Table 2-102 – Example frame rates based on DEN_frame_rate and NUM_frame_rate values.....	115
Table 2-103 – MVC operation point descriptor.....	117
Table 2-104 – MPEG2_stereoscopic_video_format_descriptor syntax.....	118
Table 2-105 – Stereoscopic_program_info_descriptor syntax	118
Table 2-106 – Stereoscopic_service_type values	119
Table 2-107 – Stereoscopic_video_info_descriptor syntax.....	119
Table 2-108 – Upsampling factor values.....	120
Table 2-109 – Extension descriptor	120
Table 2-110 – Extension descriptor tag values.....	123
Table 2-111 – Transport_profile_descriptor syntax.....	124
Table 2-112 – Transport_profile values	124
Table 2-113 – HEVC video descriptor.....	125
Table 2-115 – HEVC timing and HRD descriptor.....	127
Table 2-116 – Adaptation field extension descriptor	128
Table 2-117 – HEVC operation point descriptor.....	129
Table 2-118 – HEVC hierarchy extension descriptor	131
Table 2-119 – Semantics of extension dimension bits.....	131
Table 2-120 – Green extension descriptor.....	132
Table 2-121 – MPEG-H 3D audio descriptor.....	133
Table 2-122 – MPEG-H 3D audio config descriptor	133
Table 2-123 – MPEG-H 3D audio scene descriptor	134
Table 2-124 – MPEG-H 3D audio text label descriptor.....	137
Table 2-125 – MPEG-H 3D audio multi-stream descriptor	139
Table 2-126 – MPEG-H 3D audio DRC and Loudness descriptor()	140
Table 2-127 – MPEG-H 3D audio command descriptor.....	142
Table 2-128 – Quality extension descriptor.....	143
Table 2-129 – Virtual segmentation descriptor	144
Table 2-130 – HEVC tile substream descriptor	145
Table 2-131 — HEVC subregion descriptor	146
Table 2-132 – JPEG XS video descriptor.....	148
Table 2-133 – VVC video descriptor.....	150
Table 2-134 – Semantics of HDR_WGC_idc.....	151
Table 2-135 – SDR widely used video property combinations	152
Table 2-136 – WCG widely used video property combinations.....	152
Table 2-137 – HDR/WCG widely used video property combinations	152
Table 2-138 – No Indication	153
Table 2-139 – VVC timing and HRD descriptor	153
Table 2-140 – EVC video descriptor.....	154
Table 2-141 – EVC timing and HRD descriptor	156
Table 2-139 – Carriage of individual ISO/IEC 14496 streams in Rec. ITU-T H.222.0 ISO/IEC 13818-1	163
Table 2-142 – Section syntax for transport of ISO/IEC 14496 stream	168
Table 2-143 – ISO/IEC defined options for carriage of an ISO/IEC 14496 scene and associated streams in Rec. ITU-T H.222.0 ISO/IEC 13818-1	171
Table 2-144 – Metadata Access Unit Wrapper.....	177
Table 2-145 – Metadata AU cell.....	178
Table 2-146 – Cell fragment indication.....	178
Table 2-147 – Section syntax for transport of metadata.....	179
Table 2-148 – Section fragment indication	179
Table 2-149 – View and dependency representation delimiter NAL unit.....	188
Table 2-150 – Implied hierarchy_layer_index if no hierarchy descriptors are used.....	209
Table 2-151 – Green access unit section syntax	215
Table 2-152 – Green access unit	216
Table 2-153 – Quality Access Unit	219
Table B.1 – DSM-CC syntax	235
Table B.2 – Command_id assigned values.....	235

	Page
Table B.3 – DSM-CC control	236
Table B.4 – Select mode assigned values.....	237
Table B.5 – DSM-CC Acknowledgement	238
Table B.6 – Time code	239
Table C.1 – Composite_descriptor.....	245
Table C.2 – Sub-descriptor	245
Table C.3 – Program association table bandwidth usage (bit/s) Number of programs per transport stream	246
Table C.4 – Program map table bandwidth usage (bit/s) Number of programs per transport stream	246
Table D.1 – Re-multiplexing strategy	253
Table E.1 – PES packet header example	257
Table S.1 – J2K Access unit elementary stream header.....	288
Table S.2 – Operating levels and maximum buffer size for JPEG 2000 broadcast profiles (from Table A.49 in Rec. ITU-T T.800 (2015) ISO/IEC 15444-1:2016)	293
Table T.1 – 'codecs' parameter values for some specific stream_type values	295
Table U.1 – Variable field length notation example	297
Table U.1bis – Table U.1 in equivalent full notation.....	298
Table U.2 – TEMI access unit	298
Table U.3 – AF descriptor tags	299
Table U.4 – TEMI location descriptor	300
Table U.5 – TEMI URL scheme types.....	300
Table U.6 – TEMI service types	301
Table U.7 – TEMI base URL descriptor	301
Table U.8 – TEMI timeline descriptor	302
Table U.9 – TEMI MPEG-H_3dAudio_extStreamID descriptor	304
Table U.10 – Boundary descriptor	305
Table U.11 – sequence_number_length_code interpretation	305
Table U.12 – Labelling Descriptor.....	306
Table U.13 – label_length_code interpretation.....	306
Table U.14 – label_type values.....	306
Table U.15 – HEVC tile substream af_descriptor	307
Table W.1 – JPEG XS Access unit elementary stream header (jxes header).....	311

List of Figures

	<i>Page</i>
Figure Intro. 1 – Simplified overview of the scope of this Recommendation International Standard.....	xiii
Figure Intro. 2 – Prototypical transport demultiplexing and decoding example	xv
Figure Intro. 3 – Prototypical transport multiplexing example	xv
Figure Intro. 4 – Prototypical transport stream to program stream conversion.....	xv
Figure Intro. 5 – Prototypical decoder for program streams	xvi
Figure 2-1 – Transport stream system target decoder notation.....	16
Figure 2-2 – Program stream system target decoder notation	63
Figure 2-3 – Target background grid descriptor display area.....	84
Figure 2-4 – T-STD model extensions for individual ISO/IEC 14496 elementary streams	163
Figure 2-5 – T-STD model for ISO/IEC 14496 content.....	169
Figure 2-6 – P-STD model for ISO/IEC 14496 Systems stream	172
Figure 2-7 – Timing model for delivery of content and metadata	175
Figure 2-8 – Delivery of metadata in PES packets	176
Figure 2-9 – Metadata signalling and referencing	181
Figure 2-10 – Metadata decoding in the STD.....	182
Figure 2-11 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 video.....	186
Figure 2-12 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 video	188
Figure 2-13 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with scalable video sub-bitstreams	189
Figure 2-14 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with scalable video sub-bitstreams	192
Figure 2-15 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with MVC video sub-bitstreams	194
Figure 2-16 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with MVC video sub-bitstreams	197
Figure 2-17 – T-STD model extensions for ISO/IEC 14496-17 text streams	200
Figure 2-18 – T-STD model extensions for single layer HEVC	203
Figure 2-19 – T-STD model extensions for layered transport of HEVC temporal video subsets	204
Figure 2-20 – T-STD model extensions for bitstream-partition-specific CPB operation	207
Figure 2-21 – T-STD model extensions for transport of HEVC tiles through individual ESs.....	211
Figure 2-22 – T-STD model extensions for transport of HEVC tiles in a common ES using AF descriptors.....	213
Figure 2-23 – T-STD model extension for transport of HEVC tiles in a common ES ignoring AF descriptors	214
Figure 2-24 – T-STD model extension for green access units	217
Figure 2-25 – Transport stream system target decoder for multiple audio elementary streams.....	218
Figure 2-26 – Quality Access Unit decoder processing model.....	220
Figure 2-27 – T-STD model extensions for single layer VVC	222
Figure 2-28 – T-STD model extensions for layered transport of VVC temporal video subsets	224
Figure A.1 – 32-bit CRC decoder model.....	230
Figure B.1 – Configuration of DSM-CC application	233
Figure B.2 – BSM-CC bitstream decoded as a stand-alone bitstream	233
Figure B.3 – DSM-CC bitstream decoded as part of the system bitstream.....	234
Figure C.1 – Program and network mapping relationships	243
Figure D.1 – Constant delay model.....	248
Figure D.2 – STC recovery using PLL.....	252
Figure F.1 – Transport stream syntax diagram	258
Figure F.2 – PES packet syntax diagram.....	259
Figure F.3 – Program association section diagram	259
Figure F.4 – Conditional access section diagram	259
Figure F.5 – TS program map section diagram	260
Figure F.6 – Private section diagram.....	260
Figure F.7 – Program stream diagram.....	261
Figure F.8 – Program stream map diagram	261
Figure J.1 – Sending system streams over a jitter-inducing network.....	266
Figure J.2 – Jitter-smoothing using network-layer timestamps	266

	<i>Page</i>
Figure J.3 – Integrated dejittering and MPEG-2 decoding.....	267
Figure R.1 – Example of ISO/IEC 14496 content in a program stream	282
Figure R.2 – Example of ISO/IEC 14496 content in a transport stream.....	283
Figure R.3 – Usage of MPEG-4 in a transport stream with BIFS scene referring to native PES.....	284
Figure R.4 – Usage of MPEG-4 in a transport stream with an ODUpdate_descriptor carrying an image ObjectDescriptor in the PMT	285
Figure S.1 – Structure and order of JPEG 2000 access units	290
Figure S.2 – T-STD model extensions for J2K Video	291
Figure U.1 – Stream partitioning into 2 and 5 second segments	305
Figure V.1 – Illustration of HEVC tiled encoding of panoramic content beyond UHD.....	308
Figure V.2 – Example of HEVC tile substream identification	309
Figure V.3 – Example of subregion layout for a 3 x 3 RoI	309
Figure W.1 – Structure and order of JPEG XS access units.....	312
Figure W.2 – T-STD model extensions for JPEG XS Video	313

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 13818-1:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/c32f3099-d5e1-4224-9008-4cb585fa88c9/iso-iec-13818-1-2022>

Introduction

The systems part of this Recommendation | International Standard addresses the combining of one or more elementary streams of video and audio, as well as other data, into single or multiple streams which are suitable for storage or transmission. Systems coding follows the syntactical and semantic rules imposed by this Specification and provides information to enable synchronized decoding of decoder buffers over a wide range of retrieval or receipt conditions.

System coding shall be specified in two forms: the transport stream and the program stream. Each is optimized for a different set of applications. Both the transport stream and program stream defined in this Recommendation | International Standard provide coding syntax which is necessary and sufficient to synchronize the decoding and presentation of the video and audio information, while ensuring that data buffers in the decoders do not overflow or underflow. Information is coded in the syntax using time stamps concerning the decoding and presentation of coded audio and visual data and time stamps concerning the delivery of the data stream itself. Both stream definitions are packet-oriented multiplexes.

The basic multiplexing approach for single video and audio elementary streams is illustrated in Figure Intro. 1. The video and audio data is encoded as described in Rec. ITU-T H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3. The resulting compressed elementary streams are packetized to produce PES packets. Information needed to use PES packets independently of either transport streams or program streams may be added when PES packets are formed. This information is not needed and need not be added when PES packets are further combined with system level information to form transport streams or program streams. This systems standard covers those processes to the right of the vertical dashed line.

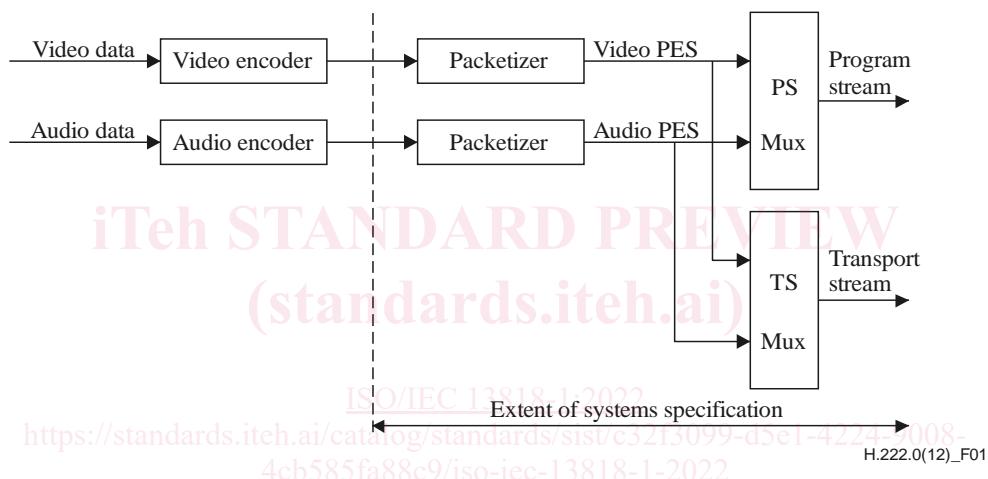


Figure Intro. 1 – Simplified overview of the scope of this Recommendation | International Standard

The program stream is analogous and similar to the ISO/IEC 11172 systems layer. It results from combining one or more streams of PES packets, which have a common time base, into a single stream.

For applications that require the elementary streams that comprise a single program to be in separate streams that are not multiplexed, the elementary streams can also be encoded as separate program streams, one per elementary stream, with a common time base. In this case the values encoded in the SCR fields of the various streams shall be consistent.

Like the single program stream, all elementary streams can be decoded with synchronization.

The program stream is designed for use in relatively error-free environments and is suitable for applications which may involve software processing of system information such as interactive multi-media applications. Program stream packets may be of variable and relatively great length.

The transport stream combines one or more programs with one or more independent time bases into a single stream. PES packets made up of elementary streams that form a program share a common timebase. The transport stream is designed for use in environments where errors are likely, such as storage or transmission in lossy or noisy media. Transport stream packets are 188 bytes in length.

Program and transport streams are designed for different applications and their definitions do not strictly follow a layered model. It is possible and reasonable to convert from one to the other; however, one is not a subset or superset of the other. In particular, extracting the contents of a program from a transport stream and creating a valid program stream is possible and is accomplished through the common interchange format of PES packets, but not all of the fields needed in a program stream are contained within the transport stream; some must be derived. The transport stream may be used to span a range of layers in a layered model, and is designed for efficiency and ease of implementation in high bandwidth applications.

The scope of syntactical and semantic rules set forth in the systems specification differs: the syntactical rules apply to systems layer coding only, and do not extend to the compression layer coding of the video and audio specifications; by contrast, the semantic rules apply to the combined stream in its entirety.

The systems specification does not specify the architecture or implementation of encoders or decoders, nor those of multiplexors or demultiplexors. However, bit stream properties do impose functional and performance requirements on encoders, decoders, multiplexors and demultiplexors. For instance, encoders must meet minimum clock tolerance requirements. Notwithstanding this and other requirements, a considerable degree of freedom exists in the design and implementation of encoders, decoders, multiplexors, and demultiplexors.

Intro. 1 Transport stream

The transport stream is a stream definition which is tailored for communicating or storing one or more programs of coded data according to Rec. ITU-T H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3 and other data in environments in which significant errors may occur. Such errors may be manifested as bit value errors or loss of packets.

Transport streams may be either fixed or variable rate. In either case the constituent elementary streams may either be fixed or variable rate. The syntax and semantic constraints on the stream are identical in each of these cases. The transport stream rate is defined by the values and locations of program clock reference (PCR) fields, which in general are separate PCR fields for each program.

There are some difficulties with constructing and delivering a transport stream containing multiple programs with independent time bases such that the overall bit rate is variable. Refer to 2.4.2.3.

The transport stream may be constructed by any method that results in a valid stream. It is possible to construct transport streams containing one or more programs from elementary coded data streams, from program streams, or from other transport streams which may themselves contain one or more programs.

The transport stream is designed in such a way that several operations on a transport stream are possible with minimum effort. Among these are:

- 1) Retrieve the coded data from one program within the transport stream, decode it and present the decoded results as shown in Figure Intro. 2.
- 2) Extract the transport stream packets from one program within the transport stream and produce as output a different transport stream with only that one program as shown in Figure Intro. 3.
- 3) Extract the transport stream packets of one or more programs from one or more transport streams and produce as output a different transport stream (not illustrated).
- 4) Extract the contents of one program from the transport stream and produce as output a program stream containing that one program as shown in Figure Intro. 4.
- 5) Take a program stream, convert it into a transport stream to carry it over a lossy environment, and then recover a valid, and in certain cases, identical program stream.

Figure Intro. 2 and Figure Intro. 3 illustrate prototypical demultiplexing and decoding systems which take as input a transport stream. Figure Intro. 2 illustrates the first case, where a transport stream is directly demultiplexed and decoded. Transport streams are constructed in two layers:

- a system layer; and
- a compression layer.

The input stream to the transport stream decoder has a system layer wrapped about a compression layer. Input streams to the video and audio decoders have only the compression layer.

Operations performed by the prototypical decoder which accepts transport streams either apply to the entire transport stream ("multiplex-wide operations"), or to individual elementary streams ("stream-specific operations"). The transport stream system layer is divided into two sub-layers, one for multiplex-wide operations (the transport stream packet layer), and one for stream-specific operations (the PES packet layer).

A prototypical decoder for transport streams, including audio and video, is also depicted in Figure Intro. 2 to illustrate the function of a decoder. The architecture is not unique – some system decoder functions, such as decoder timing control, might equally well be distributed among elementary stream decoders and the channel-specific decoder – but this figure is useful for discussion. Likewise, indication of errors detected by the channel-specific decoder to the individual audio and video decoders may be performed in various ways and such communication paths are not shown in the diagram. The prototypical decoder design does not imply any normative requirement for the design of a transport stream decoder. Indeed non-audio/video data is also allowed, but not shown.

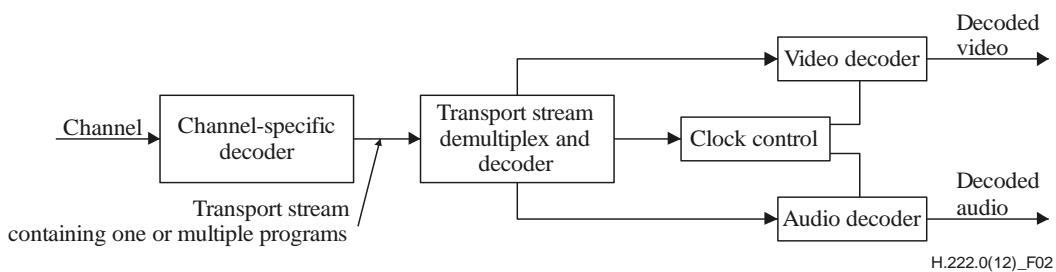


Figure Intro. 2 – Prototypical transport demultiplexing and decoding example

Figure Intro. 3 illustrates the second case, where a transport stream containing multiple programs is converted into a transport stream containing a single program. In this case the re-multiplexing operation may necessitate the correction of program clock reference (PCR) values to account for changes in the PCR locations in the bit stream.

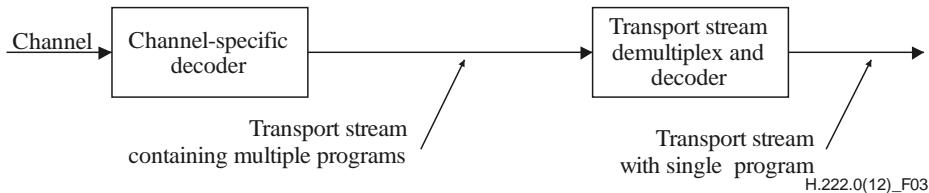


Figure Intro. 3 – Prototypical transport multiplexing example

Figure Intro. 4 illustrates a case in which a multi-program transport stream is first demultiplexed and then converted into a program stream.

Figures Intro. 3 and Intro. 4 indicate that it is possible and reasonable to convert between different types and configurations of transport streams. There are specific fields defined in the transport stream and program stream syntax which facilitate the conversions illustrated. There is no requirement that specific implementations of demultiplexors or decoders include all of these functions.

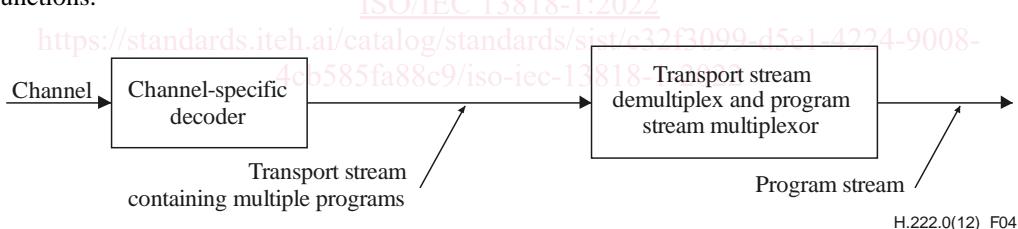


Figure Intro. 4 – Prototypical transport stream to program stream conversion

Intro. 2 Program stream

The program stream is a stream definition which is tailored for communicating or storing one program of coded data and other data in environments where errors are very unlikely, and where processing of system coding, e.g., by software, is a major consideration.

Program streams may be either fixed or variable rate. In either case, the constituent elementary streams may be either fixed or variable rate. The syntax and semantics constraints on the stream are identical in each case. The program stream rate is defined by the values and locations of the system clock reference (SCR) and mux_rate fields.

A prototypical audio/video program stream decoder system is depicted in Figure Intro. 5. The architecture is not unique – system decoder functions including decoder timing control might as equally well be distributed among elementary stream decoders and the channel-specific decoder – but this figure is useful for discussion. The prototypical decoder design does not imply any normative requirement for the design of a program stream decoder. Indeed non-audio/video data is also allowed, but not shown.