

2023-01-11

ISO/~~DIS~~DIS 4624:2022/2023(E)

ISO TC 35/SC 9/WG 31

Date: 2023-02-14

Secretariat: BSI

Paints and varnishes — Pull-off test for adhesion

Peintures et vernis — Essai de traction

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 4624

<https://standards.iteh.ai/catalog/standards/sist/a115607f-2dd8-43fb-b6fdis-4624>

Style Definition: Heading 1: Indent: Left: 0 pt, First line: 0 pt, Tab stops: Not at 21.6 pt
Style Definition: Heading 2: Font: Bold, Tab stops: Not at 18 pt
Style Definition: Heading 3: Font: Bold
Style Definition: Heading 4: Font: Bold
Style Definition: Heading 5: Font: Bold
Style Definition: Heading 6: Font: Bold
Style Definition: ANNEX
Style Definition: zzCopyright
Style Definition: Footer
Style Definition: Header
Style Definition: AMEND Terms Heading: Font: Bold
Style Definition: AMEND Heading 1 Unnumbered: Font: Bold
Style Definition: List Bullet: Indent: Left: 0 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 18 pt, List tab
Style Definition: List Bullet 2: Indent: Left: 14.15 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 32.15 pt, List tab
Style Definition: List Bullet 3: Indent: Left: 28.3 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 46.3 pt, List tab
Style Definition: List Bullet 4: Indent: Left: 42.45 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 60.45 pt, List tab
Style Definition: List Bullet 5: Indent: Left: 56.6 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 74.6 pt, List tab
Style Definition: List Number: Indent: Left: 0 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 18 pt, List tab
Style Definition: List Number 5: Indent: Left: 56.6 pt, Hanging: 18 pt, No bullets or numbering, Tab stops: 74.6 pt, List tab
Formatted: Different first page header
Formatted: English (United Kingdom)
Formatted: English (United Kingdom)
Formatted: English (United Kingdom)
Formatted: Font: Bold, English (United Kingdom)
Formatted: English (United Kingdom)
Formatted: Font: Bold
Formatted: Space After: 12 pt, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers
Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers
Formatted: Font: Bold

© ISO 20222023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO ~~copyright office~~ Copyright Office

CP 401 • ~~Ch. de Blandonnet 8~~

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Email: ~~copyright@iso.org~~

Email: ~~copyright@iso.org~~

Website: ~~www.iso.org~~ www.iso.org

Published in Switzerland.

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: No page break before, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Default Paragraph Font

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: English (United Kingdom)

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

iTech STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 4624

<https://standards.iteh.ai/catalog/standards/sist/a115607f-2dd8-43fb-b618-f94978ef2214/iso-fdis-4624>

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Contents

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Principle.....	1
5 Apparatus.....	2
6 Adhesives.....	4
7 Sampling.....	5
8 Test panels.....	5
8.1 Substrate.....	5
8.2 Preparation and coating.....	5
8.3 Drying and conditioning.....	5
8.4 Thickness of coating.....	5
9 Procedure.....	5
9.1 Number of determinations.....	5
9.2 Ambient conditions.....	5
9.3 Adhesive.....	5
9.4 Test assemblies.....	6
9.4.1 Method A: General method (using two dollies) for testing both rigid and deformable substrates.....	6
9.4.2 Method B: Method for testing from one side only, using a single dolly (suitable for rigid substrates only).....	6
9.4.3 Method C: Method using dollies, one as a painted substrate.....	7
9.5 Measurement.....	8
9.5.1 Breaking strength.....	8
9.5.2 Nature of the fracture.....	8
10 Calculation and expression of results.....	8
10.1 Breaking strength.....	8
10.2 Nature of failure.....	9
10.3 Example.....	9
11 Precision.....	9
12 Test report.....	9
Bibliography.....	11
Foreword.....	iv
Introduction.....	v
1 Scope.....	1

© ISO 2022 – All rights reserved 3

© ISO 2023 – All rights reserved

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

ISO/DIS 4624:2022/2023(E)

2	Normative references.....	1
3	Terms and definitions.....	1
4	Principle.....	2
5	Apparatus.....	2
6	Adhesives.....	6
7	Sampling.....	7
8	Test panels.....	7
8.1	Substrate.....	7
8.2	Preparation and coating.....	7
8.3	Drying and conditioning.....	7
8.4	Thickness of coating.....	7
9	Procedure.....	7
9.1	Number of determinations.....	7
9.2	Ambient conditions.....	7
9.3	Adhesive.....	8
9.4	Test assemblies.....	8
9.4.1	Method A: General method (using two dollies) for testing both rigid and deformable substrates.....	8
9.4.2	Method B: Method for testing from one side only, using a single dolly (suitable for rigid substrates only).....	9
9.4.3	Method C: Method using dollies, one as a painted substrate.....	10
9.5	Measurement.....	11
9.5.1	Breaking strength.....	11
9.5.2	Nature of the fracture.....	12
10	Calculation and expression of results.....	12
10.1	Breaking strength.....	12
10.2	Nature of failure.....	12
10.3	Example.....	13
11	Precision.....	13
12	Test report.....	13
	Bibliography.....	15

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 139, *Paints and varnishes*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This fourth edition cancels and replaces the third edition (ISO 4624:2016), which has been technically revised.

The main changes are as follows:

- Clause 3 on terms and definitions has been added;
- for the use of this method on concrete, larger dolly of up to 100 mm ~~are~~*have been* added to 5.2;
- requirement concerning the adhesive in relation to substrate or coating material has been added in Clause 6 (last sentence).
- additional information has been added to the single dolly method in 9.4.2;
- ~~the text has been editorially revised and~~ the normative references have been updated.

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Body Text, Tab stops: Not at 19.85 pt + 39.7 pt + 59.55 pt + 79.4 pt + 99.25 pt + 119.05 pt + 138.9 pt + 158.75 pt + 178.6 pt + 198.45 pt

Formatted: English (United Kingdom)

Formatted: Font: Not Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Not Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Font: Not Italic, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: cite_sec

Formatted: cite_sec

Formatted: Pattern: Clear

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

ISO/~~DIS~~ **FDIS** 4624:2022**2023**(E)

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11 pt

Formatted: English (United Kingdom)

Formatted: Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: English (United Kingdom)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 4624

<https://standards.iteh.ai/catalog/standards/sist/a115607f-2dd8-43fb-b618-f94978ef2214/iso-fdis-4624>

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

© ISO 2022 – All rights reserved

vi

© ISO 2023 – All rights reserved

Edited DIS - MUST BE USED FOR FINAL DRAFT

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11.5 pt, Font color: Custom Color(RGB(33;29;30))

Formatted: Font: 11 pt

Introduction

This document describes methods for assessing the adhesion of a single coating or a multi-coat system of paint, varnish or related product by measuring the minimum tensile stress necessary to detach or to rupture the coating in a direction perpendicular to the substrate.

The test result is influenced not only by the mechanical properties of the system under test, but also by the nature and preparation of the substrate, the method of paint application, the drying conditions of the coating, the temperature, the humidity and other factors like the type of test instrument which has been used.

ISO 2409 can also be used for the evaluation of adhesion characteristics.

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Default Paragraph Font

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 4624

<https://standards.iteh.ai/catalog/standards/sist/a115607f-2dd8-43fb-b618-f94978ef2214/iso-fdis-4624>

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Paints and varnishes — Pull-off test for adhesion

1 Scope

This document specifies three methods for determining the adhesion by carrying out a pull-off test on a single coating or a multi-coat system of paint, varnish or related product.

These methods include:

- ~~Method~~ ~~method~~ A: using two dollies, suitable for testing both rigid and deformable substrates;
- ~~Method~~ ~~method~~ B: testing from one side only, using a single dolly, suitable for rigid substrates only;
- ~~Method~~ ~~method~~ C: using dollies, one as a painted substrate.

These test methods have been found useful in comparing the adhesion behaviour of different coatings. It is most useful in providing relative ratings for a series of coated panels exhibiting significant differences in adhesion.

The test can be applied using a wide range of substrates. Different procedures are given according to whether the substrate is deformable, ~~for example~~ ~~e.g.~~ thin metal, plastics and wood, or rigid, ~~for example~~ ~~e.g.~~ thick concrete and metal plates. To avoid distortion of the substrate during the tensile test, it is common to use a sandwich construction. For example, for special purposes, the coating can be applied directly to the face of a test dolly.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- ISO 1513, *Paints and varnishes — Examination and preparation of test samples*
- ISO 1514, *Paints and varnishes — Standard panels for testing*
- ISO 2808, *Paints and varnishes — Determination of film thickness*
- ISO 3270, *Paints and varnishes and their raw materials — Temperatures and humidities for conditioning and testing*
- ISO 4618, *Paints and varnishes — Terms and definitions*
- ISO 15528, *Paints, varnishes and raw materials for paints and varnishes — Sampling*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4618 apply.

Formatted: Section start: New page, Different first page header

Formatted: Tab stops: Not at 21.6 pt

Formatted: List Continue 1, Tab stops: 19.85 pt, Left + 39.7 pt, Left + 59.55 pt, Left + 79.4 pt, Left + 99.25 pt, Left + 119.05 pt, Left + 138.9 pt, Left + 158.75 pt, Left + 178.6 pt, Left + 198.45 pt, Left

Formatted: Tab stops: Not at 21.6 pt

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

Formatted: Pattern: Clear

ISO/FDIS 4624:2023(E)

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp><https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/><https://www.electropedia.org/>

4 Principle

The product or system under test is applied at uniform thickness to flat panels of uniform surface texture.

After drying/curing the coating system, dollies are bonded directly to the surface of the coated, and cured panel using an adhesive.

After curing the adhesive, the bonded dolly assemblies are placed in a suitable tensile tester. The bonded assemblies are subjected to a controlled tensile test (pull-off test), and the force required to break the coating/substrate bond is measured.

To avoid possible distortion of the substrate during the tensile test, dollies with a diameter smaller than the 2 cm diameter used for steel substrates may be used to reduce the force introduced.

The test result is the tensile stress necessary to break the weakest interface (adhesive failure) or the weakest component (cohesive failure) of the test assembly. Mixed adhesive/cohesive failures may also occur.

Formatted: Tab stops: Not at 21.6 pt

5 Apparatus

5.1 Tensile tester, suitable for carrying out the chosen procedure specified in Clause 9. The tensile stress shall be applied in a direction perpendicular to the plane of the coated substrate and shall be increased at a substantially uniform rate, not greater than 1 MPa/s¹ such that failure of the test assembly occurs within 90 s. Suitable designs for applying the tensile stress are shown in Figures 1 and 2.

Formatted: Tab stops: Not at 21.6 pt

Formatted: Pattern: Clear

Formatted: Pattern: Clear


Instead of a tensile tester, other types of pull-off adhesion testers (mechanically, pneumatically, hydraulically or hand-driven) may be used provided that they give similar results. The type of instrument shall be reported in the test report, because hand-driven/mechanical/hydraulic instruments are reported to produce widely different results.

NOTE The results can be influenced by the test assembly used. Furthermore, the results are not reproducible unless coaxial alignment of the tensile forces is ensured.


¹ 1-MPa/s = 1-MN/(m²·s).

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

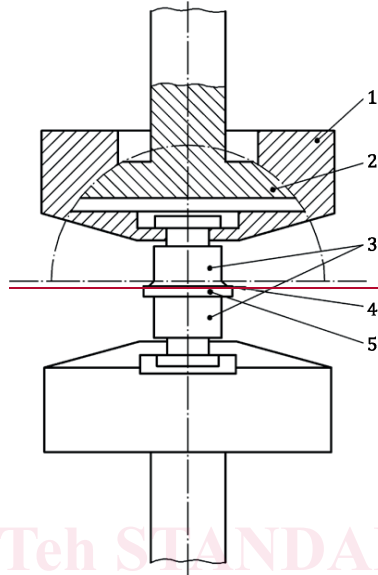

iTeh STANDARD PREVIEW
(standards.iteh.ai)

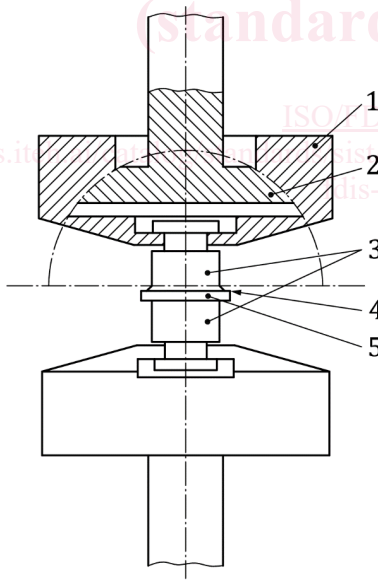

ISO 4624
https://standards.iteh.ai/catalog/standards/sist/15607f-2dd8-43fb-b618-f94978ef2214/iso-4624

Key
1 support

© ISO 2022 – All rights reserved 3

© ISO 2023 – All rights reserved

Formatted: Left, Line spacing: At least 11 pt, Don't keep with next

Formatted: Don't keep with next

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single