



# FINAL DRAFT International Standard

## ISO/FDIS 8933-1

### Ships and marine technology — Energy efficiency —

Part 1:

### Energy efficiency of individual maritime components

ISO/TC 8

Secretariat: **SAC**

Voting begins on:  
**2024-08-30**

Voting terminates on:  
**2024-10-25**

Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO/FDIS 8933-1

<https://standards.iteh.ai/catalog/standards/iso/2e75662d-67df-41ee-9037-bfa84e8ba0b1/iso-fdis-8933-1>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO/FDIS 8933-1

<https://standards.iteh.ai/catalog/standards/iso/2e75662d-67df-41ee-9037-bfa84e8ba0b1/iso-fdis-8933-1>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b>	<b>iv</b>
<b>Introduction</b>	<b>v</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
<b>4 Symbols and abbreviated terms</b>	<b>2</b>
<b>5 Method to evaluate the energy efficiency of individual maritime components</b>	<b>2</b>
5.1 General	2
5.2 Measuring conditions	3
<b>6 Pumps</b>	<b>3</b>
6.1 General	3
6.2 Definition of input and output	4
6.3 Definitions of boundaries and media	4
6.4 Calculation method	4
6.5 Measuring method	5
<b>7 Fans</b>	<b>6</b>
7.1 General	6
7.2 Definition of input and output	7
7.3 Definitions of boundaries and media	7
7.4 Calculation method	7
7.5 Measuring method	8
<b>8 Mechanical power transmission</b>	<b>9</b>
8.1 Gearboxes	9
8.1.1 General	9
8.1.2 Definition of input and output	10
8.1.3 Definitions of boundaries and media	10
8.1.4 Calculation method	10
8.1.5 Measuring method	13
<b>9 Heat exchanging</b>	<b>16</b>
9.1 General	16
9.2 Definition of input and output	16
9.3 Definitions of boundaries and media	16
9.4 Calculation method	17
9.4.1 General	17
9.4.2 Electrical heaters	17
9.5 Measuring method	18
<b>10 Centrifuges</b>	<b>19</b>
10.1 General	19
10.2 Definition of input and output	19
10.3 Definitions of boundaries and media	20
10.4 Calculation method	20
10.5 Measuring method	20
<b>Bibliography</b>	<b>22</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 8, *Ship and marine technology*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

ISO/FDIS 8933-1

<https://standards.iteh.ai/catalog/standards/iso/2e75662d-67df-41ee-9037-bfa84e8ba0b1/iso-fdis-8933-1>

## Introduction

Environmental concerns, emission regulations, fuel prices, and emission taxes are increasing the demand for greater energy efficiency in shipping. In 2013, the International Maritime Organization (IMO) adopted the Ship Energy Efficiency Management Plan (SEEMP)<sup>[1]</sup> to significantly decrease the amount of carbon dioxide (CO<sub>2</sub>) emissions by 10 % to 50 % per transport work in international shipping. This strategy refers to a pathway of CO<sub>2</sub> emissions reduction which is consistent with the goals of the Paris Agreement,<sup>[14]</sup> alongside the United Nations 2030 Agenda for Sustainable Development.<sup>[15]</sup>

Standardizing methods to evaluate energy efficiency in the maritime sector interface is valuable for a range of different stakeholders, including:

- shipowners who are looking to buy maritime systems to comply with IMO SEEMP initiatives;
- maritime equipment and engine manufacturers who are responsible for the design and production of ship systems;
- governments that are committed to environmental regulations and environmental targets such as the “levels of ambition” adopted by IMO.

The purpose of this document is to improve energy efficiency in ships by providing more energy efficient options that can be considered when replacing malfunctioning components throughout the ship lifetime.

This document allows shipowners and shipyard workers to objectively identify the most energy-efficient components for retrofits, as well as newbuilds.

The document provides a method for comparing energy performance on an objective basis to prevent energy loss and to improve cost-efficiency and environmental conditions during maritime transport. This document makes it possible for users to compare the energy efficiency of different individual maritime components based on a standardized method to measure and calculate the values.

It is a widely established that the usual combination of best efficient single systems on board do not lead in sum to the most efficient ship. It is common practice that owners instruct shipyards to meet the criteria for an optimized operating point of the respective ship system during the design phase (new build or reconstruction).

Accordingly, a shipyard checks before installation that each single system or component meets good energy efficiency values. It is not possible to calculate the ship's overall efficiency if the operating conditions are not standardized.

An example of a system or component where the efficiency depends on the operational conditions is an engine room ventilation without a given fan speed control system. If fan is designed and optimized for the tropical zone and the ship is operated under North Atlantic conditions, less power is necessary during winter times. Owing to the absence of a controller, the fan rotation speed cannot be adjusted. In sum, every single fan can operate efficiently on a test bed. An efficient performance is questionable if the ship sails under different operational conditions than what it is designed for.

To raise the overall operational energy efficiency of a ship in different operational conditions, the overall ship-individual combined system efficiency check should be performed. In addition, manufacturers, and operators should take into account the possible variations between test bed conditions and onboard test conditions when developing individual components and systems.



# Ships and marine technology — Energy efficiency —

## Part 1: Energy efficiency of individual maritime components

### 1 Scope

This document specifies generic measuring and calculation methods to evaluate the energy efficiency of individual maritime components installed on board ships, vessels for inland navigation or offshore structures. This document only covers energy consuming components for which a “unit output” can be clearly defined and which require energy to function.

This document only covers the major energy consuming components of a typical ship. It does not cover the propulsion component of the ship (e.g. the propeller).

### 2 Normative references

There are no normative references in this document.

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

#### 3.1 energy efficiency

ratio or other quantitative relationship between an *output* (3.4) of performance, service, goods or energy, and an *input* (3.3) of energy

EXAMPLE Efficiency conversion energy; energy required/energy used; output/input; theoretical energy used to operate/energy used to operate.

Note 1 to entry: Both input and output shall be clearly specified in quantity and be measurable.

[SOURCE: ISO/IEC 13273-1:2015, 3.4.1]

#### 3.2 component

element performing only one function whose efficiency is defined by the ratio between *input* (3.3) and *output* (3.4)

EXAMPLE Electric motor, water pump.

#### 3.3 input

product, material or energy flow that enters a *component* (3.2)

Note 1 to entry: Products and materials include raw materials, intermediate products and co-products.

### 3.4 output

product, material or energy flow that leaves a *component* (3.2)

Note 1 to entry: Products and materials include raw materials, intermediate products, co-products and releases.

## 4 Symbols and abbreviated terms

The following symbols are used throughout the document:

$EER$	efficiency ratio used in the heating/cooling industry	non-dimensionless
$COP$	performance coefficient used in the air conditioning industry	dimensionless
$E$	energy consumption	J
$P$	power consumption	W
$Q$	thermal energy	J
$T$	temperature	K or °C
$V$	volume	m <sup>3</sup>
$q_v$	volume flow rate	m <sup>3</sup> /s
$q_m$	mass flow rate	kg/s
$c_p$	specific heat capacity at constant pressure	J/kg K
$c_v$	specific heat capacity at constant volume	J/kg K
$h$	enthalpy	J/kg
$\eta$	efficiency ratio(dimensionless)	dimensionless
$\rho$	density of water	kg/m <sup>3</sup>
$\tau$	torque	Nm

## 5 Method to evaluate the energy efficiency of individual maritime components

### 5.1 General


This document focuses on the components responsible for the major energy consumption of a typical ship.

The component types are categorized into the following groups:

- pumps (Clause 6);
- fans (Clause 7);
- mechanical power transmission (Clause 8);
  - gearboxes (8.1);
- heat exchanging (Clause 9);
- centrifuges (Clause 10).

The energy efficiency of the component is evaluated based on its expected operational purpose on board the ship and during its expected process operating window. This means that the boundary conditions on which the component is evaluated are defined to represent the normal operational pattern. This operational pattern can include the variations in ambient conditions or variations in the ship's operational pattern. This will be defined for each of the components.

The basic terminology of a maritime component is illustrated in [Figure 5.1](#).

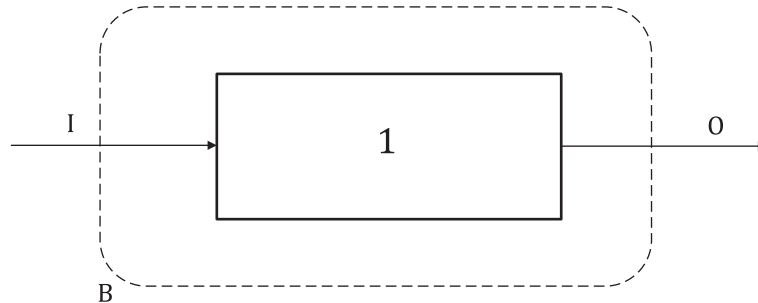

#### Key

- B boundary
- 1 component
- I input (energy, temperature, pressure, flow, concentration, force, velocity, torque, electricity)
- O output (energy, temperature, pressure, flow, concentration, force, velocity, torque, electricity)

**Figure 5.1 — Basic terminology of a maritime component**

In relation to this document in the pursuit of simplifying the energy efficiency consideration of components, it is acknowledged that some influencing parameters are ignored, however such parameters will only have a minor impact on the result and are, hence, considered negligible unless otherwise addressed.

## 5.2 Measuring conditions

The actual conditions, such as ambient air temperature and shaft speed, etc. shall be recorded on the measuring report when the parameters for the energy efficiency are measured.

The parameters shall be measured by appropriately calibrated measuring instruments.

# 6 Pumps

## 6.1 General

Pumps have a wide variety of functions on a ship. For each purpose, several pump types can be used.

This document covers the energy efficiency for the following pump types.

- Positive displacement pumps:
  - reciprocating pump (piston pumps, plunger pumps etc.);
  - rotary pump (gear pump, screw pump, vane pump, lobe pump etc.).
- Dynamic pressure pumps:
  - centrifugal pump.

## 6.2 Definition of input and output

The definitions of the inputs and outputs are made generic for all the pump types. Each pump type has its own set of properties that affect the efficiency, but these are not accounted for in this document.

[Clause 6](#) does not consider the efficiency of power production, such as electrical power, pneumatic power or hydraulic power.


The input and output of a pump component consists of the following:

- input : liquid inlet (inlet pressure and flow), pump shaft power;
- output: liquid outlet (outlet pressure and flow).

## 6.3 Definitions of boundaries and media

The boundary of a pump is set to exclude the motor and any gear. These components form a complete working pump unit, and all of these elements are necessary for a functional pump unit. Any auxiliary devices, such as mechanical seal barrier systems, are also excluded from the energy efficiency consideration.

The pump component and its boundaries are shown in [Figure 6.1](#).

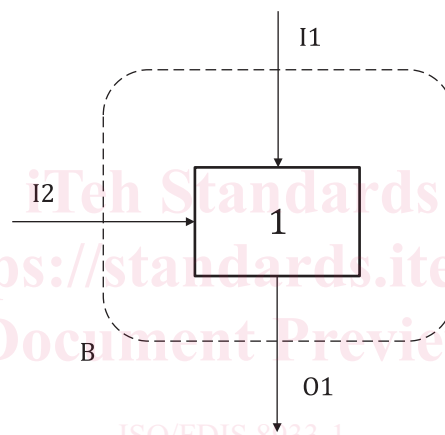

### Key

- B boundary  
 I1 liquid inlet (pump suction)  
 I2 pump shaft power  
 1 pump  
 O1 liquid outlet (pump discharge)

**Figure 6.1 — Boundaries of a pump component**

## 6.4 Calculation method

The general formula for pump efficiency, valid for all pump types, is shown in [Formula \(6.1\)](#):

$$\eta_{\text{pump}} = \frac{q_v \cdot \Delta p}{P_{\text{pump}}} \quad (6.1)$$

where

$q_v$  is the liquid flow of the pump, expressed in m<sup>3</sup>/s;

$\Delta p$  is the differential pressure – liquid outlet pressure minus liquid inlet pressure – of the pump, expressed in Pa;

$P_{\text{pump}}$  is the pump shaft power, expressed in W.

A pump can state a liquid head (or column) height expressed in metres.

The relation between liquid head and pressure is shown in [Formula \(6.2\)](#):

$$p = \rho \cdot g \cdot h \quad (6.2)$$

where

$p$  is the pressure, expressed in Pa;

$\rho$  is the density of the liquid, expressed in kg/m<sup>3</sup>;

$g$  is the gravity constant 9,81 m/s<sup>2</sup>;

$h$  is the liquid head, expressed in m.

Combining [Formulae \(6.1\)](#) and [\(6.2\)](#), the formula for efficiency of a pump can be written as [Formula \(6.3\)](#):

$$\eta_{\text{pump}} = \frac{q_v \cdot \rho \cdot g \cdot \Delta h}{P_{\text{pump}}} \quad (6.3)$$

where

$q_v$  is the liquid flow of the pump, expressed in m<sup>3</sup>/s;

$\Delta h$  is the differential head – liquid outlet head minus liquid inlet head – of the pump, expressed in m;

$\rho$  is the density of the liquid, expressed in kg/m<sup>3</sup>;

$g$  is the gravity constant 9,81 m/s<sup>2</sup>;

$P_{\text{pump}}$  is the pump shaft power, expressed in W.

## 6.5 Measuring method

To measure the pump efficiency, it is most useful to use [Formula \(6.1\)](#), rather than [Formula \(6.3\)](#), as it is easier to measure the pressure instead of head. [Formula \(6.1\)](#) is suitable for any pump type.

As it is difficult to measure the pump shaft power directly, the motor power should be measured and adjusted for the motor efficiency  $\eta_{\text{motor}}$ . This relation is shown in [Formula \(6.4\)](#)

$$P_{\text{pump}} = P_{\text{motor}} \cdot \eta_{\text{motor}} \quad (6.4)$$

If shaft power is used as input, the efficiency can be found in IEC 60034-2-1.<sup>[13]</sup>