



Designation: E 1659 – 00

Standard Test Methods for Coating Weight and Chemical Analysis of Zinc-Nickel Alloy Electrolytically Coated on Steel Sheet¹

This standard is issued under the fixed designation E 1659; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 These test methods cover independently the chemical analysis of each surface of zinc-nickel alloy electrolytically coated on steel sheet. The coatings have chemical compositions within the following limits:

Analyte	Concentration Range
Coating Weight	0.0 to 80 g/m ²
Nickel	7.0 to 17.0 %

1.2 These test methods are in the following sections:

	Sections
Coating Weight, by the Weigh-Strip-Weigh Method (20.0 to 45.0 g/m ²)	8-18
Nickel by the Atomic Absorption Method (11.0 to 13.5 % of Coating Weight Ranging from 20 to 45 g/m ²)	19-29

1.3 The values stated in SI units are to be regarded as standard. In some cases, exceptions allowed in Practice E 380 are also used.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:

- A 917 Specification for Steel Sheet, Coated by the Electrolytic Process for Applications Requiring Designation of the Coating Mass on Each Surface (General Requirements)²
- A 918 Specification for Steel Sheet, Zinc-Nickel Alloy Coated by the Electrolytic Process for Applications Requiring Designation of the Coating Mass on Each Surface²
- D 1193 Specification for Reagent Water³
- E 29 Practice for Using Significant Digits in Test Data to Determine Conformance with Specifications⁴
- E 50 Practices for Apparatus, Reagents, and Safety Precau-

- tions for Chemical Analysis of Metals⁵
- E 173 Practice for Conducting Interlaboratory Studies of Methods for Chemical Analysis of Metals⁶
- E 380 Practice for Use of the International System of Units (SI) (the Modernized Metric System)⁴
- E 663 Practice for Flame Atomic Absorption Analysis⁷
- E 882 Guide for Accountability and Quality Control in the Chemical Analysis Laboratory⁸
- E 1024 Guide for Chemical Analysis of Metals and Metal Bearing Ores by Flame Atomic Absorption Spectrophotometry⁸
- E 1452 Practice for Preparation of Calibration Solutions for Spectrophotometric and for Spectroscopic Atomic Analyses⁸

3. Significance and Use

3.1 These test methods for the chemical analysis of zinc-nickel alloy coating on sheet steel are primarily intended as referee methods to test such materials for compliance with compositional specifications such as found in Specification A 918, particularly those under the jurisdiction of ASTM Committee A-5 on Metallic Coated Iron and Steel Products. It is assumed that all who use these test methods will be trained analysts capable of performing common laboratory procedures skillfully and safely. It is expected that work will be performed in a properly equipped laboratory under appropriate quality control practices such as those described in Guide E 882.

3.2 These test methods must be applied twice, once to each side of the specimen if coating weight and composition are required for both sides of a coated sheet. Two separate specimens are required for this purpose.

4. Apparatus, Reagents, and Instrumental Practices

4.1 *Apparatus*—Specialized apparatus requirements are listed in the apparatus section in each individual test method.

4.2 Reagents:

4.2.1 *Purity of Reagents*—Unless otherwise indicated, all reagents used in these test methods shall conform to the

¹ These test methods are under the jurisdiction of ASTM Committee E-1 on Analytical Chemistry for Metals, Ores, and Related Materials and are the direct responsibility of Subcommittee E01.05 on Zn, Sn, Pb, Cd, Be, and Other Metals. Current edition approved Jan. 10, 2000. Published March 2000. Originally published as E 1659 – 95. Last previous edition E 1659 – 95.

² *Annual Book of ASTM Standards*, Vol 01.06.

³ *Annual Book of ASTM Standards*, Vol 11.01.

⁴ *Annual Book of ASTM Standards*, Vol 14.02.

⁵ *Annual Book of ASTM Standards*, Vol 03.05.

⁶ Discontinued; see *1997 Annual Book of ASTM Standards*, Vol 03.05.

⁷ Discontinued; see *1997 Annual Book of ASTM Standards*, Vol 03.06.

⁸ *Annual Book of ASTM Standards*, Vol 03.06.

Reagent Grade Specifications of the American Chemical Society.⁹ Other chemicals may be used, provided it is first ascertained that they are of sufficiently high purity to permit their use without adversely affecting the expected performance of the determination, as indicated in Section 28.

4.2.2 *Purity of Water*—References to water shall be understood to mean reagent water as defined by Type II of Specification D 1193.

4.3 *Photometric Practice*—Photometric practice prescribed in these test methods shall conform to Guide E 1024 and Practice E 1452.

5. Hazards

5.1 For precautions to be observed in the use of certain reagents and equipment in these test methods, refer to Practices E 50.

6. Sampling

6.1 *Zinc-Nickel Alloy Coated Sheets*—Samples for determining weight and composition of coating shall be secured in accordance with Specification A 917, which is referred to in Specification A 918. Test specimens shall be of squares with sides of 50 ± 5 mm. One test specimen is required for each side to be analyzed. The backside which is not to be analyzed shall be marked "X".

7. Interlaboratory Studies and Rounding Calculated Values

7.1 These test methods have been evaluated using Practice E 173, except for the update in the stripping solution, 15.1, 15.8, 18.1.2, 18.2, 29.1.1, and 29.2, as well as Tables 2, 3, 5, and 6.

7.2 Calculated values shall be rounded to the desired number of places in accordance with the rounding method of Practice E 29.

WEIGHT OF COATING ON ZINC-NICKEL ALLOY-COATED SHEET BY WEIGH-STRIP-WEIGH METHOD

8. Scope

8.1 This test method provides a procedure for determining independently the weight of coating on each surface of zinc-nickel alloy-coated sheet steel, in coating masses from 20 to 45 g/m^2 (Note 1).

NOTE 1—The upper limit of the scope has been set at 45 g/m^2 because test materials with higher coating weight were not available for testing in accordance with Practice E 173. However, recognizing the simplicity of the weigh-strip-weigh technique, materials with higher coating weights can be tested following this procedure. Users of this test method are cautioned that use of it for coating weight determinations above 45 g/m^2 is not supported by interlaboratory testing.

⁹ *Reagent Chemicals, American Chemical Society Specifications*, American Chemical Society, Washington, DC. For suggestions on the testing of reagents not listed by the American Chemical Society, see *Analar Standards for Laboratory Chemicals*, BDH Ltd., Poole, Dorset, U.K., and the *United States Pharmacopeia and National Formulary*, U.S. Pharmacopeial Convention, Inc. (USPC), Rockville, MD.

9. Summary of Test Method

9.1 The coating on the sheet steel is stripped by using hydrochloric acid solution containing an inhibitor to prevent the attack on the base steel. The coating weight is determined from the weight difference of the specimen before and after stripping.

10. Interferences

10.1 The hexamethylene tetramine inhibitor used in this test method permits the dissolution of some base metal, which could lead to higher than expected coating weight determinations. Since Zn/Ni coatings contain no appreciable amounts of Fe, the effects of this bias are corrected by determining the mass of iron stripped with the coating and subtracting that value from the raw weigh-strip-weigh data.

11. Apparatus

11.1 *Analytical Balance*, capable of weighing to 0.1 mg.

11.2 *Electroplater's Tape*, capable of protecting one side of a coated piece of sheet steel while the other side is being stripped in a hydrochloric acid solution. It must not contaminate the acid solution or interfere with the coating weight determination by gaining or losing weight.

11.3 *Vernier Calipers*, calibrated to an international standard and capable of measuring to at least 0.05 mm.

12. Reagents

12.1 *Hexamethylene Tetramine, USP Grade*—Used as an inhibitor to prevent acid attack of the base metal while stripping the coating from the base steel.

12.2 *Stripping Solution*—Add 340 mL hydrochloric acid to 1660 mL of water. Add 7.0 g of hexamethylene tetramine, mix, and cool before use.

13. Precautions

13.1 **Warning**—Hydrogen gas, which can form explosive mixtures with air, is evolved in the stripping process. Therefore, this test method should be performed under conditions of adequate ventilation, such as a fume hood.

14. Sample Preparation

14.1 Clean the specimens with acetone using a soft paper towel, then dry with oil-free compressed air.

14.2 Cover the side of the specimen from which the coating is not to be stripped with electroplater's tape.

14.3 Use a roller to press the tape firmly against the sheet, making sure to remove all air bubbles or wrinkles.

14.4 Trim off the excess tape.

14.5 Press the tape firmly near the edge to protect the taped side from acid attack.

14.6 Write the sample identification on the taped side with a marker.

15. Procedure

15.1 *Specimen Area*—Using the calipers, measure and record the length of all four sides of the test specimen.


15.1.1 Check that the measuring face and reference edge of the calipers are clean. Check that the calipers read "0" when

the measuring surface is closed. If it does not, correct the problem according to the manufacturer's instructions.

15.1.2 Place the calipers at the corners of the specimen and measure the length of each side to the nearest 0.005 cm.

15.1.3 Record the length of each side as shown in the diagram below.

NOTE 2—To ensure that the calculated area is accurate even if the specimen does not have 90° angles, all four sides are measured. In 16.2, the average of opposite sides is calculated and used to determine specimen area.

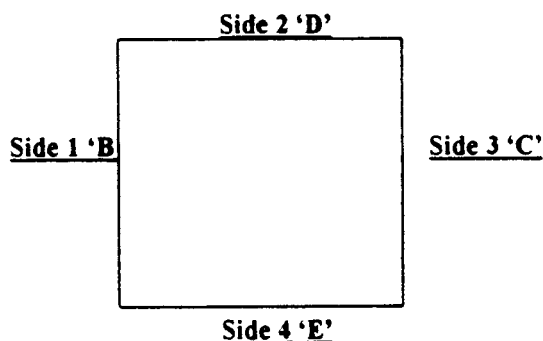

15.2 Weigh the prepared specimen to the nearest 0.1 mg and record the weight as the original weight of the specimen.

15.3 Place the sample in a 600-mL beaker with the taped side down.

15.4 Add 25 mL of stripping solution slowly. As the coating is stripped, the color changes from gray to black and back to gray (see Note 3).

NOTE 3—Stripping time will depend on the nickel composition and weight of the coating.

15.5 After the coating is stripped, remove the sample with a poly (tetrafluoroethylene) coated magnet attached to one end of an approximately 150-mm long flexible polyethylene tube. Holding it over the same beaker, rinse it carefully with water and polish the stripped side to remove the last traces of nickel.

15.6 Dry the stripped specimen with oil-free compressed air. Weigh it to the nearest 0.1 mg and record the weight.

15.7 Warm the beaker on a hotplate until all the stripped coating is dissolved. Transfer the solution to a 100-mL volumetric flask, dilute to the mark, and mix thoroughly. Reserve this sample stock solution for iron determination.

15.8 Determination of Stripped Iron:

15.8.1 Calibrate the instrument in accordance with the manufacturer's instructions following the guidelines set forth in Guide E 1024 and Practice E 1452. Choose the appropriate wavelength and calibration solutions that provide a calibration curve that includes up to 2.0 mg Fe/100 mL of solution.

15.8.2 Verify the calibration curve with an iron control solution that falls in the mid-range of the calibration curve. If this control standard is not within ±10 % of its assumed true value, identify the problem, recalibrate, and verify the curve. If the control standard is within ±10 %, analyze the solutions from 15.7 for iron.

15.8.3 After the final sample stock solution is analyzed, read the iron control standard and check that the reading is within ±10 % of the assumed true value. If it is not, identify the

problem and repeat 15.8.1-15.8.3. If it is within ±10 %, record the results of all sample solutions.

NOTE 4—The typical amount of iron stripped from the base steel when performing this test method is equivalent to a coating weight of about 1 g/m². Paragraph 15.8 allows a 10 % error in this Fe determination, which is equal to a coating weight of 0.1 g/m². On a sample with the minimum coating weight of 20 g/m², this is an error in the coating weight determination of 0.5 %. At higher coating weights, the percent error would decrease. The reproducibility of the test method by Practice E 173 at a coating weight of 20 g/m² is 1.56 g/m², or an error of 7.8 %. The error in the iron determination was considered statistically insignificant and therefore Paragraph 15.8 did not undergo a formal interlaboratory evaluation of precision and bias.

16. Calculation

16.1 Calculate the mass of the zinc-nickel alloy coating as follows:

$$M = [(W_1 - W_2) - (E/1000)] \quad (1)$$

where:

- M = mass of stripped coating, g,
- W_1 = original weight of specimen, g,
- W_2 = weight of stripped specimen, g, and
- E = iron stripped, mg.

16.2 Calculate the area of the test specimen as follows:

$$A = 2.5(B + C)(D + E) \times 10^{-5} \quad (2)$$

where:

- A = area of test specimen, m²,
- B = length of Side 1, cm,
- C = length of Side 3, cm,
- D = width of Side 2, cm, and
- E = width of Side 4, cm.

16.3 Calculate the coating weight (W_c) in g/m² as follows:

$$W_c = M/A \quad (3)$$

where:

- W_c = coating weight, g/m²,
- M = mass of stripped coating, g, from 16.1, and
- A = area of test specimen, m², from 16.2.

17. Report

17.1 Report the weight of zinc-nickel alloy coating to the nearest 1 g/m².

18. Precision and Bias ^{10,11}

18.1 Precision:

18.1.1 Ten laboratories, one of which reported a second pair of values, participated in the original testing of this test method and obtained the data summarized in Table 1. The data in Tables 2 and 3 were generated by one laboratory comparing the effectiveness of a stripping solution containing hexamethylene tetramine as a replacement for NEP312-S (used in Test Methods E 1659 – 95), an inhibitor that is no longer commercially available. Along with a revised stripping solution, this

¹⁰ Supporting data are available from ASTM Headquarters. Request RR:E01-1009.

¹¹ Supporting data are available from ASTM Headquarters. Request RR:E01-1028.