



International  
Standard

**ISO 6953-2**

**Pneumatic fluid power —  
Compressed air pressure regulators  
and filter-regulators —**

Part 2:

**Test methods to determine the  
main characteristics to include in  
supplier's literature**

*Transmissions pneumatiques — Régulateurs de pression et  
filtres-régulateurs pour air comprimé —*

*Partie 2: Méthodes d'essai pour déterminer les principales  
caractéristiques à inclure dans la documentation des fournisseurs*

**Third edition  
2024-01**

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO 6953-2:2024

<https://standards.iteh.ai/catalog/standards/iso/1a1bb0b0-63ea-4b59-a9cd-418c2a5bf5a6/iso-6953-2-2024>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b>	<b>v</b>
<b>Introduction</b>	<b>vi</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>2</b>
<b>4 Symbols and units</b>	<b>2</b>
<b>5 Test conditions</b>	<b>2</b>
5.1 Gas supply	2
5.2 Temperature	2
5.3 Pressures	3
5.4 Inlet pressure	3
5.5 Test pressures (regulated pressure)	3
<b>6 Test procedure to verify rated pressure</b>	<b>3</b>
<b>7 Flow characteristics tests</b>	<b>4</b>
7.1 Test installation	4
7.2 General requirements	5
7.3 Test procedures	6
7.3.1 Initial test procedure	6
7.3.2 Forward flow rate-pressure characteristics test	6
7.3.3 Relief flow rate-pressure characteristics test	6
7.3.4 Procedure for other regulated pressure values	7
7.4 Calculation of characteristics	7
7.4.1 Flow rate-pressure characteristic curves	7
7.4.2 Flow rate-pressure hysteresis	8
7.4.3 Maximum forward sonic conductance	8
7.4.4 Maximum relief sonic conductance	9
<b>8 Pressure regulation test</b>	<b>9</b>
8.1 Test circuit	9
8.2 Test procedure	9
<b>9 Maximum air consumption at null forward flow rate or relief flow rate for pilot-operated regulator with air bleed</b>	<b>10</b>
9.1 Test installation	10
9.2 Test procedures	10
9.3 Calculation of characteristics	10
<b>10 Special test procedures</b>	<b>11</b>
10.1 Pilot pressure/regulated pressure characteristics test in the case of external pilot-operated pressure regulators	11
10.1.1 Test installation	11
10.1.2 Test procedures	11
10.1.3 Calculation of characteristics	11
10.2 Output resolution in the case of manual air pressure regulator	13
10.2.1 Test installation	13
10.2.2 Test procedures	13
10.2.3 Calculation of characteristic	14
10.3 Resolution in case of pressure-pilot air pressure regulator	15
10.3.1 Test procedures	15
10.3.2 Calculation of characteristic	15
10.4 Sensitivity	15
10.4.1 Test procedures	15
10.4.2 Calculation of characteristic	16
10.5 Repeatability test	16

10.5.1	General	16
10.5.2	Test installation	16
10.5.3	General test method	17
10.5.4	Test execution	17
10.5.5	Calculation of the repeatability value	18
<b>11</b>	<b>Presentation of data</b>	<b>18</b>
11.1	General	18
11.2	Flow rate-pressure characteristics	18
11.3	Pressure regulation characteristics	18
11.4	Maximum air consumption for pilot operated regulators with air bleed	18
11.5	Additional characteristics for pressure-pilot air pressure regulators	18
11.6	Additional characteristics for manual air pressure regulators	19
<b>Annex A</b>	<b>(informative) Comparison of repeatability test methods for manual air pressure regulators</b>	<b>20</b>
<b>Bibliography</b>		<b>39</b>

iTeh Standards  
(<https://standards.itih.ai>)  
Document Preview

[ISO 6953-2:2024](https://standards.itih.ai/catalog/standards/iso/1a1bb0b0-63ea-4b59-a9cd-418c2a5bf5a6/iso-6953-2-2024)

<https://standards.itih.ai/catalog/standards/iso/1a1bb0b0-63ea-4b59-a9cd-418c2a5bf5a6/iso-6953-2-2024>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 5, *Control products and components*.

This third edition cancels and replaces the second edition (ISO 6953-2:2015), which has been technically revised.

The main changes are as follows:

- addition of new paragraph for an additional test for relief flow rate ([7.3.3](#));
- addition of new paragraph for a test for resolution in case of pressure-pilot air pressure regulator ([10.3](#));
- addition of new detailed test procedure for repeatability test for manual air-pressure regulator and pilot pressure air-pressure regulator ([10.5](#));
- addition of measure of the sensitivity.

A list of all parts in the ISO 6953 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

In pneumatic fluid power systems, power is transmitted and controlled through a gas under pressure within a circuit.

When pressure reduction or pressure regulation is required, regulators and filter-regulators are components designed to maintain the pressure of the gas at an approximately constant level.

It is therefore necessary to know the performance characteristics of these components in order to determine their suitability in an application.

iTeh Standards  
(<https://standards.itih.ai>)  
Document Preview

ISO 6953-2:2024

<https://standards.itih.ai/catalog/standards/iso/1a1bb0b0-63ea-4b59-a9cd-418c2a5bf5a6/iso-6953-2-2024>

# Pneumatic fluid power — Compressed air pressure regulators and filter-regulators —

## Part 2:

## Test methods to determine the main characteristics to include in supplier's literature

### 1 Scope

This document specifies test procedures and a method of presenting the results concerning the parameters which define the main characteristics to be included in the literature from suppliers of regulators and filter-regulators conforming to ISO 6953-1.

The purpose of this document is to:

- facilitate the comparison of pressure regulators and filter-regulators by standardizing test methods and presentation of test data;
- assist in the proper application of pressure regulators and filter-regulators in compressed air systems.

The tests specified are intended to allow comparison among the different types of regulators and filter-regulators; they are not production tests to be carried out on each pressure regulator or filter-regulator manufactured.

ISO 6953-3 can be used as an alternative dynamic test method for flow-rate characteristics using an isothermal tank instead of a flow meter. However, this method measures only the decreasing flow rate part of the hysteresis curve of forward flow and relief flow characteristics.

NOTE The tests related to electro-pneumatic pressure control valves are specified in ISO 10094-2.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3448, *Industrial liquid lubricants — ISO viscosity classification*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6358-1, *Pneumatic fluid power — Determination of flow-rate characteristics of components using compressible fluids — Part 1: General rules and test methods for steady-state flow*

ISO 6953-1:2024, *Pneumatic fluid power — Compressed air pressure regulators and filter-regulators — Part 1: Main characteristics to be included in literature from suppliers and product-marking requirements*

ISO 10094-1, *Pneumatic fluid power — Electro-pneumatic pressure control valves — Part 1: Main characteristics to include in the supplier's literature*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598, ISO 6358-1, ISO 6953-1 and ISO 10094-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 4 Symbols and units

The symbols and units used in this document are shown in [Table 1](#).

**Table 1 — Symbols and units**

Description	Symbol	SI unit	Practical unit
Reference atmosphere	$p_{\text{atm}}$	Pa	kPa or bar
Inlet pressure	$p_1$	Pa	kPa or bar
Regulated pressure	$p_2$	Pa	kPa or bar
Pilot pressure	$w$	Pa	kPa or bar
Forward volumetric flow rate at standard reference atmosphere	$q_{\text{vf}}$	m <sup>3</sup> /s (ANR)	dm <sup>3</sup> /min (ANR)
Relief volumetric flow rate at standard reference atmosphere	$q_{\text{vr}}$	m <sup>3</sup> /s (ANR)	dm <sup>3</sup> /min (ANR)
Sonic conductance	$C_f$	kg / (s.Pa) (ANR)	m <sup>3</sup> / (s.Pa)(ANR)
Reference temperature	$T_0$	K	°C
Inlet temperature	$T_1$	K	°C
Temperature at the regulated port	$T_2$	K	°C
Hysteresis	$H$	-	% FS
Resolution	$S$	-	% FS
Output resolution	$S_o$	-	% FS
Sensitivity	$m$	-	Pa/Pa or Pa/number of turns of control knob
Repeatability	$r$	-	% FS
<b>Key</b> ANR standard reference atmosphere (see ISO 8778) FS full scale NOTE 1 bar = 0,1 MPa = 10 <sup>5</sup> Pa; 1 MPa = 1 N/mm <sup>2</sup> .			

### 5 Test conditions

#### 5.1 Gas supply

Unless otherwise specified, testing shall be conducted with compressed air. If another gas is used, it shall be noted in the test report.

#### 5.2 Temperature

The ambient fluid and the component under test shall be maintained at 23 °C ± 10 °C during all the tests.



### 5.3 Pressures

The specified pressures shall be maintained within  $\pm 2$  %.

### 5.4 Inlet pressure

The inlet pressure used for testing shall be the lower of the following pressures:

- the maximum regulated pressure,  $p_{2,max}$ , plus 200 kPa (2 bar);
- the specified maximum inlet pressure,  $p_{1,max}$ .

### 5.5 Test pressures (regulated pressure)

The preferential test pressures are chosen as approximately equal to 20 %, 40 %, 60 %, and 80 % of the upper limit of the recommended adjustable pressure range.

## 6 Test procedure to verify rated pressure

**6.1** Perform this test on three random samples if a single-rated pressure is proposed for the entire product or on six random samples if separate ratings are proposed for the inlet and outlet sections. If the product uses a diaphragm, modify or replace it to withstand the pressure applied (diaphragms are excluded from the test criteria, but not the diaphragm support plates or any piston). Other product sealing means can be modified to prevent leakage and allow structural failure to occur during the test, but modifications shall not increase the structural strength of the pressure-containing envelope. For relieving regulators, the relieving system shall be blocked.

**6.2** Prepare the test samples as follows:

- a) If a single pressure rating is proposed for the entire product, remove the control spring and replace it with a solid spacer whose length maintains the poppet in its approximately half-open position. Close the gauge ports and the inlet port with plugs, and perform all testing by applying pressure to the outlet port. For relieving regulators, the relieving system shall be blocked.
- b) If a separate pressure rating is proposed for the inlet and outlet sections of the regulator, relieve the control spring force on three of the samples. Using a proposed pressure rating for the inlet, perform testing on the inlet port, allowing the poppet to be closed and keeping the outlet port open. Prepare the other three samples as described in [6.2 a\)](#) and test them using a proposed pressure rating for the outlet port.

**6.3** The test shall be done with a liquid which does not exceed ISO VG 32 according to ISO 3448 or with compressed air. Maintain the temperature given in [5.2](#). When using a compressible medium, exercise safety precautions to contain an explosive failure.

**6.4** After stabilizing the temperature, slowly pressurize to a level of one-half its proposed rated pressure. Hold at this level for 2 min and observe for leakage or failure, as defined in [6.5](#).

**6.4.1** For products constructed of light alloys, brass, and steel, continue raising the pressure until a level of four times the proposed rated pressure has been reached.

**6.4.2** For products constructed of zinc, die cast alloys, or plastics:

- with design operating temperatures of up to 50 °C, continue raising the pressure until a level of four times the proposed rated pressure has been reached;
- with design operating temperature between 50 °C to 80 °C, continue raising the pressure until a level of five times the proposed rated pressure has been reached.

**6.5** The criteria for a failure are: a fracture, separation of parts, or a crack, or that which can allow enough liquid to pass across the pressure-containing envelope to wet the outer surface. Leakage across the port threads shall not constitute a failure, unless caused by a fracture or a crack.

**6.6** The proposed rated pressure is verified if all three samples pass their respective tests.

**6.7** Where a unit or sub-assembly in the unit (e.g. reservoir sight glass) is constructed of different materials, the higher appropriate factor should be used. The applied pressure can be restricted to the area of the interface between the different materials.

**6.8** Where the pressure-containing envelope design is covered by a pressure vessel code in the market of sale, the requirements of that code take precedence over the requirements stated in this document.

## **7 Flow characteristics tests**

### **7.1 Test installation**


A suitable test circuit as shown in [Figure 1](#) shall be used for measuring forward or relief flow rates. This test circuit combines:

- the constant upstream pressure (in-line) test circuit, as described in ISO 6358-1 for characterizing the components with upstream and downstream pressure-measuring tubes and transition connectors (used for forward flow rate measurements), and
- the variable upstream pressure (exhaust-to-atmosphere) test circuit, as described in ISO 6358-1 (used for relief flow rate measurements).

iteh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[ISO 6953-2:2024](#)

<https://standards.iteh.ai/catalog/standards/iso/1a1bb0b0-63ea-4b59-a9cd-418c2a5bf5a6/iso-6953-2-2024>

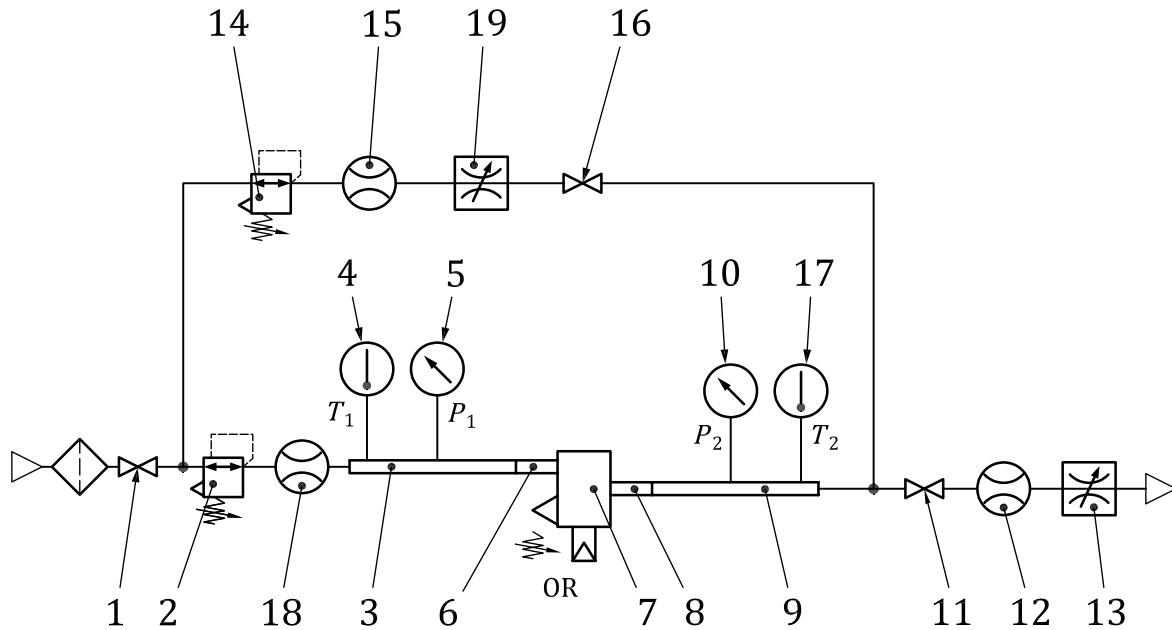

#### Key

- |  |   |
|--|---|
| 1 inlet shut-off valve                             | 11 ball valve   |
| 2 inlet pressure regulator                         | 12 forward flow meter   |
| 3 pressure-measuring tube                          | 13 flow control valve (for forward flow rates)                    |
| 4 inlet temperature, $T_1$ , measuring-element     | 14 pressure regulator (for relief flow rates)                     |
| 5 inlet pressure, $p_1$ , gauge or transducer      | 15 relief flow meter  |
| 6 transition connector                             | 16 ball valve   |
| 7 component under test                             | 17 temperature, $T_2$ , measuring-element (for relief flow rates) |
| 8 transition connector                             | 18 flow meter   |
| 9 pressure-measuring tube                          | 19 flow control valve (for relief flow rate)                      |
| 10 regulated pressure, $p_2$ , gauge or transducer |   |

NOTE Item 18 is optional for measuring forward flow rates but only for non-bleeding regulators.

**Figure 1 — Test circuit for flow rate-pressure characterization**

## 7.2 General requirements

**7.2.1** The component under test (key reference 7 in [Figure 1](#)) shall be located in the test circuit so as to connect its inlet port to the upstream transition connector and pressure-measuring tube. Its outlet port is connected to a transition connector and a pressure-measuring tube enabling a measurement of the regulated pressure,  $p_2$ . For the relief flow test, air passes through the vent passages to the atmosphere.

**7.2.2** Pressure-measuring tubes (key references 3 and 9 in [Figure 1](#)) and transition connectors (key references 6 and 8) shall be in accordance with ISO 6358-1.

**7.2.3** The components shown as 1, 2, 3, 4, 5, and 6 in [Figure 1](#) correspond to the upstream part of the test circuit used for forward flow measurements. These components shall remain in place for the relief flow rate measurements, and the inlet port of the component under test shall be pressurized from the supply circuit.

**7.2.4** Components shown as 8, 9, 10, 11, 12, and 13 in [Figure 1](#) correspond to the downstream part of the test circuit used for forward flow rate measurements.

**7.2.5** Components shown as 14, 15, 19, 16, 9, 10, 17, and 8 in [Figure 1](#) correspond to the upstream part of the test circuit used for relief flow rate measurements.

**7.2.6** The sonic conductance of the pressure regulator (2), ball valve (11) and maximal sonic conductance of the flow control valve (13) in [Figure 1](#) should each be at least twice the forward sonic conductance of the component under test. The sonic conductance of the pressure regulator (14), maximal sonic conductance of the flow control valve (19) and ball valve (16) should each be at least twice the relief sonic conductance of the component under test.

## 7.3 Test procedures

### 7.3.1 Initial test procedure

**7.3.1.1** Install the regulator according to [Figure 1](#), with shut-off valve (1), ball valves (11 and 16), and flow control valve (13) closed.

**7.3.1.2** Open shut-off valve (1) and adjust pressure regulator (2) to apply an inlet pressure,  $p_1$ , chosen according to [5.4](#). During every measurement concerning the static tests described in [7.3.2](#), [7.3.3](#), and [7.3.4](#), the inlet pressure shall be maintained within the tolerance specified in [5.3](#) [this can require constant readjustment of regulator (2)].

**7.3.1.3** Increase the set pressure on the component under test until it reaches the regulated pressure value,  $p_2$ , corresponding to 20 % of the regulated pressure full scale.

**7.3.1.4** Follow successively the procedure described in [7.3.2](#) for forward flow rates and then the procedure described in [7.3.3](#) for relief flow rates.

### 7.3.2 Forward flow rate-pressure characteristics test

**7.3.2.1** Open the ball valve (11 in [Figure 1](#)). Then, slowly open the flow control valve (13) and let a low flow rate of air pass through the component under test.

**7.3.2.2** When the flow is steady, measure the forward flow rate using the flow meter (12), the corresponding regulated pressure,  $p_2$ , using the pressure transducer (10) and the inlet temperature,  $T_1$ .

**7.3.2.3** Continue the measurements by gradually increasing the flow rate in steps, recording data after conditions in each step are stable. Continue this process until the maximum flow rate is achieved in the test circuit. Measure additional data for a decreasing forward flow rate, also in steps, until the flow is near zero (item 13 is closed). During the variations of the forward flow (increasing and decreasing), keep the inlet pressure,  $p_1$ , within the tolerance specified in [5.3](#).

### 7.3.3 Relief flow rate-pressure characteristics test

**7.3.3.1** Open completely the flow control valve (19 in [Figure 1](#)). Set the pressure regulator (14) at the same pressure value as the regulated pressure value of the component under test, obtained without flow at the end of the procedure described in [7.3.2.3](#). Close the ball valve (11) and open the ball valve (16) to apply this pressure on the outlet side of the component under test. Air can begin to flow through the relief outlet of the test regulator.

**7.3.3.2** Increase the regulated pressure slightly using the pressure regulator (14 in [Figure 1](#)). When the flow is steady, measure the relief flow using the flow meter (15), the corresponding regulated pressure,  $p_2$ , using the pressure transducer (10) and temperature,  $T_2$ .