



SLOVENSKI STANDARD SIST EN 301 427:2001

01-september-2001

GUHY Jlg_YnYa Y'g_Y'dcghUY'jb'g]ghYa]'fG9 GL!'< Ufa cb]n]fUb]'9B'nU_cdYbg_Y
a cV]bY'nYa Y'g_Y'dcghUY'f@A9 GLZ_]cVfUi ^c'j ZY_j Yb b] 'dUgcj]' %/4/8#/%
; <nZ_]nUYa UV]ghj YbY'nU h]j Y' `YbU' "&X]fY_hj YF/ HH9

Satellite Earth Stations and Systems (SES); Harmonized EN for Low data rate Land Mobile satellite Earth Stations (LMES) operating in the 11/12/14 GHz frequency bands covering essential requirements under article 3.2 of the R&TTE directive

iteh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 427:2001](https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001)

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>

Ta slovenski standard je istoveten z: **EN 301 427 Version 1.1.1**

ICS:

33.070.40 Satelit Satellite

SIST EN 301 427:2001 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 427:2001

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>

ETSI EN 301 427 V1.1.1 (2000-05)

Candidate Harmonized European Standard (Telecommunications series)

**Satellite Earth Stations and Systems (SES);
Harmonized EN for Low data rate Land Mobile
satellite Earth Stations (LMES) operating
in the 11/12/14 GHz frequency bands
covering essential requirements under article 3.2
of the R&TTE directive**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 301 427:2001](https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001)

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>



Reference

DEN/SES-000-TBR27

Keywords

satellite, earth station, LMES, regulation

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 427:2001

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	6
Foreword	6
Introduction	7
1 Scope	9
2 References	10
3 Definitions and abbreviations	10
3.1 Definitions	10
3.2 Abbreviations	11
4 Technical requirement specifications	11
4.1 Environmental profile.....	11
4.2 Conformance requirements.....	11
4.2.1 Unwanted emissions outside the band	11
4.2.1.1 Justification	11
4.2.1.2 Specification.....	12
4.2.1.3 Conformance tests	12
4.2.2 Unwanted emissions within the band.....	12
4.2.2.1 Justification	12
4.2.2.2 Specification.....	12
4.2.2.3 Conformance tests	13
4.2.3 Off-axis EIRP emissions density in the nominated bandwidth	13
4.2.3.1 Justification	13
4.2.3.2 Specification.....	13
4.2.3.3 Conformance tests	13
4.2.4 Control and Monitoring Functions (CMF)	13
4.2.4.1 Processor monitoring	13
4.2.4.1.1 Justification.....	13
4.2.4.1.2 Specification.....	14
4.2.4.1.3 Conformance tests	14
4.2.4.2 Transmit subsystem monitoring	14
4.2.4.2.1 Justification.....	14
4.2.4.2.2 Specification.....	14
4.2.4.2.3 Conformance tests	14
4.2.4.3 Power-on/Reset	14
4.2.4.3.1 Justification.....	14
4.2.4.3.2 Specification.....	14
4.2.4.3.3 Conformance tests	14
4.2.4.4 Control Channel (CC) reception.....	14
4.2.4.4.1 Justification.....	14
4.2.4.4.2 Specification.....	15
4.2.4.4.3 Conformance tests	15
4.2.4.5 Network control commands	15
4.2.4.5.1 Justification.....	15
4.2.4.5.2 Specification.....	15
4.2.4.5.3 Conformance tests	15
4.2.4.6 Initial burst transmission	15
4.2.4.6.1 Justification.....	15
4.2.4.6.2 Specification.....	16
4.2.4.6.3 Conformance tests	16
5 Testing for compliance with technical requirements	16
5.1 Environmental conditions for testing.....	16
5.2 Essential radio test suites.....	16

6	Test methods	16
6.1	General	16
6.2	Unwanted emissions outside the band 14,00 GHz to 14,25 GHz	17
6.2.1	General.....	17
6.2.2	Test site.....	17
6.2.3	Test method	17
6.2.3.1	Receive test equipment.....	18
6.2.3.1.1	Measuring receiver for measurements up to 1 000 MHz.....	18
6.2.3.1.2	Spectrum analyser for measurements above 1 000 MHz.....	18
6.2.4	Procedure.....	18
6.2.4.1	Test arrangements	18
6.2.4.2	Up to 1 000 MHz	19
6.2.4.3	Above 1 000 MHz.....	20
6.2.4.3.1	Identification of the significant frequencies of the radiated unwanted emissions	20
6.2.4.3.2	Measurement of radiated power levels of identified spurious radiation	21
6.2.4.3.3	Measurement of conducted unwanted emissions at the antenna flange	22
6.2.4.3.3.1	Test site.....	22
6.2.4.3.3.2	Procedure	22
6.3	Unwanted emissions within the band 14,00 GHz to 14,25 GHz.....	22
6.3.1	Test method	22
6.3.1.1	General.....	23
6.3.1.2	Method of measurement at the antenna flange	23
6.3.1.3	Method of measurement with a test antenna.....	24
6.4	Off-axis EIRP emissions density in the nominated bandwidth	25
6.4.1	General.....	25
6.4.2	Static rms antenna pointing accuracy.....	25
6.4.2.1	Method of measurement.....	25
6.4.3	Measurement of the off-axis EIRP without the antenna.....	26
6.4.3.1	Transmitter output power density.....	26
6.4.3.1.1	Method of measurement	26
6.4.3.2	Antenna transmit gain.....	27
6.4.3.2.1	General.....	27
6.4.3.2.2	Test site	27
6.4.3.2.3	Method of measurement	27
6.4.3.3	Antenna transmit radiation patterns.....	28
6.4.3.3.1	General	28
6.4.3.3.2	Test site	28
6.4.3.3.3	Method of measurement	29
6.4.3.4	Computation of results	29
6.4.4	Measurement of the off-axis EIRP with the antenna.....	30
6.4.4.1	General.....	30
6.4.4.2	Maximum EIRP density per 40 kHz ratio relative to the EIRP.....	30
6.4.4.2.1	Method of measurement	30
6.4.4.3	Maximum on-axis EIRP	30
6.4.4.3.1	General	30
6.4.4.3.2	Test site	30
6.4.4.3.3	Method of measurement	31
6.4.4.4	Antenna transmit radiation patterns.....	32
6.4.4.4.1	General	32
6.4.4.4.2	Test site	32
6.4.4.4.3	Method of measurement	32
6.4.4.5	Computation of results	33
6.5	Control and monitoring	33
6.5.1	General.....	33
6.5.2	Test arrangement.....	34
6.5.3	Processor monitoring	35
6.5.3.1	Test method.....	35
6.5.4	Transmit subsystem monitoring.....	35
6.5.4.1	Test method.....	35
6.5.5	Power-on/Reset.....	35

6.5.5.1	Test method.....	35
6.5.6	Control Channel (CC) reception	36
6.5.6.1	Test method.....	36
6.5.7	Network control commands	37
6.5.7.1	Test method.....	37
6.5.8	Initial burst transmission.....	38
6.5.8.1	Test method.....	38
Annex A (normative):	The EN Requirements Table (EN-RT)	39
Bibliography		40
History		41

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 427:2001](https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001)

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).


Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [3] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

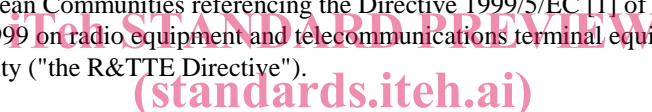

National transposition dates	
Date of adoption of this EN:	28 April 2000
Date of latest announcement of this EN (doa):	31 July 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2001
Date of withdrawal of any conflicting National Standard (dow):	31 January 2001

Introduction

ETSI has designed a modular structure for the standards. Each standard is a module in the structure. The modular structure is shown in figure 1.

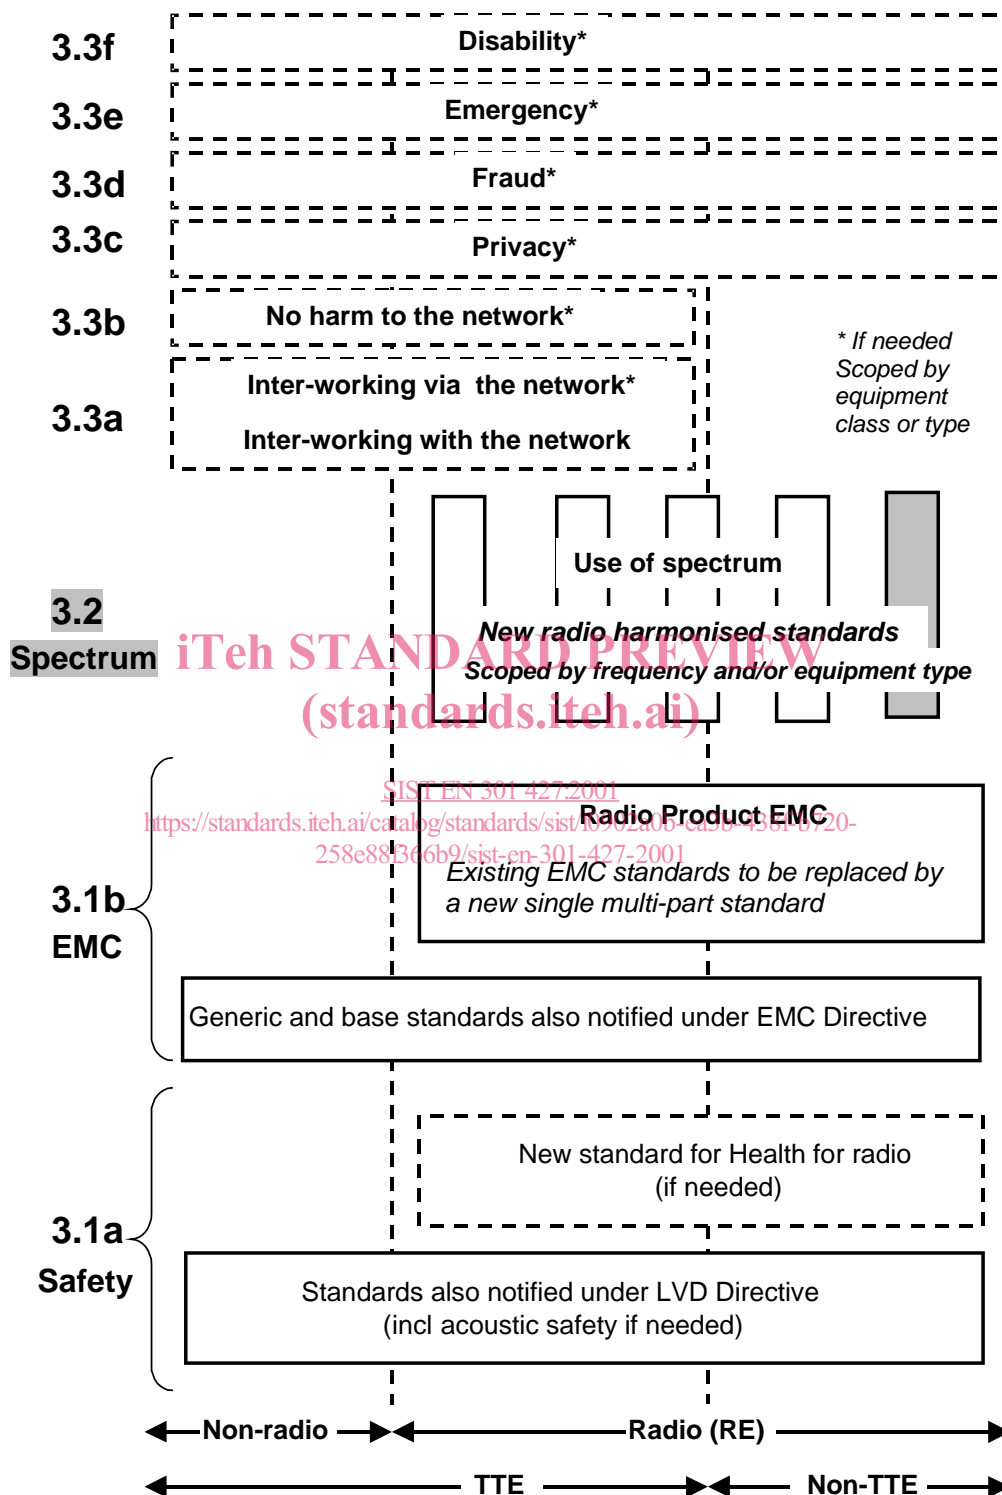


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different subclauses of Article 3 of the Directive.

For article 3.3 various horizontal boxes are shown. Their dotted lines indicate that no essential requirements in these areas have yet been adopted by the Commission. If such essential requirements are adopted, they will be elaborated in individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1(b), the diagram shows the new single multi-part product EMC standard for radio, and the existing collection of generic and base standards currently used under the EMC Directive. The parts of this new standard will become available in the second half of 2 000, and the existing separate EMC standards will be used until it is available.

For article 3.1(a) the diagram shows the existing safety standards currently used under the LVD Directive and the possibility of a new standard on health relating to radio emissions

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both.

The modular approach has been taken because:

- it minimizes the number of standards needed. Because equipment may have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions;
 without requiring alteration of standards that are already published.

The present document is based on TBR 027 [4].

The requirements have been selected to ensure an adequate level of compatibility with other radio services. The levels, however, do not cover extreme cases which may occur in any location but with a low probability of occurrence.

The present document may not cover those cases where a potential source of interference which is producing individually repeated transient phenomena or a continuous phenomenon is present, e.g. a radar or broadcast site in the near vicinity. In such a case it may be necessary to use special protection applied to either the source of interference, or the interfered part or both.

The present document does not contain any requirement, recommendation or information about the installation of the LMES.

The determination of the parameters of the user earth stations using a given geo-stationary satellite for the protections of the spectrum allocated to that satellite, is considered to be under the responsibility of the satellite operator or the satellite network operators.

1 Scope

The present document applies to Land Mobile Earth Stations (LMESs) which have the following characteristics:

- the LMES are operating in one or more frequency ranges of the Fixed Satellite Service (FSS):
 - 10,70 GHz to 11,70 GHz (space to earth);
 - 12,50 GHz to 12,75 GHz (space to earth);
 - 14,00 GHz to 14,25 GHz (earth to space).

Because the transmissions from the LMES to the Satellite in the 14,00 GHz to 14,25 GHz band fall under a secondary allocation, the transmissions should not cause harmful interference to primary services (e.g. the Fixed Satellite Service (FSS)) and at the same time cannot claim protection from harmful interference from those services.

- the LMES could be either vehicle mounted or portable equipment;
- the LMES could consist of a number of modules including a keyboard interface to the user;
- the LMES use linear polarization;
- the LMES operate through a geostationary satellite at least 3° away from any other geostationary satellite operating in the same frequency band and covering the same area;
- the antenna of the LMES may be omnidirectional or directional with a means of tracking the satellite;
- the LMES are operating as part of a satellite network used for the distribution and/or exchange of information between users;
- the LMES are controlled and monitored by a Network Control Facility (NCF). The NCF is outside the scope of the present document.

The present document applies to the LMES with its ancillary equipment and its various terrestrial ports, and when operated within the boundary limits of the operational environmental profile declared by the applicant.

The present document is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive) [1] Article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference."

In addition to the present document, other ENs that specifies technical requirements in respect of essential requirements under other parts of Article 3 of the R&TTE Directive [1] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the ETSI web site.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications equipment and the mutual recognition of their conformity.
- [2] CISPR 16-1: "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1: Radio disturbance and immunity measuring apparatus" (annex G: Validation of the open area test site for the frequency range of 30 MHz to 1 000 MHz).
- [3] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [4] TBR 027: "Satellite Earth Stations and Systems (SES); Low data rate Land Mobile satellite Earth Stations (LMES) operating in the 11/12/14 GHz frequency bands".

ITeH STANDARD PREVIEW
(standards.iteh.ai)

3 Definitions and abbreviations

SIST EN 301 427:2001

3.1 Definitions

<https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001>

For the purpose of the present document, the terms and definitions given in the R&TTE Directive [1], and the following terms and definitions apply.

applicant: manufacturer or his authorized representative within the European Community or the person responsible for placing the apparatus on the market.

carrier-off state: LMES is in this state when either it is authorized by the Network Control Facility (NCF) to transmit but when it does not transmit any signal, or when it is not authorized by the NCF to transmit.

carrier-on state: LMES is in this state when it is authorized by the NCF to transmit and when it transmits a signal.

Control Channel (CC): channel or channels by which LMES receive control information from the NCF of their network.

Environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document.

Externally Mounted Equipment (EME): EME consists of those of the modules of the Installable Equipment (IE) which are intended to be mounted externally to the vehicle as stated by the applicant.

Installable Equipment (IE): equipment which is intended to be fitted to a vehicle. An IE may consist of one or several interconnected modules.

Internally Mounted Equipment (IME): those of the modules of the IE which are not declared by the applicant as EME are defined as IME.

nominated bandwidth: bandwidth of the LMES radio frequency transmission is nominated by the applicant. The nominated bandwidth is wide enough to encompass all spectral elements of the transmission which have a level greater than the specified unwanted emissions limits. The nominated bandwidth is wide enough to take account of the transmit carrier frequency stability. The nominated bandwidth is within the transmit frequency band within which the LMES operates.

Portable Equipment (PE): PE is generally intended to be self-contained, free standing and portable. Normally, a PE would consist of a single module, but may consist of several interconnected modules.

unwanted emissions: unwanted emissions are those falling outside the nominated bandwidth.

3.2 Abbreviations

For the purpose of the present document, the following abbreviations apply:

CC	Control Channel
CMF	Control and Monitoring Functions
EIRP	Equivalent Isotropically Radiated Power
EME	Externally Mounted Equipment
EN	European Standard
EUT	Equipment Under Test
IE	Installable Equipment
IME	Internally Mounted Equipment
LMES	Land Mobile Earth Station
NCF	Network Control Facility
PE	Portable Equipment
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
rms	root mean square
STE	Special Test Equipment

SIST EN 301 427:2001

[https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-](https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001)

[258e88f366b9/sist-en-301-427-2001](https://standards.iteh.ai/catalog/standards/sist/f0902a0b-ca3b-438f-b720-258e88f366b9/sist-en-301-427-2001)

4 Technical requirement specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the applicant. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

The environmental profile for operation of the equipment shall include the ranges of humidity, temperature and supply voltage.

4.2 Conformance requirements

4.2.1 Unwanted emissions outside the band

4.2.1.1 Justification

Protection of terrestrial and satellite services from emissions caused by LMES outside the band 14,00 GHz to 14,25 GHz.