



SLOVENSKI STANDARD SIST EN 301 428:2002

01-november-2002

GUHY]lrg_YnYa Y'g_Y'dcghUY]b'g]ghYa]'fG9 GL!'< Ufa cb]n]fUb]'9B'nUgdfY'Ya bY
gUH']lrg_Y'h'fa]bUY'n'a Ub'yc'Ub'h'bc'fU G5 HL!'CcXXU'bYžcXXU'bc!gdfY'Ya bY'U]
gdfY'Ya bY'gUH']lrg_YnYa Y'g_Y'dcghUY]j 'ZY_j Yb b] 'dUgcj] '%&#&#% ; <n!'_]
nUYa UV]ghj YbY'nU h'j Y' `YbU' "&X]fY_hj YF/ HH9

Satellite Earth Stations and Systems (SES); Harmonized EN for Very Small Aperture Terminal (VSAT); Transmit-only, transmit/receive or receive-only satellite earth stations operating in the 11/12/14 GHz frequency bands covering essential requirements under article 3.2 of the R&TTE directive

(standards.iteh.ai)

[SIST EN 301 428:2002](https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002)

<https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002>

Ta slovenski standard je istoveten z: EN 301 428 Version 1.1.1

ICS:

33.060.30 Radiorelejni in fiksni satelitski komunikacijski sistemi Radio relay and fixed satellite communications systems

SIST EN 301 428:2002 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 428:2002

<https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002>

ETSI EN 301 428 V1.1.1 (2000-05)

Candidate Harmonized European Standard (Telecommunications series)

**Satellite Earth Stations and Systems (SES);
Harmonized EN for Very Small Aperture Terminal (VSAT);
Transmit-only, transmit/receive or receive-only
satellite earth stations operating
in the 11/12/14 GHz frequency bands
covering essential requirements under
article 3.2 of the R&TTE directive**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 301 428:2002](https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002)

<https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002>



Reference

DEN/SES-000-TBR28

Keywords

satellite, VSAT, regulation

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 428:2002

<https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	6
Foreword	6
Introduction	7
1 Scope	9
2 References	10
3 Definitions and abbreviations	10
3.1 Definitions	10
3.2 Abbreviations	12
4 Technical requirements specifications	12
4.1 Environmental profile	12
4.2 Conformance requirements	12
4.2.1 Off-axis spurious radiation	12
4.2.1.1 Justification	12
4.2.1.2 Specification	13
4.2.1.2.1 Transmit VSAT	13
4.2.1.2.2 Receive-only VSAT	14
4.2.1.3 Conformance tests	14
4.2.2 On-axis spurious radiation for transmit VSAT	14
4.2.2.1 Justification	14
4.2.2.2 Specification	14
4.2.2.2.1 Carrier-on state	14
4.2.2.2.2 Carrier-off state and transmission disabled state	15
4.2.2.3 Conformance tests	15
4.2.3 Off-axis EIRP emission density within the band	15
4.2.3.1 Justification	15
4.2.3.2 Specification	15
4.2.3.3 Conformance tests	16
4.2.4 Carrier suppression	16
4.2.4.1 Justification	16
4.2.4.2 Specification	16
4.2.4.3 Conformance tests	16
4.2.5 Mechanical (antenna pointing) for transmit VSAT	16
4.2.5.1 Justification	16
4.2.5.2 Specification	16
4.2.5.3 Conformance tests	16
4.2.6 Control and monitoring for transmit VSAT	17
4.2.6.1 Control and Monitoring Functions (CMF)	17
4.2.6.1.1 General	17
4.2.6.1.2 CMF state transition diagram	17
4.2.6.1.3 Specification of states	18
4.2.6.2 Control Channels (CC)	19
4.2.6.2.1 Justification	19
4.2.6.2.2 Specification	19
4.2.6.2.3 Conformance tests	19
4.2.6.3 Self monitoring functions	20
4.2.6.3.1 General	20
4.2.6.3.2 Processor monitoring	20
4.2.6.3.2.1 Justification	20
4.2.6.3.2.2 Specification	20
4.2.6.3.2.3 Conformance tests	20
4.2.6.3.3 Transmit subsystem monitoring	20
4.2.6.3.3.1 Justification	20

4.2.6.3.3.2	Specification	20
4.2.6.3.3.3	Conformance tests.....	20
4.2.6.3.4	VSAT transmission validation.....	21
4.2.6.3.4.1	General.....	21
4.2.6.3.4.2	VSAT transmission validation by the CCMF.....	21
4.2.6.3.4.2.1	Justification	21
4.2.6.3.4.2.2	Specification.....	21
4.2.6.3.4.2.3	Conformance tests	21
4.2.6.3.4.3	VSAT transmission validation by receiving station(s).....	21
4.2.6.3.4.3.1	Justification	21
4.2.6.3.4.3.2	Specification.....	21
4.2.6.3.4.3.3	Conformance tests	21
4.2.6.3.4.4	Transmission validation for VSAT using external CC.....	22
4.2.6.3.4.4.1	Purpose.....	22
4.2.6.3.4.4.2	Specification.....	22
4.2.6.3.4.4.3	Conformance tests	22
4.2.6.4	Reception of commands from the CCMF.....	22
4.2.6.4.1	General	22
4.2.6.4.2	Disable message	22
4.2.6.4.2.1	Justification.....	22
4.2.6.4.2.2	Specification	22
4.2.6.4.2.3	Conformance tests.....	22
4.2.6.4.3	Enable Message.....	22
4.2.6.4.3.1	Justification.....	22
4.2.6.4.3.2	Specification	22
4.2.6.4.3.3	Conformance tests.....	22
4.2.6.5	Power-on/Reset.....	23
4.2.6.5.1	Justification.....	23
4.2.6.5.2	Specification.....	23
4.2.6.5.3	Conformance tests	23
5	Testing for compliance with technical requirements.....	23
5.1	Environmental conditions for testing.....	23
5.2	Essential radio test suites.....	23
6	Test methods for the complete VSAT.....	23
6.1	General	23
6.2	Off-axis spurious radiation	24
6.2.1	Test method	24
6.2.1.1	General.....	24
6.2.1.2	Up to 1 000 MHz	25
6.2.1.2.1	Test site	25
6.2.1.2.2	Measuring receivers.....	25
6.2.1.2.3	Procedure.....	25
6.2.1.3	Above 1 000 MHz.....	26
6.2.1.3.1	General	26
6.2.1.3.2	Identification of the significant frequencies of spurious radiation	26
6.2.1.3.2.1	Test site	26
6.2.1.3.2.2	Procedure	26
6.2.1.3.3	Measurement of radiated power levels of identified spurious radiation	26
6.2.1.3.3.1	Test site	26
6.2.1.3.3.2	Procedure	27
6.2.1.3.4	Measurement of conducted spurious radiation at the antenna flange.....	28
6.2.1.3.4.1	Test site	28
6.2.1.3.4.2	Procedure	28
6.3	On-axis spurious radiation.....	28
6.3.1	Test method	28
6.3.1.1	Test site	28
6.3.1.2	Method of measurement.....	29
6.3.1.2.1	General	29
6.3.1.2.2	Method of measurement at the antenna flange.....	29

6.3.1.2.3	Method of measurement with a test antenna	30
6.4	Off-axis EIRP emission density within the band	31
6.4.1	Test method	31
6.4.1.1	General	31
6.4.1.2	Transmit output power density	31
6.4.1.2.1	General	31
6.4.1.2.2	Test site	31
6.4.1.2.3	Method of measurement	31
6.4.1.3	Antenna transmit gain.....	32
6.4.1.3.1	General	32
6.4.1.3.2	Test site	32
6.4.1.3.3	Method of measurement	32
6.4.1.4	Antenna transmit radiation patterns.....	33
6.4.1.4.1	General	33
6.4.1.4.2	Test site	33
6.4.1.4.3	Test arrangement	33
6.4.1.4.4	Copolar radiation pattern - azimuth.....	34
6.4.1.4.5	Copolar radiation pattern - elevation	34
6.4.1.4.6	Crosspolar radiation pattern - azimuth.....	35
6.4.1.4.7	Crosspolar radiation pattern - elevation.....	35
6.4.2	Computation of results.....	36
6.5	Carrier suppression.....	36
6.5.1	Test method	36
6.6	Antenna pointing for transmit VSAT	36
6.6.1	Test method	36
6.7	Control and monitoring for transmit VSAT.....	37
6.7.1	General.....	37
6.7.2	Test arrangement.....	37
6.7.3	Control Channels (CC)	38
6.7.3.1	Test method.....	38
6.7.3.1.1	Test method for internal CC.....	38
6.7.3.1.2	Test method for external CC.....	38
6.7.4	Processor monitoring	39
6.7.4.1	Test method.....	39
6.7.5	Transmit subsystem monitoring	39
6.7.5.1	Test method.....	39
6.7.6	VSAT transmission validation	39
6.7.6.1	Test method for VSAT validation by the CCMF for VSAT using internal CC.....	39
6.7.6.2	Test method for VSAT validation by receiving station(s) for VSAT using internal CC.....	39
6.7.6.3	Test method for transmission validation for VSAT using external CC	40
6.7.7	Reception of commands from the CCMF	40
6.7.7.1	Test method.....	40
6.7.8	Power-on/Reset.....	40
6.7.8.1	Test method.....	40
7	Test methods for modified VSAT.....	41
7.1	General	41
7.2	Antenna subsystem replacement.....	41
Annex A (normative):	The EN Requirements Table (EN-RT)	42
Annex B (informative):	Pointing stability methodology	43
Bibliography		44
History		45

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).


Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [3] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

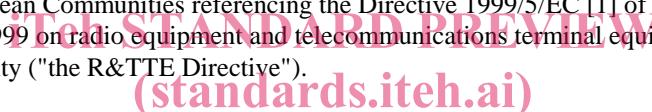

National transposition dates	
Date of adoption of this EN:	28 April 2000
Date of latest announcement of this EN (doa):	31 July 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 January 2001
Date of withdrawal of any conflicting National Standard (dow):	31 January 2001

Introduction

ETSI has designed a modular structure for the standards. Each standard is a module in the structure. The modular structure is shown in figure 1.

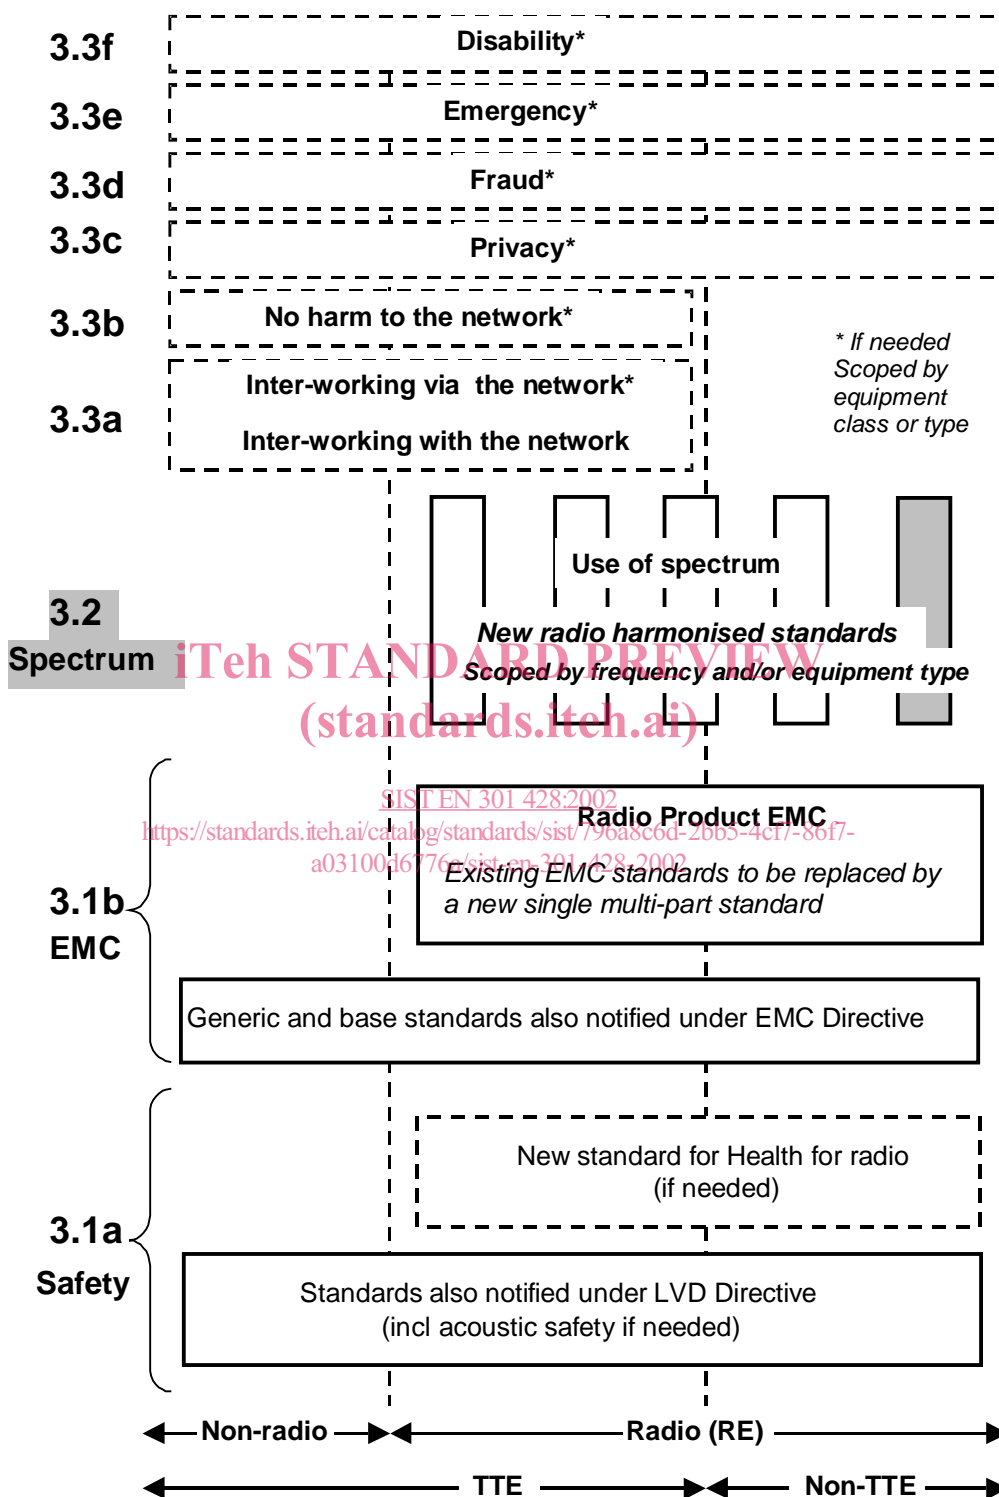


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different subclauses of Article 3 of the Directive.

For article 3.3 various horizontal boxes are shown. Their dotted lines indicate that no essential requirements in these areas have yet been adopted by the Commission. If such essential requirements are adopted, they will be elaborated in individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1(b), the diagram shows the new single multi-part product EMC standard for radio, and the existing collection of generic and base standards currently used under the EMC Directive. The parts of this new standard will become available in the second half of 2 000, and the existing separate EMC standards will be used until it is available.

For article 3.1(a) the diagram shows the existing safety standards currently used under the LVD Directive and the possibility of a new standard on health relating to radio emissions

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both.

The modular approach has been taken because:

- it minimizes the number of standards needed. Because equipment may have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment.
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions;
 without requiring alteration of standards that are already published.

The present document is based on TBR 028 [4].

The determination of the parameters of the user earth stations using a given geo-stationary satellite for the protection of the spectrum allocated to that satellite, is considered to be under the responsibility of the satellite operator or the satellite network operators. For this reason the requirement on the cross polarization discrimination which was in TBR 28 [4] has not been copied in the present document and intermodulation limits inside the band 14,0 GHz to 14,5 GHz are to be determined by system design and are subject to satellite operator specifications.

The requirements have been selected to ensure an adequate level of compatibility with other radio services. The levels, however, do not cover extreme cases which may occur in any location but with a low probability of occurrence.

The present document may not cover those cases where a potential source of interference which is producing individually repeated transient phenomena or a continuous phenomenon is present, e.g. a radar or broadcast site in the near vicinity. In such a case it may be necessary to use special protection applied to either the source of interference, or the interfered part or both.

The present document does not contain any requirement, recommendation or information about the installation of the VSAT.

1 Scope

The present document applies to Very Small Aperture Terminals (VSATs) which have the following characteristics:

- the VSAT are operating in one or more frequency ranges in the part of the following bands allocated exclusively to the Fixed Satellite Services (FSS):
 - 14,00 GHz to 14,25 GHz (earth-to-space);
 - 12,50 GHz to 12,75 GHz (space-to-earth);
 or in the shared parts of the following bands, allocated to the FSS and Fixed Services (FS):
 - 14,25 GHz to 14,50 GHz (earth-to-space);
 - 10,70 GHz to 11,70 GHz (space-to-earth).
- the VSAT use linear polarization.
- the VSAT operate through a geostationary satellite at least 3° away from any other geostationary satellite operating in the same frequency band and covering the same area.
- the VSAT antenna diameter does not exceed 3,8 m, or equivalent corresponding aperture.
- the VSAT are either:
 - transmit only VSAT: designed for transmission only of radio-communications signals in any of the frequency bands (earth-space) specified above; or
 - transmit and receive VSAT: designed for transmission and reception of radio-communications signals in any of the frequency bands specified above; or
 - receive only VSAT: designed for reception only of radio-communications signals in any of the frequency bands (space-earth) specified above.
- the VSAT are designed usually for unattended operation.
- the VSAT are operating as part of a satellite network (e.g. star, mesh or point-to-point) used for the distribution and/or exchange of information between users.
- the VSAT are controlled and monitored by a Centralized Control and Monitoring Function (CCMF). The CCMF is outside the scope of the present document.

The present document applies to the VSAT with its ancillary equipment and its various terrestrial ports, and when operated within the boundary limits of the operational environmental profile declared by the applicant.

The present document is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive) Article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specifies technical requirements in respect of essential requirements under other parts of Article 3 of the R&TTE Directive [1] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the ETSI web site.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications equipment and the mutual recognition of their conformity.
- [2] CISPR 16-1: "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1: Radio disturbance and immunity measuring apparatus" (annex G: Validation of the open area test site for the frequency range of 30 MHz to 1 000 MHz).
- [3] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [4] TBR 028: "Satellite Earth Stations and Systems (SES); Very Small Aperture Terminal (VSAT); Transmit-only, transmit/receive or receive-only satellite earth stations operating in the 11/12/14 GHz frequency bands".

(standards.iteh.ai)

3 Definitions and abbreviations

<https://standards.iteh.ai/catalog/standards/sist/796a8c6d-2bb5-4cf7-86f7-a03100d6776a/sist-en-301-428-2002>

3.1 Definitions

For the purpose of the present document, the terms and definitions given in the R&TTE Directive [1], and the following terms and definitions apply.

ancillary equipment: equipment used in connection with a VSAT is considered as ancillary if the three following conditions are met:

- a) the equipment is intended for use in conjunction with the VSAT to provide additional operational and/or control features (e.g. to extend control to another position or location); and
- b) the equipment cannot be used on a stand alone basis, to provide user functions independently of the VSAT; and
- c) the absence of the equipment does not inhibit the operation of the VSAT.

applicant: manufacturer or his authorized representative within the European Community or the person responsible for placing the apparatus on the market.

carrier-off state: VSAT is in this state when it is authorized by the Centralized Control and Monitoring Functions (CCMF) to transmit, but when it does not transmit any signal.

NOTE 1: The existence of a carrier-off state depends on the system of transmission used. For VSAT designed for continuous transmission mode there may be no carrier-off state.

carrier-on state: VSAT is in this state when it is authorized by the CCMF to transmit and when it transmits a signal.

Centralized Control and Monitoring Functions (CCMF): set of functional entities that, at system level, monitor and control the correct operation of all transmit VSAT in a network.

Control Channel (CC): channel or channels by which VSAT receive control information from the CCMF.

Environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document.

external control channel: control channel which is either (i) carried by the VSAT network via the same or another satellite, but not within the internal protocol of the VSAT system, or (ii) carried by the PSTN or some other means.

external response channel: response channel which is either (i) carried by the VSAT network via the same or another satellite, but not within the internal protocol of the VSAT system, or (ii) carried by the PSTN or some other means.

indoor unit: is composed of that part of the VSAT which is not part of the outdoor unit. It is generally installed inside a building and is connected to the outdoor unit. The connection cable between the outdoor and indoor unit is considered part of the indoor unit.

integral antenna: antenna which may not be removed during the tests according to the applicant's statement.

internal control channel: control channel which is carried by the VSAT network via the same satellite as used for transmission of user data and within the internal protocol structure of the VSAT system.

internal response channel: response channel which is carried by the VSAT network via the same satellite as used for transmission of user data and within the internal protocol structure of the VSAT system.

network: in the present document a network is any network configuration including star, mesh and point-to-point configurations.

nominated bandwidth: bandwidth of the VSAT radio frequency transmission is nominated by the applicant. The nominated bandwidth is centred on the transmit frequency and does not exceed 5 times the occupied bandwidth.

NOTE 2: The nominated bandwidth is wide enough to encompass all spectral elements of the transmission which have a level greater than the specified spurious radiation limits. The nominated bandwidth is wide enough to take account of the transmit carrier frequency stability. This definition is chosen to allow flexibility regarding adjacent channel interference levels which will be taken into account by operational procedures depending on the exact transponder carrier assignment situation.

occupied Bandwidth (Bo): for a digital modulation scheme - the width of the signal spectrum 10 dB below the maximum inband density. For an analogue modulation scheme - the width of a frequency band such that, below the lower and above the upper frequency limits, the mean power emitted is equal to 0,5 % of the total mean power of the emission.

outdoor unit: part of the VSAT intended to be installed outdoor, as declared by the applicant, or as indicated in the user documentation.

The outdoor unit usually comprises three main parts:

- a) the antenna sub-system which converts the incident radiation field into a guided wave and vice versa;
- b) the Low Noise Block (LNB) down converter, which is a device that amplifies, with very low internal noise, the received signals in the Radio Frequency (RF) band and converts them to intermediate frequencies;
- c) the upconverter and the power amplifier which convert from the intermediate frequency to RF and amplify the low level RF signals for transmission through the antenna subsystem.

NOTE 3: The installation equipment (means of attachment) is outside the scope of the present document. However, the antenna structures and other components directly mounted on the antenna and forming an integral part of it, are subject to the specifications of the present document.

removable antenna: antenna which may be removed during the tests according to the applicant's statement.

Response Channel (RC): channel by which VSAT transmit monitoring information to the CCMF.

spurious radiation: any radiation outside the nominated bandwidth.

NOTE 4: For a receive-only VSAT there is no nominated bandwidth therefore any radiation is a spurious radiation.