



Standard Test Method for Field Measurement of Raised Retroreflective Pavement Markers Using a Portable Retroreflectometer¹

This standard is issued under the fixed designation E 1696; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the measurement of the retroreflective properties of raised retroreflective pavement markers at a prescribed geometry, by means of a portable retroreflectometer that can be used in the field. The measurements can be compared to minimum requirements to determine the need for replacement.

1.2 The observation angle specified for retroreflectometers in this test method is that currently specified for raised pavement markers in the United States and may differ from the angles used elsewhere. For other jurisdictions, replace the observations angle specified herein with the observation angle specified by the pertinent agency.

1.3 This test method is intended to be used for field measurement of raised retroreflective pavement markers but may also be used to measure the performance of new markers before they are placed in the field.

1.4 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.5 *The standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use*

2. Referenced Documents

2.1 ASTM Standards:

E 284 Terminology of Appearance²

E 809 Practice for Measuring Photometric Characteristics of Retroreflectors²

3. Terminology

3.1 The terms and definitions in Terminology E 284 are applicable to this test method.

3.2 *Definitions—The delimiting phrase “in retroreflection” applies to each of the following definitions when used outside the context of this or other retroreflection standards:*

¹ This test method is under the jurisdiction of ASTM Committee E12 on Color and Appearance and is the direct responsibility of Subcommittee E12.10 on Retroreflection.

Current edition approved Oct. 10, 1995. Published December 1995. Originally published as E 1696 – 95. Last previous edition E 1696 – 95a.

² *Annual Book of ASTM Standards*, Vol 06.01.

3.2.1 *coefficient of luminous intensity, R_1 , n* —of a retroreflector, ratio of the luminous intensity (I) of the retroreflector in the direction of observation to the illuminance ($E|nt$) at the retroreflector on a plane perpendicular to the direction of incident light, expressed in candelas per lux ($cd \cdot lx^{-1}$).

3.2.1.1 *Discussion*—When values are low, the coefficient of (retroreflected) luminous intensity may be given in millicandelas per lux ($mcd \cdot lx^{-1}$). $R_1 = (I/E|nt)$.

3.2.2 *entrance angle, n* —angle between the illumination axis and the retroreflector axis.

3.2.3 *illumination axis, n* —line from the effective center of the source aperture to the retroreflector center.

3.2.4 *observation angle, α , n* —the angle between the illumination axis and the observation axis.

3.2.5 *portable retroreflectometer*—a hand-held instrument that can be used in the field or in the laboratory for measurement of retroreflectance.

3.2.5.1 *Discussion*—In this test method, “portable retroreflectometer” refers to a hand-held instrument that can be placed over a raised retroreflective pavement marker to measure the coefficient of luminous intensity with a prescribed geometry.

3.2.6 *instrument standard, n* —a working standard used to standardize the portable retroreflectometer.

3.2.7 *retroreflection, n* —reflection in which the reflected rays are preferentially returned in directions close to the opposite of the direction of the incident rays, this property being maintained over wide variations of the direction of the incident rays.

3.2.8 *retroreflective element, n* —one optical unit which by refraction or reflection or both produces the phenomenon of retroreflection.

4. Summary of Test Method


4.1 This test method involves the use of commercial portable retroreflectometers for determining the coefficient of luminous intensity of pavement markers.

4.2 Entrance angle β_1 shall be between 0 and 2°, entrance angle β_2 shall be $0 \pm 2^\circ$.

4.3 Unless otherwise specified by the user, the observation angle shall be $0.2^\circ \pm 0.01^\circ$.

4.4 The observation half plane shall be vertical. Rotation angle shall be 0° (see Fig. 1 and Fig. 2).

4.5 The sum of the aperture angles of source plus receiver shall be $0.2^\circ \pm 0.04^\circ$ (see Table 1 of Practice E 809).

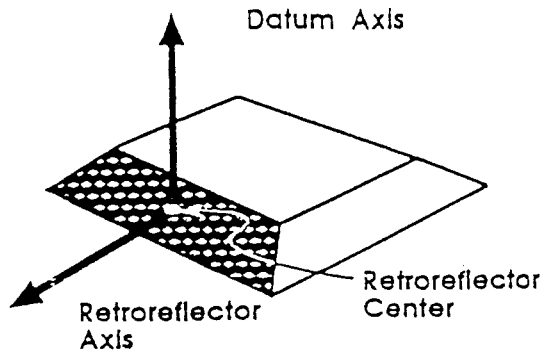

Location of retroreflector axis, datum axis and retroreflector center for use in testing raised pavement markers.

Retroreflector Center-located on the surface of the effective retroreflective area, centered both vertically and horizontally.

Retroreflector Axis-extends parallel to the road surface from retroreflector center.

Datum Axis-extends vertically from the road surface plane starting at retroreflector center.

FIG. 1 Position of Marker for Photometry

Maximum system sensitivity is obtained when aperture angles of source and receiver are equal.

4.6 The aperture angle of an individual retroreflective element shall be 0.02° max (see Practice E 809). For a portable photometer this aperture angle can be achieved by interposing a collimating lens in the illumination and observation axes.

4.7 A portable standard shall be used for standardization.

4.8 After standardization place the retroreflectometer directly over the marker to be tested making sure that the road-axis marking on the retroreflectometer is parallel to the lane line of the road.

4.9 The reading displayed by the retroreflectometer is recorded. The retroreflectometer is removed from the marker, then replaced and the reading recorded again. If the difference in readings is greater than 10 %, the process is to be repeated a third time.

5. Significance and Use

5.1 Measurements of R_f made by this test method are related to visual observation of raised retroreflective pavement markers at distances of approximately 152 m (500 ft) for cars or approximately 304 m (1000 ft) for trucks when illuminated by tungsten filament light sources such as car headlights.

5.2 The coefficient of luminous intensity of raised retroreflective pavement markers degrades with traffic wear and requires periodic measurement to ensure that sufficient visibility is provided to the driver.

5.3 The quality of the pavement markers as to materials used, age and wear pattern, will have an effect on the

coefficient of (retroreflected) luminous intensity. These conditions need to be observed and noted by the user.

6. Apparatus

6.1 Portable Retroreflectometer:

6.1.1 The retroreflectometer shall be portable with the capability of being positioned over markers installed on the roadway surface.

6.1.2 The retroreflectometer shall be constructed so that placement on the road will preclude any stray light from entering the area being tested under daylight conditions.

6.1.3 The retroreflectometer shall be constructed so that it can be placed over the marker with the illumination axis parallel to the road surface.

6.1.4 The combined spectral distribution of the light source and the spectral responsivity of the receiver shall match the *combined spectral distribution of CIE Illuminant A* and the $V(\lambda)$ spectral luminosity function according to the following criterion: for any choice of plano parallel colored absorptive filter mounted in front of a white retroreflective sample, the ratio of the R_f measured with the filter to the R_f measured without the filter shall be within 10 % of the Illuminant A luminous transmittance of an air-spaced pair of two such filters.

NOTE 1—In the retroreflectometer the filter should be mounted with a downward tilt (for example, 1.0°) for avoiding specular reflection into the receiver.

6.1.5 When using a standard similar in color, material, and type to the sample, measured R_f shall not deviate by more than 10 % from measurements made on a laboratory photometer conforming to Practice E 809 with observation angle, α , as specified and $\beta_1 = \beta_2 = \epsilon = 0^\circ$.

6.1.6 If, for convenience, the user chooses to use a white standard for all markers, a correction factor shall be applied to the readings obtained with the white standard. To determine the correction factor, (1) standardize the instrument using a white standard; (2) without changing the instrument settings, note the reading for a selected prephotometered standard similar in color, material, and type to the markers to be tested; and (3) divide the known retroreflectance of the selected prephotometered standard by the reading noted in (2). Multiply all readings obtained for markers of a particular color, material, and type by the correction factor obtained for that color, material, and type.

6.1.7 For the convenience of the user, a road-axis marking shall be placed on the instrument to permit it to be aligned with the direction of traffic.

6.2 Light Source Requirements:

6.2.1 The projection optics shall be such that the illuminance over the entire test area shall be within 10 % of the average illuminance.

6.2.2 The source shall be regulated such that the illumination of the test area does not change by more than $\pm 1\%$ for the duration of the test.

6.3 Receiver Requirements:

6.3.1 The receiver shall have sufficient sensitivity and range to accommodate coefficient of luminous intensity values expected in use, typically 1 to $1999 \text{ mcd}\cdot\text{lx}^{-1}$.