



# FINAL DRAFT

## International Standard

### ISO/SAE FDIS 12906

## Road vehicles — Test procedures for electric vehicles to determine charging performance

*Véhicules routiers — Procédures d'essai des véhicules électriques  
pour déterminer les performances de charge*

ISO/TC 22/SC 37

Secretariat: DIN

Voting begins on:  
**2024-08-27**

Voting terminates on:  
**2024-10-22**

Document Preview

[ISO/SAE FDIS 12906](https://standards.iteh.ai/catalog/standards/iso/e99f1c15-17da-4dc4-ad68-ffc670e34496/iso-sae-fdis-12906)

<https://standards.iteh.ai/catalog/standards/iso/e99f1c15-17da-4dc4-ad68-ffc670e34496/iso-sae-fdis-12906>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO/SAE FDIS 12906

<https://standards.iteh.ai/catalog/standards/iso/e99f1c15-17da-4dc4-ad68-ffc670e34496/iso-sae-fdis-12906>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/SAE International 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced, or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO or SAE International at the respective address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11

Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

SAE International  
400 Commonwealth Dr.  
Warrendale, PA, USA 15096  
Phone: 877-606-7323 (inside USA and Canada)  
Phone: +1 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [CustomerService@sae.org](mailto:CustomerService@sae.org)  
Website: [www.sae.org](http://www.sae.org)

Published in Switzerland by ISO, published in the USA by SAE International

# Contents

Page

<b>Foreword</b>	<b>iv</b>
<b>Introduction</b>	<b>v</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
<b>4 Abbreviated terms</b>	<b>3</b>
<b>5 General</b>	<b>3</b>
<b>6 Test cases and general requirements</b>	<b>4</b>
6.1 Overview of test cases	4
6.2 General requirements	4
6.2.1 Vehicle manufacturer specifications	4
6.2.2 EV run-in	5
6.2.3 Measurement tolerances and accuracies	5
6.2.4 Determination of indicated SOC	5
6.2.5 Determination of recharged electric range by recharged energy	6
6.2.6 Determination of charging efficiency	8
6.2.7 Determination of maximum charging power	9
6.3 Test procedures	10
6.3.1 Test procedure for test case normal charging	10
6.3.2 Test procedure for test case fast charging	11
<b>7 Vehicle operator information</b>	<b>14</b>
<b>Annex A (informative) Fast charging at low ambient temperature</b>	<b>15</b>
<b>Annex B (informative) Heavy duty vehicles</b>	<b>19</b>
<b>Bibliography</b>	<b>23</b>

ISO/SAE FDIS 12906

<https://standards.iteh.ai/catalog/standards/iso/e99f1c15-17da-4dc4-ad68-ffc670e34496/iso-sae-fdis-12906>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

SAE International is a global association of more than 128,000 engineers and related technical experts in the aerospace, automotive and commercial-vehicle industries. Standards from SAE International are used to advance mobility engineering throughout the world. The SAE Technical Standards Development Program is among the organization's primary provisions to those mobility industries it serves aerospace, automotive, and commercial vehicle. These works are authorized, revised, and maintained by the volunteer efforts of more than 9,000 engineers, and other qualified professionals from around the world. SAE subject matter experts act as individuals in the standards process, not as representatives of their organizations. Thus, SAE standards represent optimal technical content developed in a transparent, open, and collaborative process.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1 and the SAE Executive Standards Committee Policy. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO and SAE draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO and SAE take no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO and SAE [had/had not] received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO and SAE shall not be held responsible for identifying any or all such patent rights.

SAE Executive Standards Committee Rules provide that: "This document is published to advance the state of technical and engineering sciences. The use of this document is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was jointly prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 37, *Electrically propelled vehicles* and SAE Hybrid – EV Committee.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html). Alternatively, to provide feedback on this document, please visit <http://standards.sae.org/PRODCODE>.

## Introduction

The test procedures were derived from typical use cases. Both test procedures and use cases were established based on the following premises:

- Comparability: the charging performance determined according to this document enables a comparison of the performance of different electrically propelled vehicles in realistic scenarios. The application of specific optimizing features to improve the charging performance (e.g. battery thermal preconditioning based on navigation systems) is taken into account.
- Imitability and plausibility: the possibility to retrace the determined charging performance in principle.
- Reproducibility: the specified test conditions, test methods and test processes ensure reproducibility within common measurement tolerances. It was important to leave as little space as possible for inadvertent deviations or manipulations.

The test results serve for information purposes, e.g. for vehicle operator interfaces or manufacturer specifications.

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO/SAE FDIS 12906

<https://standards.iteh.ai/catalog/standards/iso/e99f1c15-17da-4dc4-ad68-ffc670e34496/iso-sae-fdis-12906>



# Road vehicles — Test procedures for electric vehicles to determine charging performance

## 1 Scope

This document specifies test procedures to determine the charging performance of electric vehicles. This document facilitates clear and consistent comparisons of realistic charging capabilities of electrically propelled vehicles (EVs) via commercially available electric vehicle supply equipment. It provides details about test conditions, test methods and test processes derived from typical use cases. Furthermore, it specifies requirements regarding the information for the vehicle operator.

This document is applicable to EVs, including plug-in hybrid EVs.

This document does not provide requirements for mopeds and motorcycles.

Unless specified otherwise, all test procedures can be applied to AC, DC or wireless charging methods.

NOTE Specifications for reverse power transfer are under consideration.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 3.1 applicable driving test

#### ADT

driving test provision including test procedure and requirements for homologation in the intended market

EXAMPLE Commission Regulation (EU) 2017/1151; SAE J1634.

### 3.2 ADT schedule

collection of one or more driving cycle(s)

EXAMPLE Worldwide light-duty test cycle; urban dynamometer driving schedule.

### 3.3 DC electric energy consumption

#### $EC_{DC}$

energy withdrawn per distance from the RESS (3.10) for operating the EV (3.5) as measured by the combined test procedure defined in the ADT (3.1)

Note 1 to entry: Charging losses due to AC charging are excluded.

Note 2 to entry: The unit of the distance referred to depends on the specification in the ADT.

Note 3 to entry: In the worldwide light-duty test cycle, the consumption of the combined test procedure is called  $EC_{DC,WLTC}$ .

### 3.4

#### **discharged battery energy**

##### **DBE**

energy removed from the *RESS* (3.10) during the *ADT schedule* (3.2)

Note 1 to entry: At the end of the *ADT* (3.1) the DBE equals the usable battery energy.

### 3.5

#### **electrically propelled vehicle**

##### **EV**

vehicle with one or more electric drive(s) for vehicle propulsion

[SOURCE: ISO 6469-3:2021, 3.15 — The abbreviated term “EV” has been added.]

### 3.6

#### **remaining electric range**

range calculated based on the battery capacity remaining for driving and the  $EC_{DC}$  (3.3) of the *EV* (3.5) as determined in the *ADT* (3.1)

### 3.7

#### **EV supply equipment**

##### **EVSE**

equipment or combination of equipment that provides dedicated functions to supply electric energy from a fixed electrical installation or supply network to an *electrically propelled vehicle* (3.5) for the purpose of charging

[SOURCE: IEC 61851-1:2017, 3.1.1, modified – Examples were deleted.]

### 3.8

#### **indicated state of charge**

##### **indicated SOC**

residual capacity of *rechargeable energy storage system* (3.10) available to be discharged as indicated to the vehicle operator

Note 1 to entry: Indicated state of charge is normally expressed as a percentage of full charge.

[SOURCE: ISO/TR 11954:2024, 3.11, modified — The term was originally RESS state of charge and “as indicated to the vehicle operator” has been added.]

### 3.9

#### **optimizing features**

all vehicle functions that positively impact the test results when activated either automatically or by the vehicle operator

EXAMPLE Battery thermal preconditioning functions activated by navigation systems, specific charging modes selected by the vehicle operator.

### 3.10

#### **rechargeable energy storage system**

##### **RESS**

rechargeable system that stores energy for delivery of electric energy for the electric drive

EXAMPLE Battery, capacitor.

[SOURCE: ISO 6469-1:2019, 3.22, modified — “Flywheel” has been deleted from the examples.]




### 3.11

#### recharged usable battery energy

##### rUBE

share of *UBE* (3.13) that is recharged within a certain period

Note 1 to entry: See Figure 1.

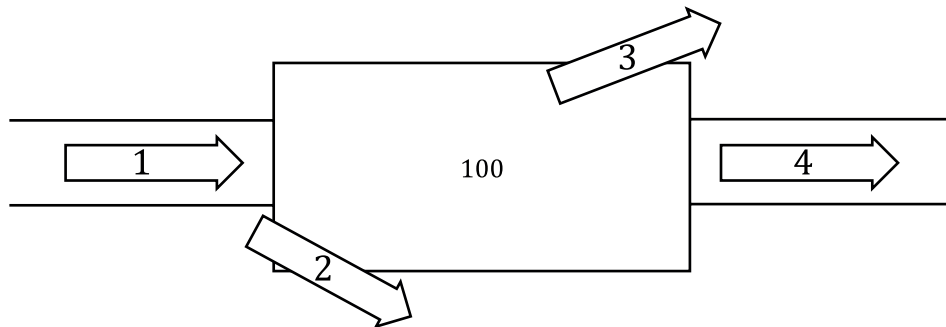

#### Key

- 1 energy added to the RESS (see MP3 in Figure 4)
- 2  $Q_{\text{loss}}$  for recharging (e.g. loss due to cell chemistry, heating in RESS)
- 3  $Q_{\text{loss}}$  for recharging (e.g. loss due to cell chemistry, heating in RESS)
- 4 rUBE (see MP4 in Figure 4)
- 100 RESS

Figure 1 — Relationship between energies and losses at the RESS

### 3.12

#### soaking

establishing a targeted steady state by exposing the *EV* (3.5) to defined environmental conditions

### 3.13

#### usable battery energy

##### UBE

usable *RESS* (3.10) energy determined according to *ADT* (3.1)

## 4 Abbreviated terms

AC	alternating current
DC	direct current
GPS	global positioning system
RMS	root mean square
WLTC	worldwide light-duty test cycle
WLTP	worldwide harmonized light vehicles test procedure

## 5 General

The test procedures specified in this document serve to determine the charging performance of an EV.

NOTE It is not necessary to perform all test procedures.

This document does not address bundling or the classification of vehicle configurations. It therefore does not specify for which changes in vehicle configurations the test procedures shall be repeated. The manufacturer may apply test results to other vehicle configurations than the vehicle configuration tested. In this case, the vehicle manufacturer shall ensure that the values stated in the vehicle operator information (see [Clause 7](#)) are also possible with the corresponding vehicle configurations.

The vehicle manufacturer may specify values in the vehicle operator information that are worse than the test results achieved, e.g. to add some margin.

The vehicle manufacturer may specify a range of values in the vehicle operator information for bundling or the classification of vehicle configurations.

NOTE The vehicle operator can be the owner or driver of the vehicle or a test engineer.

## 6 Test cases and general requirements

### 6.1 Overview of test cases

[Table 1](#) gives an overview of the test cases to determine the charging performance. Implementation details on how to perform the corresponding test procedures are given in [6.3](#).

**Table 1 — Overview of test cases**

Test case	Charging power	Start condition	End condition	Test result
Normal charging (typically AC unless unavailable on the vehicle)	charging power applied in ADT <sup>a</sup>	start and end conditions apply according to the ADT		<ul style="list-style-type: none"> <li>— charging duration</li> <li>— charging efficiency</li> <li>— max. charging power</li> <li>— recharged electric range after 60 min</li> </ul>
Fast charging	charging power up to the max. charging power supported by the EV	15 km to 60 km remaining electric range <sup>b</sup>	10 min	— recharged electric range after 10 min
		10 % indicated SOC <sup>c</sup>	80 % indicated SOC	<ul style="list-style-type: none"> <li>— charging duration</li> <li>— charging efficiency</li> <li>— max. charging power</li> </ul>

<sup>a</sup> E.g. Europe 11 kW (16 A at 230 V 3-phase), US 9,6 kW (40 A at 240 V), China 7 kW (32 A at 220 V), Japan 6 kW (30 A at 200 V).  
<sup>b</sup> See [6.3.2.5](#) for specifications related to the starting condition.  
<sup>c</sup> See [6.2.4](#) for determination of indicated SOC.

The fast charging test case is only applicable to EVs that support a maximum charging power > 22 kW.

[Annex A](#) specifies the test procedure to determine the charging performance at low ambient temperatures. [Annex B](#) provides a test procedure for heavy duty vehicles.

### 6.2 General requirements

#### 6.2.1 Vehicle manufacturer specifications

The vehicle manufacturer shall specify the required current and voltage ranges to be covered by the EVSE for each test procedure.

For AC charging, the vehicle manufacturer shall additionally specify the number of phases and the charging cable applied.

If applicable, the vehicle manufacturer shall explain how to activate optimizing features (e.g. specific charging modes, GPS navigation, activation via diagnostic function).

The vehicle manufacturer specifications should take region-specific availabilities (e.g. supply network connections) into account.

The EVSE applied in the testing shall support the specifications of the vehicle manufacturer to allow the maximum charging performance of the EV under test.

### 6.2.2 EV run-in

The EV under test shall have been run-in according to the specifications of the ADT. If the ADT does not specify run-in requirements, the EV shall have been run-in at least 300 km or one full charge distance, whichever is longer.

NOTE The EV run-in time can differ between battery electric vehicles and externally chargeable electric hybrid vehicles in the ADTs.

### 6.2.3 Measurement tolerances and accuracies

The vehicle manufacturer shall take measurement tolerances and accuracies into account in the determination of the test result. External measuring tools and/or on-board measurement data from the EV may be used in the tests.

[Table 2](#) provides sample rate, accuracy and resolution for different parameters that shall be applied in the measurements described in this document.

**Table 2 — Measurement sample rates, accuracies and resolutions**

Measured parameter	Sample rate	Accuracy	Resolution
Time [s]	-	$\pm 1$ s	$\leq 1$ s
Indicated SOC [%]	1 Hz	as provided by the EV	$\leq 1$ %
Energy [kWh] during discharge to measure the DBE (see <a href="#">6.2.5</a> )	20 Hz for the voltage and current measurements	$\pm 1$ % of reading, or 0,3 % of full scale of measurement device, whichever is greater	$\leq 1$ Wh
Energy [kWh] to identify the charging efficiency (see <a href="#">6.2.6</a> )	Watt-hour meter, Class 1 in accordance with IEC 62053-21 or equivalent		
Electrical power [kW] (see <a href="#">6.2.7</a> )	1 Hz	$\pm 1$ % of reading	$\leq 10$ W when charging power < 10 kW and $\leq 100$ W when charging power $\geq 10$ kW

The full scale of the measurement device should not exceed the maximum measured parameter to the extent that it significantly impacts the test result.

NOTE A wideband meter (power analyser) or wideband ampere-hour meter for pulsed power electronics can be used for the DBE measurement.

### 6.2.4 Determination of indicated SOC

The indicated SOC shall be obtained from the on-board measurement data from the EV or from the on-board indication.

NOTE The indicated SOC at any other interface available can be used for plausibility checks but can be subject to certain latencies.