



**International
Standard**

ISO 33405

**Reference materials — Approaches
for characterization and assessment
of homogeneity and stability**

*Matériaux de référence — Approches pour la caractérisation et
l'évaluation de l'homogénéité et la stabilité*

**First edition
2024-05**

iteh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 33405:2024](https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024)

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 33405:2024](https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024)

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	2
5 Conventions	3
6 Overview of reference material production	3
6.1 General.....	3
6.2 Summary of project design.....	3
6.3 Acquisition of starting material.....	5
6.4 Feasibility studies.....	6
6.5 Reference material processing.....	6
6.6 Homogeneity assessment.....	6
6.7 Stability assessment.....	6
6.8 Choice of measurement procedures.....	7
6.9 Metrological traceability.....	7
6.10 Characterization and uncertainty evaluation.....	7
6.11 Commutability assessment.....	7
6.12 Transport issues.....	7
6.13 Value assignment.....	8
6.14 Stability monitoring.....	8
6.15 Reference materials produced in repeated batches.....	8
7 Assessment of homogeneity	8
7.1 Preamble.....	8
7.2 Need for an experimental homogeneity study.....	9
7.3 Properties to be studied.....	10
7.4 Statistically valid sampling schemes.....	10
7.4.1 Minimum number of units for a homogeneity study.....	10
7.4.2 Use of statistical power analysis.....	12
7.4.3 Sampling strategies for a homogeneity study.....	12
7.5 Choice and conduct of the measurement procedure for a homogeneity study.....	13
7.5.1 Choice of measurement procedure.....	13
7.5.2 Conduct of measurements for homogeneity studies.....	13
7.6 Homogeneity study designs.....	15
7.6.1 Objective of a homogeneity study.....	15
7.6.2 The basic homogeneity study design – measurement in a single run.....	16
7.6.3 Randomized block design.....	17
7.6.4 Balanced nested design.....	17
7.6.5 Alternative strategies.....	17
7.7 Evaluating a homogeneity study.....	18
7.7.1 Initial inspection for measurement trends and outliers.....	18
7.7.2 Inspection for processing trends.....	19
7.7.3 Evaluation of the between-unit term – basic design.....	19
7.7.4 Evaluation of the between-unit term – randomized block design.....	20
7.7.5 Evaluation of the between-unit term – balanced nested design.....	21
7.7.6 Other homogeneity designs and alternative estimation methods.....	21
7.8 Insufficient repeatability of the measurement procedure.....	22
7.9 Within-unit homogeneity.....	22
7.9.1 Assessing the need for within-unit homogeneity study.....	22
7.9.2 Testing for significant within-unit heterogeneity.....	22
7.9.3 Assessing minimum sample size.....	24

7.10	Check for sufficient homogeneity	25
7.11	Uncertainty evaluation from homogeneity studies	26
8	Assessment and monitoring of stability	26
8.1	Preamble	26
8.2	Assessment of stability	27
8.2.1	Requirement for stability assessment	27
8.2.2	Types of (in)stability	27
8.2.3	General methods for assessment of stability	28
8.2.4	Need for experimental study of stability	28
8.3	Classification of stability studies	29
8.3.1	General	29
8.3.2	Classification according to conditions of measurement	29
8.3.3	Classification according to stability study duration and conditions	30
8.3.4	Classification by study objective	30
8.3.5	Designs for different storage and treatment conditions	31
8.4	General requirements for effective stability studies	32
8.4.1	Overview of requirements	32
8.4.2	Selection of RM units	32
8.4.3	Suitable measurement procedure(s) for stability studies	32
8.4.4	Appropriate experimental design	32
8.5	Evaluation of stability study results	33
8.5.1	General considerations for stability study data treatment	33
8.5.2	The basic stability study: multiple points in time at a single storage condition	34
8.5.3	Isochronous designs	36
8.5.4	Accelerated stability studies with multiple exposure conditions	38
8.5.5	Additional sources of random variation in stability studies	41
8.6	Action on finding a significant trend in a stability study	41
8.7	Uncertainty evaluation from stability studies	42
8.7.1	General considerations for uncertainty evaluation from stability studies	42
8.7.2	Sources of uncertainty in predicted change over time	42
8.7.3	Estimation of stability uncertainties in the absence of significant trends	43
8.7.4	Evaluation of stability uncertainties in the case of a known significant trend	43
8.8	Estimation of storage lifetime (“shelf life”) from a stability study	44
8.9	Instructions for use related to management of stability	44
8.10	Stability monitoring	44
8.10.1	Requirements for monitoring	44
8.10.2	Choice of initial monitoring point and monitoring interval(s)	45
8.10.3	Experimental approaches and evaluation for stability monitoring	46
9	Characterization of the material	47
9.1	Preamble	47
9.2	Establishing metrological traceability	48
9.2.1	Principle	48
9.2.2	Metrological references	48
9.2.3	Types of measurands	49
9.2.4	Effect of sample preparation or pre-treatment	49
9.2.5	Verification of traceability	50
9.3	Characterization using a single reference measurement procedure (as defined in ISO/IEC Guide 99) in a single laboratory	50
9.3.1	Characterization by a reference measurement procedure without direct comparison with a CRM of the same kind	50
9.3.2	Characterization by value transfer from a reference material to a closely matched candidate reference material using a single measurement procedure performed by one laboratory	51
9.3.3	Selection of RM units for single-laboratory characterization	52
9.3.4	Formulation methods	52
9.4	Characterization of a non-operationally defined measurand using two or more methods of demonstrable accuracy in one or more competent laboratories	53
9.4.1	Concept	53

ISO 33405:2024(en)

9.4.2	Study design	54
9.4.3	Evaluation	55
9.4.4	Single-laboratory multi-method studies	56
9.5	Characterization of an operationally defined measurand using a network of competent laboratories	56
9.5.1	Concept	56
9.5.2	Study setup	57
9.5.3	Evaluation	57
9.6	Purity	57
9.6.1	General	57
9.6.2	Direct determination of purity	57
9.6.3	Indirect determination of purity	58
9.7	Ordinal scales	59
9.8	Nominal properties including identity	59
9.9	Characterization of non-certified values	59
10	Evaluating measurement uncertainty	59
10.1	Basis for evaluating the uncertainty of a property value of a CRM	59
10.2	Basic model for a batch characterization	60
10.3	Uncertainty sources	61
10.4	Coverage intervals and factors	61
Annex A (informative) Design and evaluation of studies for the characterization of a method-independent measurand using two or more methods of demonstrable accuracy in one or more competent laboratories		62
Annex B (informative) Statistical approaches		73
Annex C (informative) Examples		84
Annex D (informative) Measurement uncertainty evaluation		94
Bibliography		95

Document Preview

[ISO 33405:2024](https://standards.iteh.ai/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024)

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity, or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 334, *Reference materials*.

This first edition cancels and replaces ISO Guide 35:2017, which has been technically revised.

The main changes are as follows:

- technical requirements for the characterization and the assessment of homogeneity and stability of reference materials as stipulated in ISO 17034 is reiterated in this document with additional guidance on approaches that can be used.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The production of reference materials (RMs) is a key activity for the improvement and maintenance of a worldwide coherent measurement system. As detailed in ISO 33403, RMs with different characteristics are used in measurements, such as calibration, quality control, proficiency testing and method validation, as well as for the assignment of values to other materials. Certified reference materials (CRMs) are also used to confirm or establish metrological traceability to conventional scales, such as the octane number, hardness scales and pH.

To be comparable across borders and over time, measurements need to be traceable to appropriate and stated references. CRMs play a key role in implementing the concept of traceability of measurement results in chemistry, biology and physics among other sciences dealing with substances and materials. Laboratories use these CRMs as readily accessible measurement standards to establish traceability of their measurement results to International Standards. The property values carried by a CRM can be made traceable to the International System of Units (SI) or other internationally agreed references during production. This document explains how approaches can be developed that will lead to well established property values, which are made traceable to appropriate stated references.

For RM producers, this document refers to ISO 17034, ISO 33401 and ISO Guide 30 that support the production and certification of RMs:

- ISO 17034 outlines the general requirements to be met by an RM producer to demonstrate competence;
- ISO 33401 describes the contents of certificates for CRMs and of accompanying documents for other RMs;
- ISO Guide 30 contains terms and definitions related to reference materials.

Alongside developments in RM production approaches, the range of classes of RMs is growing with advances in technology, increasing the need for more widely applicable technical guidance in RM production. In addition, increasing use of ISO/IEC 17025 and ISO 15189 by laboratories has led to greater demand for clear statements of metrological traceability.

This document describes examples of possible designs for homogeneity, stability and characterization studies that are in line with ISO 17034. It also contains specific provisions concerning the establishment of metrological traceability in RM production. [ISO 33405:2024](#)

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

Reference materials — Approaches for characterization and assessment of homogeneity and stability

1 Scope

This document explains concepts and provides approaches to the following aspects of the production of reference materials (RMs):

- the assessment of homogeneity;
- the assessment of stability and the management of the risks associated with possible stability issues related to the properties of interest;
- the characterization and value assignment of properties of an RM;
- the evaluation of uncertainty for certified values;
- the establishment of the metrological traceability of certified values.

The guidance given supports the implementation of ISO 17034. Other approaches can also be used as long as the requirements of ISO 17034 are fulfilled.

Brief guidance on the need for commutability assessment (6.11) is given in this document, but no technical details are provided. A brief introduction for the characterization of qualitative properties (9.6 to 9.8) is provided, together with brief guidance on sampling such materials for homogeneity tests (7.4.1.2). However, statistical methods for the assessment of the homogeneity and stability of RMs for qualitative properties are not covered. This document is also not applicable to multivariate quantities, such as spectral data.

NOTE ISO 33406 gives more information on the production of RMs with one or more qualitative property values.

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3534-2, *Statistics — Vocabulary and symbols — Part 2: Applied statistics*

ISO 3534-3, *Statistics — Vocabulary and symbols — Part 3: Design of experiments*

ISO Guide 30, *Reference materials — Selected terms and definitions*

ISO/IEC Guide 99, *International vocabulary of metrology — Basic and general concepts and associated terms (VIM)*

ISO 17034, *General requirements for the competence of reference material producers*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 3534-2, ISO 3534-3, ISO Guide 30, ISO/IEC Guide 99 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

classical stability study

experimental study of reference material stability in which individual samples are prepared at the same time and are measured as time elapses

3.2

isochronous stability study

experimental study of reference material stability in which units exposed to different storage conditions and times are measured in a short period of time

Note 1 to entry: [Figure 6](#) is an illustration of an isochronous stability study.

4 Symbols

a	number of RM units in a homogeneity study
d	measurement bias
k	coverage factor or (as subscript) index
L_d	a limit of detection (minimum detectable value of the net state variable) calculated using the methods of ISO 11843-1
N_{\min}	minimum number of RM units for a homogeneity study for batch sizes over 100 units
N_{prod}	number of RM units produced in a single batch
n_r	number of runs in a blocked or nested homogeneity study design
p	number of laboratory means in an interlaboratory certification exercise
s_{bu}	between-unit component of variance from a homogeneity study, expressed as a standard deviation
s_r	repeatability standard deviation
s_R	within laboratory reproducibility standard deviation
t_{Its}	duration of a long-term stability study
U_{CRM}	expanded uncertainty associated with a property value of the certified reference material (CRM)
u_{bu}	standard uncertainty associated with between-unit variability
u_{char}	standard uncertainty associated with a value assigned in a characterization study
u_{CRM}	standard uncertainty associated with the property value of the CRM
u_{trg}	target measurement uncertainty, expressed as standard uncertainty, for the value of a property to be certified
u_{hom}	standard uncertainty associated with heterogeneity
u_{Its}	standard uncertainty associated with long-term stability
u_{mon}	standard uncertainty associated with a value obtained by measuring an RM at a monitoring point

u_{trn}	standard uncertainty associated with the transport stability of the material
u_{wu}	standard uncertainty associated with within-unit heterogeneity
x_{CRM}	property value of a CRM
\hat{x}	estimated value obtained from a robust statistical estimator
x_{mon}	value obtained by measuring an RM property value at a monitoring point
x	measurement result for a property value
y_{char}	value assigned to a RM in a characterization study
M_{between}	between-group mean square term from analysis of variance (ANOVA)
M_{within}	within-group mean square term from analysis of variance (ANOVA)

5 Conventions

In this document, the following conventions are used:

- A measurand is specified in such a way that there exists a unique 'true value'.
- All probability assessments described in this document assume normality unless otherwise stated.
- Throughout this document, the law of propagation of uncertainty is used for the combination of measurement uncertainty contributions. Other methods of evaluating measurement uncertainty can also be applied and, in some cases, it is necessary to do so. Further guidance on these matters is given in ISO/IEC Guide 98-3 and its supplements.

NOTE 1 Variation between units associated with heterogeneity and changes due to instability will possibly not be normally distributed and can result in asymmetric distributions.

NOTE 2 ISO/IEC Guide 98-3 will hereafter be referred to as the "GUM".

6 Overview of reference material production

6.1 General

The production and distribution of an RM require careful planning prior to undertaking any actual activity in the project. [Subclauses 6.2 to 6.15](#) provide a brief overview of the steps involved in the production of an RM followed by a description of the main issues involved in planning each step. Detailed guidance on homogeneity assessment, stability assessment and characterization are given in [Clauses 7, 8 and 9](#), respectively.

6.2 Summary of project design

The production of an RM involves the following steps:

- specification of the RM, i.e., the matrix, the properties to be characterized and their desired levels, the intended use of the material and, for CRMs, the target uncertainty^[21];
- design of a procedure for the sourcing of the material;
- design of an RM manufacturing and/or preparation procedure;
- packaging and labelling

ISO 33405:2024(en)


- e) selection of measurement procedures appropriate for characterization, homogeneity and stability studies;
- f) consideration of metrological traceability for each measured property, particularly for CRMs, for which a statement of metrological traceability is required;
- g) assessment of homogeneity;
- h) assessment of stability;
- i) assessment of commutability (if required);
- j) characterization of the RM;
- k) combination of the results from homogeneity studies, stability studies and, for CRMs, evaluation of the measurement uncertainties of certified values;
- l) preparation of a certificate or product information sheet and, if appropriate, a report on the production and/or certification as per the guidance provided in ISO 33401;
- m) specification of storage and transportation conditions and the planned lifespan;
- n) post-production monitoring of stability.

The main stages of the project design as listed in [6.2](#) are shown schematically in [Figure 1](#). Some aspects of the project design are described in more detail in [6.3](#) to [6.15](#).

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO 33405:2024](#)

<https://standards.iteh.ai/catalog/standards/iso/e1a1290c-f011-4d91-910e-1489a062e31a/iso-33405-2024>

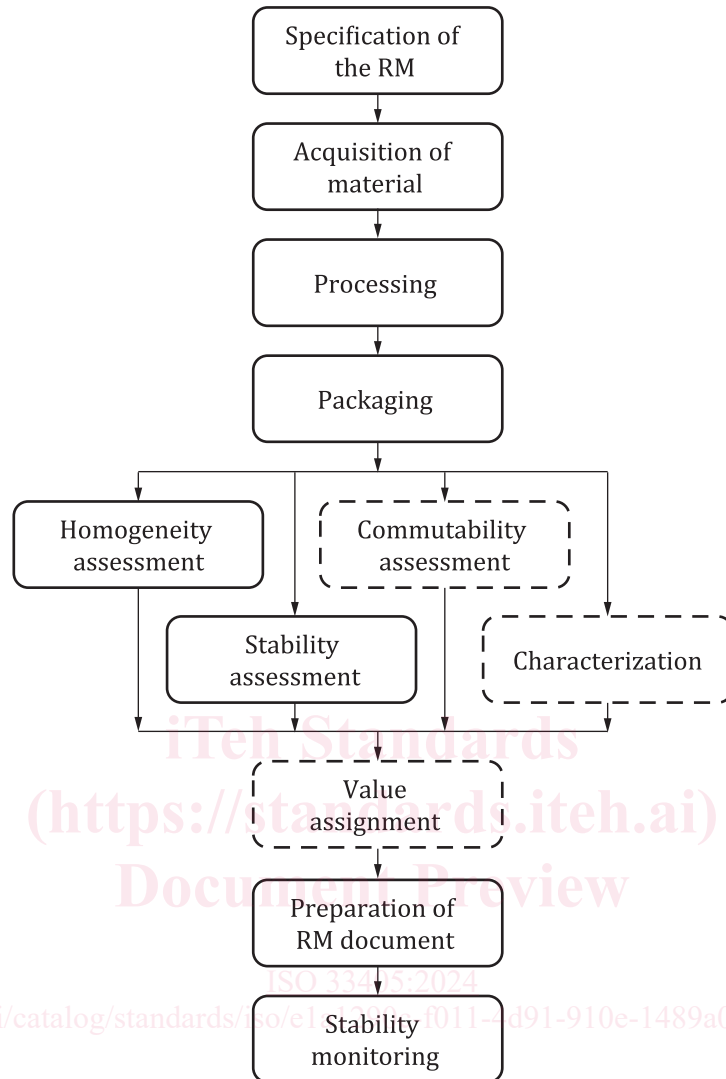

NOTE 1 The figure provides a schematic outline of the main steps in producing and maintaining an RM. Boxes with dashed outlines are not always necessary.

NOTE 2 'Packaging' in this figure includes subdivision into individual units in suitable containers for distribution.

Figure 1 — Schematic outline of a reference material project

6.3 Acquisition of starting material

The first task in an RM production project, after the specification of the RM, is the acquisition of a sufficient amount of starting material(s) with the desired properties. The amount of material needed is determined by the following:

- the number of units of the RM needed for distribution over the expected life of the RM;
- the number of units needed for the homogeneity study;
- the number of units needed for the stability study;
- the number of units needed for the characterization of the candidate RM;

- the number of units required for monitoring stability over the expected lifetime of the material;
- the planned size of each RM unit, which has to be sufficient for at least one measurement;
- the need for one or more feasibility studies;
- optionally, additional units to cover contingencies such as, for example, follow-up studies to respond to customer queries, future recertification required by a significant change in the storage conditions or extension of the number of certified properties.

The number of units of an RM that are needed for distribution is often, at least in part, a commercial issue and should be carefully considered before commissioning the collection and processing of the material. In addition, the expected long-term stability of the material in storage can influence the amount of material that can usefully be produced. It is advisable to limit the number of units produced for less stable materials to avoid wastage due to unavoidable degradation over time.

6.4 Feasibility studies

Feasibility studies are short studies intended to address concerns about the feasibility of producing and characterizing a sufficiently homogeneous and stable RM. For example, questions such as the best way of preparing the RM or ensuring sufficient stability of the material can be answered by small-scale feasibility studies early in the project^[22].

Where characterization is expected to be performed with an interlaboratory study, a feasibility study can identify possible sources of error and enable participants involved in the characterization to optimize their equipment and procedures.

NOTE In a feasibility study intended to test or improve the capabilities of participants in an interlaboratory characterization exercise (see [Clause 9](#)), use of a material different from the candidate RM can avoid undue bias in participant results arising from prior knowledge of the candidate RM.

6.5 Reference material processing

Processing can involve a range of processes, including, for example:

- synthesis, manufacture or formulation of a synthetic RM;
- drying, lyophilisation, milling, and/or filtration for natural materials;
- addition of stabilizing agents;
- homogenization prior to packaging.

The procedures used depend on the particular material and usually require expert guidance.

6.6 Homogeneity assessment

Homogeneity is an important requirement for all RMs and includes both within- and between-unit homogeneity. Between-unit homogeneity is important to ensure that each RM unit carries the same value for each property; within-unit homogeneity is important where subsamples can be taken for measurement by users of the material. [Clause 7](#) gives detailed guidance on homogeneity assessment.

6.7 Stability assessment

In accordance with ISO 17034, RMs shall be sufficiently stable for their intended use, so that the end user can rely on the assigned value at any point within the period of validity of the certificate. Typically, it is important to consider stability under long-term storage conditions, under transport conditions and, where applicable, the storage conditions at the RM user's laboratory. This can include consideration of stability after opening if repeated use of the RM is permitted. [Clause 8](#) provides detailed guidance on stability assessment.