

ISO/FDIS 20054:####(X:2022(E)

ISO TC 123/SC 7

Date: YYYY-MM-DD

Plain bearings — Bearings containing dispersed solid lubricants

iTeh STANDARD PREVIEW

FDIS stage
(standards.iteh.ai)

ISO 20054

Warning for WDs and CDs

This document is not an ISO International Standard. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an International Standard.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

A model manuscript of a draft International Standard (known as "The Rice Model") is available at

© ISO 20XX

Paliers lisses — Paliers contenant des lubrifiants solides dispersés

Second edition

Date: 2022-03-01

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 20054

<https://standards.iteh.ai/catalog/standards/sist/3614cd66-cff0-48e7-abad-be12e192c5d4/iso-20054>

ISO/FDIS 20054:2022(E)

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office

CP 401 • Ch. de Blandonnet 8

CH-1214 Vernier, Geneva

Phone: +41 22 749 01 11

Email: copyright@iso.org

Website: www.iso.org

Published in Switzerland

ITeH STANDARD PREVIEW
(standards.iteh.ai)

ISO 20054

<https://standards.iteh.ai/catalog/standards/sist/3614cd66-cff0-48e7-abad-be12e192c5d4/iso-20054>

Contents

Foreword.....iv

1 Scope..... 1

2 Normative references 1

3 Terms and definitions..... 1

4 Symbols and units 1

5 Characteristics..... 1

5.1 Structure 1

5.2 Lubricating mechanism 2

5.3 Applicable field 3

6 Material 3

6.1 Metal matrix 3

6.2 Solid lubricant 4

6.3 Combination of metal matrix and solid lubricant..... 5

7 Dimension..... 5

7.1 General..... 5

7.2 General dimension..... 6

7.2.1 Seamless bush..... 6

7.2.2 Wrapped bush 7

7.3 Tolerance classes and limit deviations 7

7.3.1 General..... 7

7.3.2 Bearing fit 7

7.3.3 Bearing clearance 7

8 Assembling 8

9 Surface finish 8

Annex A (informative) Guidance for selection of a bearing metal matrix for bearings containing dispersed solid lubricants 9

Annex B (informative) Actual applications of a bearing containing dispersed solid lubricants 10

Bibliography 11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 7, *Special types of plain bearings*.

This second edition cancels and replaces the first edition (ISO 20054:2016), of which it constitutes a minor revision.

The main changes are as follows:

— the titles of 5.2, 7.3.2 and 7.3.3 were changed to more suitable ones. In addition, changes in the description in 7.1 due to those changes were conducted.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Plain bearings — Bearings containing dispersed solid lubricants

1 Scope

This document specifies the characteristics, materials, dimensions, assembly and surface finish for a bearing containing dispersed solid lubricants which is used as a solid lubricant bearing.

NOTE In the solid lubricant bearing among self-lubricating bearings there is a solid type, a coated type, an embedded type and a dispersed type, which is specified by this document.

2 Normative references

~~The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.~~

~~ISO 3547-1, Plain bearings — Wrapped bushes — Part 1: Dimensions~~

~~There are no normative references in this document.~~

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

4 Symbols and units

See Table 1.

Table 1 — Symbols and units

Symbol	Description	Unit
B	Width of the bush	mm
D_i	Inside diameter of the bush	mm
D_o	Outside diameter of the bush	mm
x	Surface roughness	—

5 Characteristics

5.1 Structure

A bearing containing dispersed solid lubricants is made of sintered composite materials that contain solid lubricants dispersed uniformly in the metal matrix and is manufactured by powder metallurgy (see Figure 1).

This document includes multi-layered bearings with the sintered layer on a steel backing and both seamless and wrapped bushes (see Figure 2).

Figure 3 shows a typical microstructure of the bearings containing dispersed solid lubricants. The dispersed solid lubricants in the metal matrix vary in grain size and volume.




**a) Seamless bush
(fine solid lubricants type)**



**b) Seamless bush
(coarse solid lubricants type)**




a) Seamless bush — Fine solid lubricants type



b) Seamless bush — Coarse solid lubricants type


Figure 1 — Overview of bearings containing dispersed solid lubricants (that are single-layered)



a) Seamless bush



b) Wrapped bush



1 2

a) Seamless bush




1 2

b) Wrapped bush

Key


- 1 sintered layer
- 2 steel backing

Figure 2 — Overview of bearings containing dispersed solid lubricants (that are multi-layered)




1 2

a) Fine solid lubricants type




1 2

b) Coarse solid lubricants type



1 2

a) Fine solid lubricants type



1 2

b) Coarse solid lubricants type

Key

- 1 metal matrix
- 2 dispersed solid lubricant

Figure 3 — Microstructure of a bearing containing dispersed solid lubricants


5.2 Lubricating mechanism

A bearing containing dispersed solid lubricants obtains its sliding performance from the self-lubricating effects of solid lubricants and the mechanical strength of metal matrix.

The sliding performance and mechanical strength vary according to the volume of solid lubricants. Higher sliding performance requires more solid lubricants, while higher mechanical strength requires less solid lubricants.

Since solid lubricants are dispersed over the entire material, the bearings are particularly suitable for extra low speed or micro-motion applications, minimising static friction to achieve smooth sliding at the start of motion.

The solid lubricants are drawn out over both surfaces from the bearing material when it slides against the mating surface, forming a solid lubricant film. As the solid lubricant film is consumed, it is replenished from the bearing material to maintain a continuous film throughout the life of the product (see Figure 4).

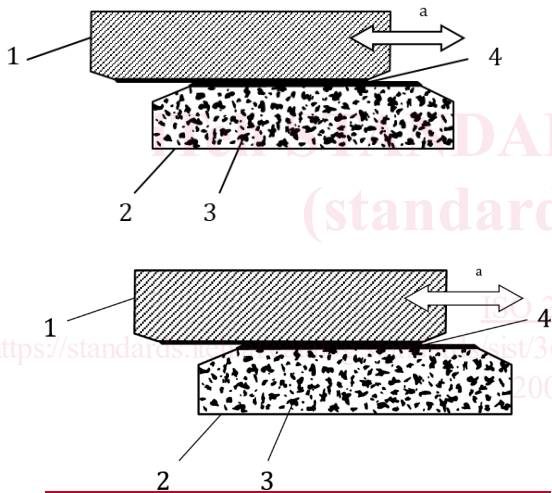

Key

- 1 mating member
- 2 metal matrix
- 3 dispersed solid lubricant
- 4 solid lubricant film
- a Sliding direction.

Figure 4 — Lubricating mechanism of a bearing containing dispersed solid lubricants

5.3 Applicable field

The bearing can be used for rotational motion, reciprocating motion, oscillating motion and frequent start/stop cycles. The bearing is also used in such applications where no fluid lubrication can be expected because of high load and low speed operation. Bearings with appropriate materials are suited to applications with high or low temperature, liquids, gases and in vacuo.

STANDARD PREVIEW
(standards.iteh.ai)

ISO 20054
https://standards.iteh.ai/catalog/standards/sist/3614cd66-cff0-48e7-abad-be12e192c5d4/iso-20054

- Inserted Cells
- Inserted Cells
- Inserted Cells
- Inserted Cells

The bearing has been developed to operate satisfactorily without oil or grease lubricants. However, if the application permits, oil or grease may be utilized to improve bearing durability, prevent dust from entering the bearing, flush out wear debris or prevent corrosion of the bearing components.

6 Material

6.1 Metal matrix

The constituent elements of the metal matrix in the bearing define the physical, chemical and mechanical properties of the bearing. The chemical composition and manufacturing methods (sintering and heat treatment) influence the bearing metal matrix properties.

Metal matrix base materials are principally copper, nickel or iron. Table 2 shows the operating temperature for the alloy types.

Table 2 — Types of alloy and their operating temperature

Alloy type	Operating temperature ^a temperature ^a °C
Copper based alloys	-200 to 450
Nickel based alloys	-200 to 600
Iron based alloys	0 to 700

^a Operating temperature varies according to the composition.

The most commonly-used, copper-based metal matrix group is Cu-Sn, but Cu-Ni-Sn and Cu-Ni-Fe alloys offer enhanced thermal resistance and strength.

The nickel-based metal matrix group includes Ni-Cu-Fe alloys, which offer high corrosion resistance.

The iron-based metal matrix group includes Fe-Cu alloys, which offer higher thermal resistance than copper-based alloys by the formation of iron oxide lubricant films. In addition, there are high-heat resistant Fe-Ni-Cu alloys and stainless alloys (Fe-Cr-Ni alloys, etc.).

Metal matrix may contain small additive additions to enhance performance. The surface of metal matrix may have an additional running-in coating.

A guide for the selection of a bearing metal matrix for bearings containing dispersed solid lubricants is shown in Figure A.1 of Annex A.

6.2 Solid lubricant

Many types of solid lubricants are available. They are selected to suit the operating conditions because their friction performances are influenced by the operating environment. The majority of bearings incorporate graphite and molybdenum disulphide as solid lubricants. Other solid lubricants with low friction, suited to demanding environments, include tungsten disulphide, boron nitride and polytetrafluoroethylene (PTFE). Table 3 shows an outline for the operating temperatures and the atmosphere for the solid lubricants.

The size and type of solid lubricants are selected based on the operating conditions.

Table 3 — Types of solid lubricants and their properties

Type	Operating temperature	Atmosphere
------	-----------------------	------------