

2023-08-09

ISO/FDIS 182-3:2023(E)

ISO/TC 61/SC 9/AVG 29

Secretariat: SAC KATS

Date: 2023-08-31

Style Definition

Formatted: Font: 14 pt, French (Switzerland)

Formatted

Formatted: zzCover large

Formatted

Formatted: Space After: 0 pt, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Plastics — Determination of the tendency of compounds and products based on vinyl chloride homopolymers and copolymers to evolve hydrogen chloride and any other acidic products at elevated temperatures — Part 3: Conductometric method

Formatted: Cover Title_A1, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Part 3: Conductometric method

Plastiques — Détermination de la tendance des compositions et produits à base d'homopolymères et de copolymères du chlorure de vinyle à dégager du chlorure d'hydrogène et éventuellement d'autres produits acides à températures élevées — Partie 3: Méthode conductométrique

Formatted: Cover Title_B, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Partie 3: Méthode conductométrique

Formatted: Font: Not Italic, English (United Kingdom)

Edited DIS - MUST BE USED FOR FINAL DRAFT

ISO #####-#:####(X)

FDIS stage

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 182-3

<https://standards.iteh.ai/catalog/standards/sist/210cc5e1-6366-4b82-bb83-88ba66fc64e5/iso-fdis-182-3>

© ISO, 2022, 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: + 41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt, Bold

Formatted: Left: 1.9 cm, Right: 1.9 cm, Bottom: 1 cm, Gutter: 0 cm, Header distance from edge: 1.27 cm, Footer distance from edge: 0.5 cm

Formatted: French (Switzerland)

Formatted: No page break before, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Default Paragraph Font, French (Switzerland)

Formatted: French (Switzerland)

Formatted: French (Switzerland)

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: French (Switzerland)

Formatted: French (Switzerland)

Formatted: French (Switzerland)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 182-3

<https://standards.iteh.ai/catalog/standards/sist/210cc5e1-6366-4b82-bb83-88ba66fc64e5/iso-fdis-182-3>

~~Edited DIS -~~
~~MUST BE USED~~
~~FOR FINAL~~
~~DRAFT~~

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Contents

Foreword	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Principle	2
5 Reagents	2
6 Apparatus	2
7 Preparation of test samples	11
7.1 General	11
7.2 PVC plastisols	11
7.3 PVC pellets, extrudates, mouldings, thick sheet, etc.	11
7.4 PVC film and sheet	11
7.5 PVC coatings	12
7.6 Cable and conductor insulation or sheathing	12
8 Number of tests	12
9 Temperatures for dehydrochlorination	12
10 Test procedure	12
10.1 Preparation of test portion	12
10.2 Preliminary operations	12
10.3 Special precautions when using dehydrochlorination cell A	12
10.4 Preparation of the measurement cell	13
10.5 Decomposition of the test portion	13
11 Expression of results	13
12 Test report	13
13 Precision	14
13.1 General	14
13.2 Repeatability	14
13.3 Reproducibility	14
13.4 Comparison with the pH-meter method (ISO 182-2)	14
13.5 Factors affecting the stability time	15
13.6 Conclusions	17
Annex A (informative) Cleaning of the apparatus	18
Annex B (informative) Calculation of repeatability and reproducibility — Conductometric and pH-meter methods	19
Annex C (informative) Interlaboratory test	21
Bibliography	23

Foreword — v

Formatted: Font: 11 pt, Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt, Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

1 — Scope — 1

2 — Normative references — 1

3 — Terms and definitions — 2

4 — Principle — 2

5 — Reagents — 2

6 — Apparatus — 2

7 — Preparation of test samples — 7

7.1 — PVC plastisols — 7

7.2 — PVC pellets, extrudates, mouldings, thick sheet, etc. — 7

7.3 — PVC film and sheet — 7

7.4 — PVC coatings — 7

7.5 — Cable and conductor insulation or sheathing — 7

8 — Number of tests — 7

9 — Temperatures for dehydrochlorination — 8

10 — Test procedure — 8

10.1 — Preparation of test portion — 8

10.2 — Preliminary operations — 8

10.3 — Special precautions when using dehydrochlorination cell A — 8

10.4 — Preparation of the measurement cell — 9

10.5 — Decomposition of the test portion — 9

11 — Expression of results — 9

12 — Test report — 9

13 — Precision — 10

13.1. Introduction — 10

13.2. Repeatability — 10

13.3. Reproducibility — 10

13.4. Comparison with the pH meter method (ISO 182-2) — 11

13.5. Factors affecting the stability time — 11

13.6. Conclusions — 13

Annex A (informative) Cleaning of the apparatus — 1

A.1 — Dehydrochlorination cell A — 1

A.2 — Sintered glass discs — 1

A.3 — Glass connecting tube — 1

A.4 — Measurement cell — 1

Annex B (informative) Calculation of repeatability and reproducibility — Conductometric and pH meter methods — 2

B.1 — Calculation of r and R for unplasticized PVC — Conductometric method — 2

B.2 — Calculation of r and R for unplasticized PVC — pH meter method — 3

Annex C (informative) Round robin test — 4

C.2 Test conditions — 4

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 182-3

<https://standards.iteh.ai/catalog/standards/sist/210cc5e1-6366-4b82-bb83-88ba66fc64e5/iso-fdis-182-3>

Edited DIS -
MUST BE USED
FOR FINAL
DRAFT

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt, Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt, Bold

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 182-3

<https://standards.iteh.ai/catalog/standards/sist/210cc5e1-6366-4b82-bb83-88ba66fc64e5/iso-fdis-182-3>

~~Edited DIS -
MUST BE USED
FOR FINAL
DRAFT~~

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: 11 pt, Bold

Formatted: Font: 11 pt, Bold

Formatted: Left, Space After: 0 pt, Line spacing: single

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part-1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part-2 (see www.iso.org/directives).

Formatted: English (United Kingdom)

Field Code Changed

~~Attention is drawn to the possibility that some of the elements of this document may be involved in patent rights. ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).~~

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 9, *Thermoplastic materials*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 249, *Plastics*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 182-3:1993), which has been technically revised.

The main changes are as follows:

- adding the use of alternative heating baths such as metal blocks.

A list of all parts in the ISO 182 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Formatted: Font: 11 pt

**Edited DIS
MUST BE USED
FOR FINAL
DRAFT**

Plastics — Determination of the tendency of compounds and products based on vinyl chloride homopolymers and copolymers to evolve hydrogen chloride and any other acidic products at elevated temperatures — Part 3: Conductometric method

Part 3: Conductometric method

WARNING — The use of this document **may** involve hazardous materials, operations and equipment. This document does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this document to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

1 Scope

1.1 This document specifies a method for the determination of the thermal stability at elevated temperature of compounds and products based on vinyl chloride homopolymers and copolymers (in the following text abbreviated as PVC) which undergo dehydrochlorination (the evolution of hydrogen chloride).

1.2 This document is applicable to the characterization of PVC compounds and products, especially with regard to the effectiveness of their heat-stabilizing systems.

It is applicable to coloured PVC compounds and products where a discolouration test under the action of heat may be unsatisfactory.

1.3 This document is applicable to compounded PVC materials and products. It can be applicable to polymers in powder form under appropriate conditions, to be agreed upon between the interested parties.

This document does not apply to PVC compounds in the form of dry blends, since such materials can be not sufficiently homogeneous.

1.4 This document does not apply to PVC compounds and products which evolve other decomposition products, in addition to hydrogen chloride, at elevated temperatures that can affect the conductivity of water when they are absorbed into it. In this case, a method suitable for the determination of chloride ion (Cl⁻) in the absorbing solution shall be used (see ISO 182-4^[2]-4^[2]).

1.5 This document can also be applied to other plastics materials which can evolve hydrogen chloride or other hydrogen halides when heated under the conditions prescribed by the relevant specifications, or as agreed upon between the interested parties.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 565, Test sieves — Metal wire cloth, perforated metal plate and electroformed sheet — Nominal sizes of openings

ISO 4793, Laboratory sintered (fritted) filters — Porosity grading, classification and designation

Formatted: Font: Bold

Formatted: Main Title 1, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Font: Bold

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Font: Bold

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.99 cm

Formatted: Font: Bold

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.76 cm + 2.51 cm

Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Default Paragraph Font

Formatted

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Default Paragraph Font

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: Not Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

ISO 6353-2, Reagents for chemical analysis — Part 2: Specifications — First series

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain ~~terminological~~terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>~~https://www.iso.org/obp~~
- IEC Electropedia: available at <https://www.electropedia.org/>~~https://www.electropedia.org/~~

3.1 stability time

t_s
time, measured by reference to a predetermined change in the conductivity of absorbing demineralized water, required for a certain amount of hydrogen chloride to be evolved when a prescribed mass of PVC compound or product is maintained at an elevated temperature under the test conditions specified in this document

4 Principle

A test portion of the PVC compound or product is maintained at an agreed temperature in a nitrogen gas stream and the hydrogen chloride evolved is absorbed in a given amount of demineralized water. The amount of hydrogen chloride evolved is determined in relation to the recorded change in conductivity of the water.

5 Reagents

During the test, use only reagents of recognized analytical grade in accordance with ISO 6353-2.

5.1 Pure nitrogen, containing less than 6 ppm oxygen and less than 0,1 ppm carbon dioxide by volume. The purity shall be such that when the gas is passed through demineralized water (see ~~5.2~~5.2) for 1 h at a rate of $(7,2 \pm 0,1)$ l/h, the conductivity of the water remains unchanged.

The gas shall be dried by passing it through a suitable drying agent, and the flow-rate through the dehydrochlorination cell adjusted by means of a needle valve and measured using a suitable flowmeter.

5.2 Demineralized water, with a conductivity not higher than $5 \mu\text{S}/\text{cm}$.

6 Apparatus

The general arrangement of the apparatus is shown in ~~Figure 1~~Figure 1.

6.1 Dehydrochlorination cells.

6.1.1 Glass Cell A (re-usable), with shape and dimensions as shown in ~~Figure 2~~Figure 2.

A recommended procedure for cleaning the cell is given in ~~Annex A~~Annex A.

6.1.2 Glass Cell B (disposable), with shape and dimensions as shown in ~~Figure 3~~Figure 3.

NOTE Other types of cell can be employed if it has been proved that the results obtained are equivalent to those obtained with one of the cells described in ~~6.1.1 and 6.1.2~~6.1.1 and 6.1.2.

6.2 Test portion holder, for use with cell A. The test portion is supported on a porous sintered-glass disc grade P 100 specified in ISO 4793, 10 mm in diameter.

Formatted: Font: Not Bold


Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single

To prevent blocking of the porous disc, it is advisable to place a thin, soft layer of glass wool between it and the test portion.

A recommended procedure for cleaning the disc support is given in Annex A.

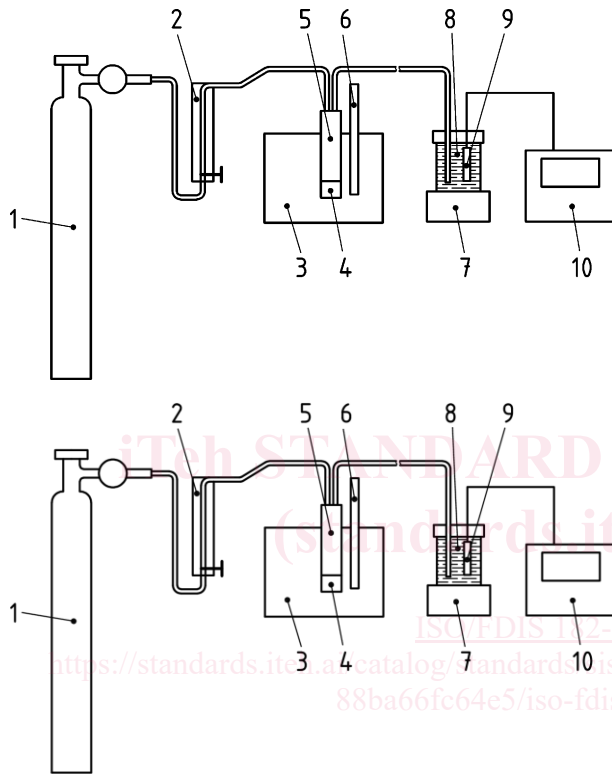

Key	
1	N ₂ cylinder with pure nitrogen
2	flowmeter
3	heating bath/heating block including temperature controller (resolution 0,1 °C)
4	PVC test portion
5	dehydrochlorination cell (details see Figure 2 and 3)
6	thermometer (resolution 0,1 °C)
7	magnetic stirrer (in case using heating oil bath)
8	absorbing solution
9	measuring electrode(s)
10	conductance meter

Figure 1 — General arrangement of apparatus

Formatted: Font: Bold

Formatted: Font: 9 pt

Formatted Table

Formatted: Font: 9 pt

Formatted: Don't keep with next, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Font: 9 pt

Formatted: Don't keep with next, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Font: 9 pt

Formatted: Font: 9 pt

Formatted: Don't keep with next, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Default Paragraph Font, Font: 9 pt

Formatted: Font: 9 pt

Formatted: Don't keep with next, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.7 cm + 1.4 cm + 2.1 cm + 2.8 cm + 3.5 cm + 4.2 cm + 4.9 cm + 5.6 cm + 6.3 cm + 7 cm

Formatted: Font: 9 pt

Formatted: None, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Font: Not Bold

Formatted: Space After: 0 pt, Line spacing: single

Formatted: Font: 11 pt

Dimensions in millimetres

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/FDIS 182-3

<https://standards.iteh.ai/catalog/standards/sist/210cc5e1-6366-4b82-bb83-88ba66fc64e5/iso-fdis-182-3>

Formatted: Font: Not Bold

Formatted: Font: 11 pt

Formatted: Font: 11 pt

Formatted: Space After: 0 pt, Line spacing: single