



Designation: F1989 – 05 (Reapproved 2013)

## Standard Specification for Cooking Fire Suppression Blankets<sup>1</sup>

This standard is issued under the fixed designation F1989; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This specification covers requirements for cooking fire suppression blankets to extinguish accidental cooking fires.

1.2 This specification does not apply to cooking fire suppression blankets that: are made from asbestos; have sides of differing appearance, finish or color; have a performance that differs according to which side is used; or, are of metallic construction or component.

1.3 The values stated in SI units are to be regarded as the standard.

1.4 The following safety hazards caveat pertains only to the test methods portion of this specification, Section 4: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Terminology

2.1 *Definitions*—For the purpose of this specification, the following definition applies:

2.1.1 *fire blanket, n*—flexible sheet(s) of material intended to be used to extinguish small fires by smothering.

### 3. Physical Properties

3.1 *Size and Shape*—Cooking fire suppression blankets shall be rectangular or square, with no edge less than  $0.91 \pm 0.05$  m ( $36 \pm 2$  in.).

3.2 *Mass*—Cooking fire suppression blankets shall have a mass not exceeding 2 kg (4.4 lb).

#### 3.3 *Hand Holding Devices:*

3.3.1 Hand holding devices, if provided, shall consist of sewn in straps on both sides of the blanket to facilitate quick release. The strap length shall not be less than 100 mm (3.9 in.) or more than 200 mm (7.8 in.) in length, and easily grasped and

released when applying the blanket over a cooking fire. The straps may be made of any high strength material and shall be of contrasting color from the blanket itself.

3.3.2 Attention shall be paid to the design of any holding device to ensure ease of handling and hand release.

3.4 *Appearance and Bi-Lateral Use*—The two sides of a fire blanket shall be of identical appearance, finish or color and shall give the equivalent results when tested for compliance with Section 4.

NOTE 1—It is important not only that either side of fire blanket can be exposed to the fire or other hazard with equal effectiveness, but also that no doubt be created in the mind of the user at the moment of emergency use as to which side of the fire blanket to apply to the hazard.

3.5 *Resistance to Fraying or Tearing*—The edges of cooking fire suppression blankets shall not fray or tear during testing for compliance with 4.3.1, 4.3.2, 4.4.4, and 4.5.1.5.

### 4. Test Methods

#### 4.1 *Sampling and Sequence of Testing:*

4.1.1 A minimum of nine cooking fire suppression blankets is required. Identify and mark the cooking fire suppression blankets as No. 1 to 9 and the two sides as (a) and (b).

4.1.1.1 Cooking fire suppression blankets which contain a seam shall be tested both on and off the seam and, where the seam is tested, in the most unfavorable condition. Tests shall be carried out using a single thickness of cooking fire suppression blankets.

4.1.2 Use any fire blanket as required for the nondestructive examinations required in Section 4. Use cooking fire suppression blankets No. 1, 2, and 3 for testing to 4.5.1 in the sequence of 1(a), 2(b), 3(a). Use cooking fire suppression blankets 4, 5 and 6 for testing to 4.4 in sequence of 4(a), 5(b), and 6(a). Use cooking fire suppression blankets 7, 8 and 9 for testing to 4.5.2 in sequence of 7(a), 8(b), and 9(a).

#### 4.2 *Conditioning:*

4.2.1 Condition cooking fire suppression blankets for testing for 48 h so that they are in equilibrium with air at  $20 \pm 5^\circ\text{C}$  and at a relative humidity of 50 to 70 %. After conditioning, do not expose the blanket to air at different temperature or relative humidity for longer than 5 min before testing. Keep the fire blanket in a sealed plastic bag or other conditioning container until testing if it is necessary to transport it any distance to the test site.

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F15 on Consumer Products and is the direct responsibility of Subcommittee F15.46 on Fire Suppression Towels.

Current edition approved April 1, 2013. Published August 2013. Originally approved in 1999. Last previous edition approved in 2005 as F1989 – 05. DOI: 10.1520/F1989-05R13.

4.2.2 Store fire blanket for testing in their containers, or in the recommended storage condition for 24 h immediately prior to the testing for conformity with the requirements of Section 4.

4.2.3 Except where otherwise specified, tests shall be carried out at  $20 \pm 10^\circ\text{C}$ .

4.3 General Tests:

4.3.1 Flexibility Test—Blankets shall be capable of being rolled without permanent deformation along any axis completely around a 50-mm diameter bar.

4.3.2 Ease of Removal Test—Cooking fire suppression blankets shall be designed and located in such a way that the user can remove, unfold, and make ready for use in not more than 4 s. The force required to remove the fire blanket from its container (if used) shall not exceed 80 N.

4.4 Electrical Resistance Test:

4.4.1 Principle—The electrical resistance of the fire blanket is measured between a negative electrode formed by a steel or aluminum-topped table and a flat rectangular conducting positive electrode.

4.4.2 Apparatus:

4.4.2.1 Table, with a steel or aluminum top.

4.4.2.2 Megohmmeter, 500 V, dc.

4.4.2.3 Flat Rectangular Conducting Positive Electrode, 450 by 150 mm, total mass of 5 kg (including metal base, backing support and insulating handle (see Fig. 1).

4.4.3 Procedure—Arrange the apparatus as shown in Fig. 1. Lay the fire blanket flat on the table and zero and operate the megohmmeter in accordance with the manufacturer's instructions.

Move the instrument and the fire blanket as necessary, then check the whole surface area of the blanket. Test three cooking fire suppression blankets.

4.4.4 Interpretation of Results—A fire blanket is considered to be in conformance with this specification if the electrical resistance of the fire blanket is not less than 1 MΩ at any point.

4.5 Fire Performance Tests:


4.5.1 Volatile Liquid Test Fires:

4.5.1.1 Fuel—The fuel shall be an aliphatic hydrocarbon of initial boiling point not less than  $88^\circ\text{C}$  and final boiling point not more than  $105^\circ\text{C}$ . It is not necessary to use fresh fuel for each test provided that the initial fuel temperature is  $20 \pm 5^\circ\text{C}$ .

4.5.1.2 Tray Dimensions and Quantity of Fuel—The dimensions of the welded 2-mm sheet steel circular cylindrical trays are given in Table 1.

4.5.1.3 Siting—Position the test tray on a 0.8-m high horizontal metal table, not smaller than the fire blanket to be tested and between 1.45 and 1.8 m square, equidistant from two opposite sides and so that the distance from one of the other two sides (Side (a)) to the far edge of the tray is  $900 \pm 5$  mm (see Fig. 2). Place the table in a room free from drafts, with sufficient ventilation to allow the fire to develop freely and to remove products of combustion. Ensure that the ambient temperature is between 10 and  $30^\circ\text{C}$ .

4.5.1.4 Procedure—Place in the tray sufficient water (half the fuel volume) to give an average depth of 15 mm. This is to counter any irregularities in the base. Place the fuel in the tray. After ignition, allow the fire to burn freely for 1 min, then apply the fire blanket under test as symmetrically as possible to

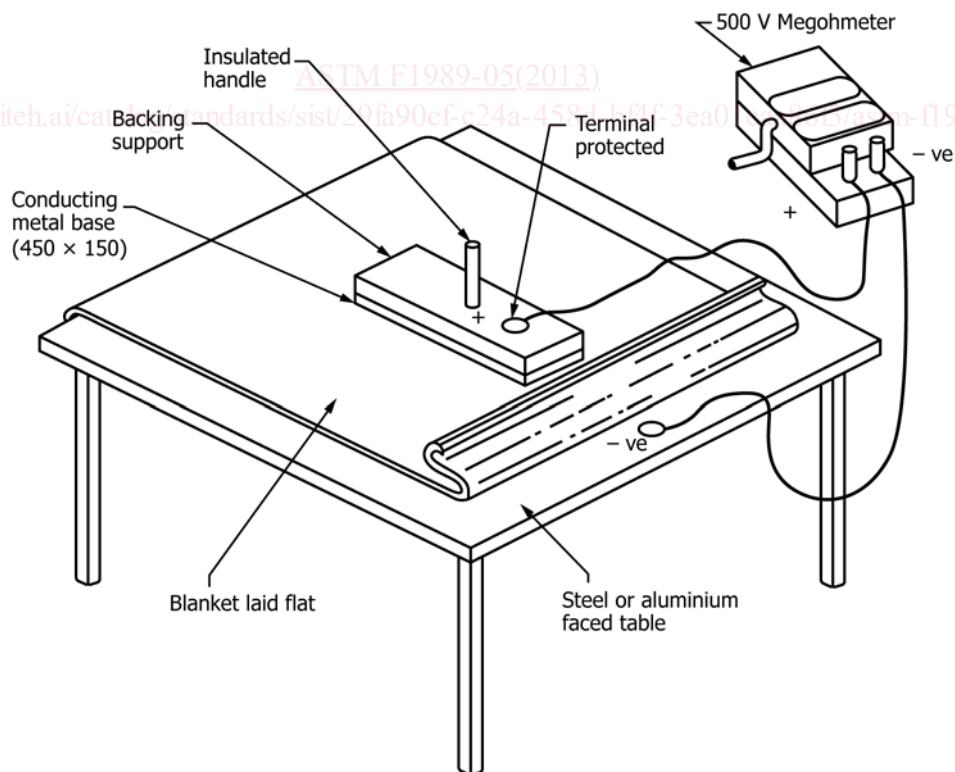

NOTE 1—All dimensions are in millimetres.

FIG. 1 Typical Arrangement for the Electrical Test