

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
24487

ISO/TC 130

Secretariat: SAC

Voting begins on:
2023-09-14

Voting terminates on:
2023-11-09

Graphic technology — Processless lithographic plates — Evaluation methods for characteristics and performance

Titre manquant

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/FDIS 24487](https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487)

<https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 24487:2023(E)

© ISO 2023

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 24487

<https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test procedure	2
4.1 General.....	2
4.2 Test environment.....	2
4.3 Plate imaging.....	3
4.3.1 General.....	3
4.3.2 Colour test form.....	3
4.3.3 Abrasion and scratch resistance test form.....	4
4.3.4 Image visibility test form.....	5
4.4 Pre-dampening amount.....	6
4.5 Pre-inking amount.....	6
4.6 Ink selection.....	6
4.7 Substrate selection.....	7
4.8 Fountain solution.....	7
4.9 Press preparation and control.....	7
4.9.1 Press preparation print run.....	7
4.9.2 Reference printing aim values.....	8
4.10 Printing method.....	8
4.11 Plate exposure to light.....	8
5 Assessment methods	8
5.1 General.....	8
5.2 On-press development.....	9
5.2.1 Number of sheets required for on-press development.....	9
5.2.2 Assessment of non-image area.....	9
5.2.3 Assessment of solid area.....	10
5.2.4 Assessment of intermediate tones.....	11
5.3 Abrasion resistance.....	11
5.4 Scratch resistance.....	11
5.5 Resistance to toning.....	13
5.6 Chemical resistance.....	15
5.6.1 General.....	15
5.6.2 Rub test.....	16
5.6.3 Drop test.....	16
5.7 Plate performance for stop and restart.....	16
5.8 Image visibility.....	17
5.9 Run length.....	17
6 Reporting requirements	19
Annex A (informative) Examples of measurement method and results	20
Annex B (informative) Example of evaluation results and classification	34
Annex C (informative) Examples of quality grade reporting	36
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 130, *Graphic technology*.

This first edition of ISO 24487 cancels and replaces ISO 24487-1:2021, which has been technically revised.

The main changes are as follows:

- the title and ISO number have been changed to remove the part number;
- the scope has been expanded to include evaluation points both specific to processless indicator and those common to the conventional indicator:
 - scratch resistance (see [5.4](#), [A.7](#) and [C.3](#));
 - image visibility (see [5.8](#), [A.8](#) and [C.7](#));
 - run length (see [5.9](#), [A.9](#) and [C.8](#))
- new terms have been added to [Clause 3](#).

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Processless plates represent a simple way to prepare plates in prepress. Once a plate has been imaged, it is mounted directly on the press where the plate coating is removed on start-up of the press. This approach eliminates the plate processor, associated chemistry, energy required to power the processor, water, and waste from plate preparation.

Perceived benefits of processless plates include ease of use and improved speed of production compared to traditional plate preparation systems since there is no need for a plate processor or finishing unit. Processless plates are mounted directly on press once imaged. Since costs associated with processors and finishing units, including developer and cleaning solution, time and labour are eliminated, printing using processless plates is perceived as a low-cost method.

The unique characteristic of processless plates is on-press development. After the exposure process by computer to plate (CTP) exposing equipment, the non-image area of the photosensitive layer is physically removed along with the ink and the fountain solution of the press.

The removal procedure is as follows.

- When the press is started, fountain solution and ink are applied. The fountain solution permeates the unexposed (non-image) area of the photosensitive layer. The unexposed photosensitive layer is then peeled from the base material by the tack of the printing ink.
- This peeled photosensitive layer is finely dispersed into the ink which is discharged on paper from the press in the usual way. Parts of the peeled layer are also discharged into the fountain solution.

This document specifies evaluation methods for lithographic plate characteristics, on press development performance, usability and print image quality. These evaluation methods are primarily intended for processless lithographic plates but some can be used for the evaluation of all classes of lithographic plate, however, it should be noted that quality and performance may be significantly affected by the development process and its stability. [ISO/FDIS 24487](https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487)

<https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487>

Graphic technology — Processless lithographic plates — Evaluation methods for characteristics and performance

1 Scope

This document applies to processless lithographic plates and specifies evaluation methods for lithographic plate characteristics, on-press development performance, usability and print image quality.

It specifies measurement conditions for materials and equipment and provides guidelines for the selection of suitable processless lithographic plates by a printing organization and requirements for comparative assessment tests.

The assessment of waterless lithographic plates is out of scope of this document.

NOTE Some of these methods can be used for the evaluation of all classes of lithographic plate.

This document specifies measurement conditions for materials and equipment and provides guidelines for the selection of suitable processless lithographic plates by a printing organization and requirements for comparative assessment tests.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2846-1, *Graphic technology — Colour and transparency of printing ink sets for four-colour printing — Part 1: Sheet-fed and heat-set web offset lithographic printing*

ISO 12647-2, *Graphic technology — Process control for the production of half-tone colour separations, proof and production prints — Part 2: Offset lithographic processes*

ISO 13655, *Graphic technology — Spectral measurement and colorimetric computation for graphic arts images*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

processless plate

plate loaded directly on to a printing press following exposure without any intermediate processing step other than mechanical processes such as plate punching and bending

Note 1 to entry: Intermediate processing steps typically include plate development, cleaning, fixing (or desensitization) and other treatments.

Note 2 to entry: Strictly speaking, these plates are 'processed' on press using the press fountain solution and ink.

3.2
pre-dampening amount

fountain solution amount used to wet plates prior to printing

Note 1 to entry: The pre-dampening step is part of the printing process.

3.3
pre-inking amount

ink amount applied to plates prior to printing

3.4
plate tone value

percentage area coverage for process and spot colour scales on the printing plate

3.5
printed tone value

apparent intensity of a printed single colour scale or 3-colour neutral

Note 1 to entry: Applies to density tone value, colour tone value, near-neutral CMY tone value.

Note 2 to entry: Adapted from ISO 12647-2.

4 Test procedure

4.1 General

Offset printing machines in use today differ in physical structure, fountain technology and ink delivery systems. The test conditions in this document are designed to be practical and to show significant differentiation between performance of different processless plate technologies.

Test conditions have been chosen to control key factors that have an impact on processless plates performance. <https://standards.iteh.ai/catalog/standards/sist/260c5907-1adc-4636-9c9f-bd2aed0cee0e/iso-fdis-24487>

Two categories of testing are anticipated by this document.

- a) Individual test: testing by a printer who wishes to choose the most suitable plate for his purpose and for this category of test, the production methods and materials used for testing should be those used by the printer for print production.
- b) Comparative test: scientific testing to allow the performance of printing plates to be compared to one another and for this category, the testing requires the use of specified test materials and methods which in some cases may be specified by the press or plates manufacturer.

Unless explicitly indicated, test procedures described in this document may be used for both individual testing and comparative testing.

4.2 Test environment

When comparative testing is conducted, the following conditions shall apply. When individual testing is conducted the temperature and humidity should be held constant and as close to these values as is possible.

The temperature of the printing room shall be $24\text{ °C} \pm 2\text{ °C}$.

The relative humidity of the printing room shall be $(55 \pm 10)\text{ \% RH}$.

Plates should be kept in the test environment for a minimum of four hours for single packs (12 hours for bulk material) before imaging and subsequent testing is carried out. Plates should not be exposed to light during this period.

4.3 Plate imaging

4.3.1 General

Printing plates shall be prepared to include the following content. Additional inked content shall be added in such a way as to ensure approximately equal inking across the plate of between 20 % to 40 % coverage.

When printing CMYK, all test forms shall be prepared and printed to meet the requirements of ISO 12647-2 for solid patches. The plate tone value should be adjusted so that the printed tone value is the same for all plates being evaluated.

Additional content necessary for process control should be added as required.

When conducting individual testing, a halftone ruling and paper type that are typically used by the printer should be selected, and these same selections should be used when testing multiple times.

When comparative testing is performed, a half-tone screen ruling of 60 cm⁻¹ (approximately 150 lines per inch) should be used.


Additional strips with different screen rulings and area coverage may be added and where these are added, details should be provided in the report. A paper conforming to the requirements for the reference print substrate should be used and the paper used shall be identified in the test report.

4.3.2 Colour test form

A CMYK test form with a set of rectangular or square patches shall be prepared comprising: a solid (100 %) patch in each process colour, and patches of intermediate tones from 10 % to 70 % tone value in each process colour. A region of at least 100 mm × 150 mm of the sheet shall be left blank (the non-image area).

Each patch should have a minimum size of 10 mm × 10 mm and patches should be spaced by a minimum of 5 mm. Where visual assessment is required, patches should have a minimum size of 40 mm × 40 mm. The plate image area shall have a large region of approximately half the total image size where no marks are imaged. An example test form is shown in [Figure 1](#).

NOTE 1 The minimum size for each patch has been specified so that the patches can be measured easily. The minimum spacing of patches is required to allow visual assessment of toning between printed elements.

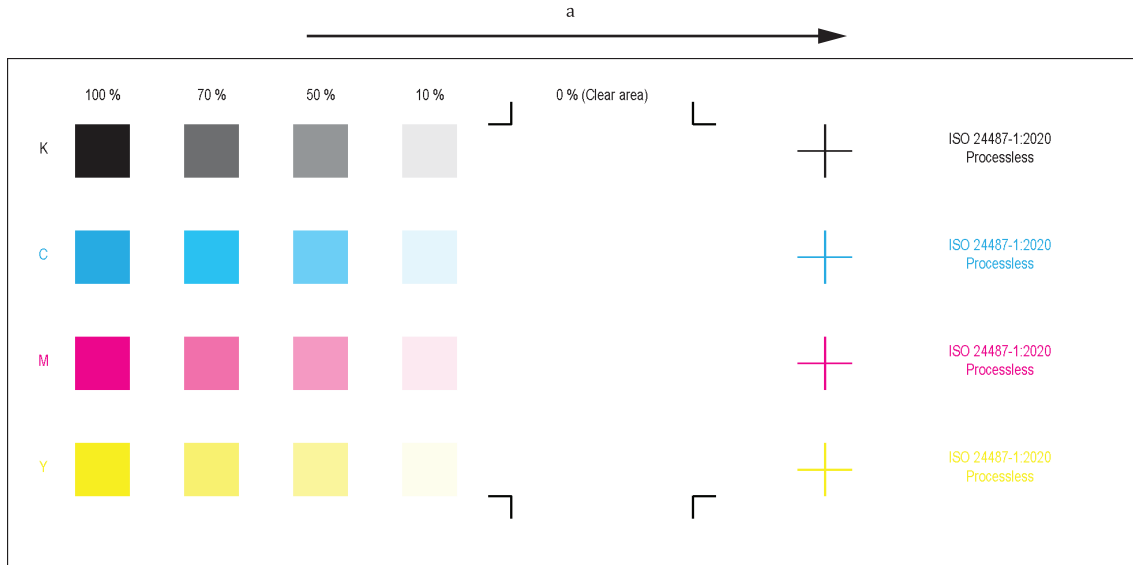

a Preferred printing direction.

Figure 1 — Example CMYK test form

The test form should be imaged in several positions and with different orientations. When oriented in the press direction, it shall be aligned with the preferred printing direction as indicated.

NOTE 2 Where a subset of the process inks is to be tested, not all plates need to be imaged. For example, to test the performance with cyan ink, only the cyan plate needs to be imaged.

The plates shall be exposed as recommended by the manufacturer for optimum image sensitivity and should be adjusted to ensure that the halftone dot area on plate corresponds to patch tone value. If direct measurements on plate are not possible, indirect measurement via the dot% on the print should be made.

When printing is not 4-colour (CMYK), for example monochrome printing or printing of spot inks or varnish, a test chart comprising the set of process colours generally used in print production shall be used.


4.3.3 Abrasion and scratch resistance test form

For abrasion resistance tests, an abrasion and scratch test form comprising seven sets of the patches shall be imaged. This test is generally performed on the black plate, but the same monochrome image may also be used to image the cyan, magenta or yellow plate.

For scratch tests, scratches are applied to the plate after it has been imaged.

An example of a suitable test form is shown in [Figure 2](#). Sets of patches shall be separated sufficiently to allow abrasion and scratch resistance testing to be performed on one set without affecting any other set.

This test form may also be used when testing chemical resistance.

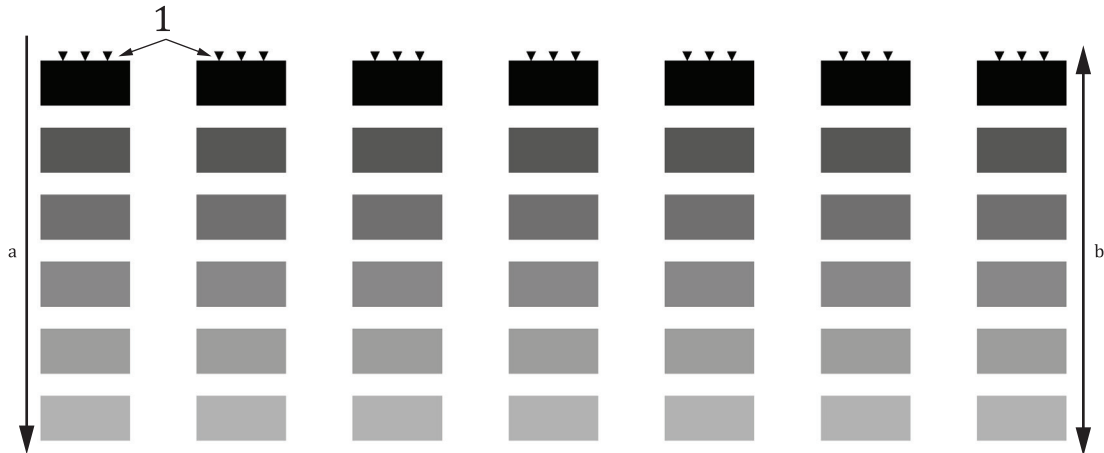**Key**

- 1 scratch markers
- a Preferred printing direction.
- b Abrasion and scratch direction.

Figure 2 — Example abrasion and scratch resistance test form

4.3.4 Image visibility test form

When using processless plates, it is important to be able to identify the colour separation imaged on the plate. This is usually done by marking each plate with text that uniquely identifies the colour separation. The text imaged as part of the colour test form in [Figure 1](#) may be used for this purpose. A more extensive text element D is shown in [Figure 3](#).

Where it is important to be able to see more information on the printing plate, the test form in [Figure 3](#) should be used. This form is designed to test image contrast and resolution.

An example of a test chart that may be used to assess visibility of content is shown in [Figure 3](#). This chart comprises three sections labelled A, B, C and D. Sections A, B and D are used for visual assessment.

Section A comprises 20 sets of concentric square elements each with a different tone value from 100 % (element 1) to 5 % (element 20) decreasing by 5 % at each step designed to test visual contrast.

Section B comprises 20 sets of concentric square elements each with a different stroke width from 4 points (element 1) to 0,2 points (element 20) decreasing in 0,2 points at each step designed to test visual resolution.

Section C is not used for visual evaluation. Each patch has the same tone value as the element with the same number in Section A and can be used when a tone value measurement is needed.

Section D comprises 11 lines of text each with a different point size from 6 to 11 points in 0,5 points intervals designed to test readability of small text elements.

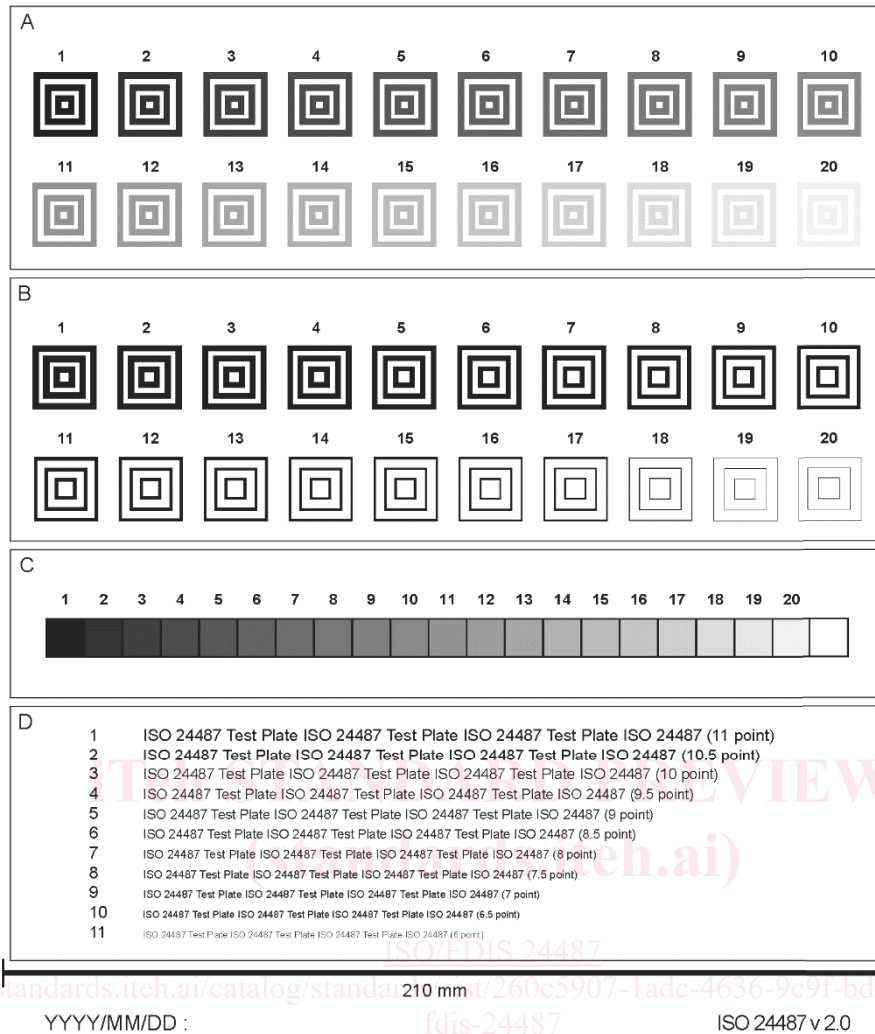


Figure 3 — Example image visibility test form

4.4 Pre-dampening amount

The pre-dampening amount should be as small as possible and shall be no greater than the recommended value from the press vendor.

4.5 Pre-inking amount

The pre-inking amount shall be set to the recommended value from the plate manufacturer or press vendor.

4.6 Ink selection

When individual testing is performed to determine whether the plate is suitable for a printing operation, the inks used for testing should be the same as are typically used for production.

When comparative testing is performed, inks conforming to ISO 2846-1 shall be used.

For the evaluation of resistance to toning, a low viscosity and low tack ink with a large content of varnish should be used.

Details of the inks used shall be reported.

NOTE Low viscosity and low tack inks show more differences when comparing processless plates.

4.7 Substrate selection

When individual testing is performed to determine whether the plate is suitable for a printing operation, the substrates used for testing should be the same as are typically used for production.

When comparative testing is performed, paper for the appropriate ISO 12647-2 printing condition shall be used. Where possible, an environmentally friendly paper such as recycled paper and FSC certified paper should be used.

Details of the substrate used shall be reported.

4.8 Fountain solution

When individual testing is performed to determine whether the plate is suitable for a printing operation, the fountain solution used for testing should be the same as are typically used for production.

When comparative testing is performed, a fountain solution recommended by the press manufacturer shall be used. Where possible, an environmentally friendly fountain solution should be used. A list of fountain concentrates tested by Fogra and approved by the printing press manufacturers is given in Reference [2].

Dilution of the fountain solution shall be made as recommended by the printing press manufacturer.

The fountain solution and dilution amount used shall be reported.

4.9 Press preparation and control

4.9.1 Press preparation print run

The number of sheets required for plate development depends on the press condition when the print run starts and can vary by more than a factor of two. To avoid this problem, two sets of identical plates shall be prepared. The first set shall be used for a press preparation print run of at least 300 sheets during which ink key settings are established and the second set shall be used for the test print run.

During the press preparation press run, the press settings should be established according to the press and plate manufacturer's recommendation. The blanket shall then be washed and dried before the plates to be tested are fitted to the press and the testing begins.

NOTE The start-up procedure according to the plate manufacturer's and the press manufacturer's recommendation can be different for each press or plate.

The press shall be adjusted to achieve the printing aims within the deviation tolerances as specified in ISO 12647-2 for the solid cyan, magenta, yellow and black process colorants and all patches are within the variation tolerances.

Printing speed shall be the speed generally used for print production or a standard setting as recommended by the press manufacturer. Press speed shall be reported.

Other press parameters such as fountain solution cooling temperature, ink roller cooling temperature, blanket, water supply system, slip ratio between dampening form roller and plate cylinder should be operated as recommended by the press manufacturer. In cases where the press is operated differently from that recommended by the manufacturer, the differences shall be reported.

Where available, press manufacturer recommended programs for processless plates should be used. Where no such recommendation exists, the same press condition as is used for printing using conventional plates shall be used.