

ISO/FDIS_14635-1:2023(E)

ISO/TC_60/SC_2

Secretariat: DIN

Date: 2023-01-25/03-03

Gears — FZG test procedures —

Part 1: FZG test method A/8,3/90 for relative scuffing load-carrying capacity of oils

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Engrenages — Méthodes d'essai FZG —

ISO/FDIS 14635-1

<https://standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-14635-1>

Partie 1: Méthode FZG A/8,3/90 pour évaluer la capacité de charge au grippage des huiles

FDIS stage

ISO/FDIS 14635-1:2023(E)

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
E-mail: copyright@iso.org
Website: www.iso.org

Published in Switzerland

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/FDIS 14635-1](https://standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-fdis-14635-1)

<https://standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-fdis-14635-1>

Contents

Forewordv

Introductionvii

Part 1: FZG test method A/8.3/90 for relative scuffing load-carrying capacity of oils1

1 Scope1

2 Normative references1

3 Terms and definitions1

4 Brief description of method2

4.1 General principle2

4.2 Precision5

5 Test materials5

5.1 Test gears5

5.2 Cleaning fluid5

6 Apparatus9

6.1 FZG spur-gear test rig9

6.2 Heating device10

6.3 Revolution counter11

7 Preparation of apparatus11

8 Test procedure11

9 Reporting of results12

Annex A (informative) Typical FZG test report sheet14

Annex B (informative) Checklist for maintenance of FZG gear test rig16

Bibliography22

Foreword — v

Introduction — vii

1 — Scope — 1

2 — Normative references — 1

3 — Terms and definitions — 1

4 — Brief description of method — 2

4.1 — General principle — 2

4.2 — Precision — 4

5 — Test materials — 4

5.1 — Test gears — 4

5.2 — Cleaning fluid — 4

6 — Apparatus — 7

6.1 — FZG spur gear test rig — 7

6.2 — Heating device — 8

6.3 — Revolution counter — 8

7 — Preparation of apparatus — 8

8 — Test procedure — 9

ITel STANDARD PREVIEW
 (standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/92411a5c-50cf-47a1-888a-6fccc46a5a9a/iso-fdis-14635-1>

ISO/FDIS 14635-1:2023(E)

~~9 Reporting of results 9~~

~~Annex A (informative) Typical FZG test report sheet 11~~

~~Annex B (informative) Checklist for maintenance of FZG gear test rig 12~~

~~B.1 How to recognize malfunction 12~~

~~B.1.1 Distribution of scuffing marks 12~~

~~B.1.2 Tooth contact pattern 12~~

~~B.1.3 Tests with reference oil 12~~

~~B.1.4 Other indications 12~~

~~B.2 Parts that need maintenance 12~~

~~B.2.1 Test gear box 12~~

~~B.2.1.1 Shafts 12~~

~~B.2.1.2 Bearings 13~~

~~B.2.1.3 Keys 13~~

~~B.2.1.4 Spacer rings 13~~

~~B.2.1.5 Gear box and front cover 13~~

~~B.2.1.6 Seals 13~~

~~B.2.2 Connecting shafts and flanges 13~~

~~B.2.2.1 Load coupling 13~~

~~B.2.2.2 Torque measuring device 13~~

~~B.2.2.3 Load coupling support bearing 13~~

~~B.2.2.4 Torsion shaft 14~~

~~B.2.2.5 Flanges 14~~

~~B.2.3 Slave gear box 14~~

~~B.2.3.1 Slave gears 14~~

~~B.2.3.2 Lubrication 14~~

~~B.2.4 Other parts 14~~

~~B.2.4.1 Heating 14~~

~~B.2.4.2 Flexible coupling blocks 14~~

~~B.2.4.3 Motor 14~~

~~B.3 Approximate time intervals 14~~

~~Bibliography 16~~

STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 14635-1

standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-fdis-14635-1

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 60, *Gears*, Subcommittee SC 2, *Gear capacity calculation*.

This second edition cancels and replaces the first edition (ISO 14635-1:2000), of which it constitutes a minor revision in accordance with ISO Directives, Part 1. The changes are as follows:

The main changes are as follows:

- ~~ISO 1328-1:1995, *Cylindrical gears — ISO system of accuracy — Part 1: Definitions and allowable values of deviations relevant to corresponding flanks of gear teeth*¹~~ has been dated as this document still refers to accuracy grade;
- ~~replacement of ISO 4287, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters*~~ which has been withdrawn and replaced by ISO 21920-2, *Geometrical product specifications (GPS) — Surface texture: Profile — Part 2: Terms, definitions and surface texture parameters*;
- ~~replacement of ISO 4964, *Steel — Hardness conversions*~~ which has been withdrawn and similar information can be found in ISO 18265, *Metallic materials — Conversion of hardness values*;
- ~~updating~~ replacement of some bibliography entries ~~which were withdrawn~~, and changes from dated to undated references ~~where no specific reason requires the dated reference (see Bibliography footnotes)~~;
- ~~Clause 5.2, subclause 5.2~~, wording harmonized ~~with~~ with the ISO 14635 series;
- ~~Table 1, Table 1~~, description "~~pitch line circumferential speed (v_w)~~" has been replaced by "circumferential velocity at the pitch line" to harmonize the wording with the ISO 6336-series;

¹ Cancelled and replaced by ISO 1328-1:2013.

ISO/FDIS-14635-1:2023(E)

- ~~Table 4; Table 4~~, insertion of lines "Direction of rotation and Test lubrication volume" to conform to be compliant with given the information ~~within~~ in the ISO 14635 series.

A list of all parts in the ISO 14635 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html ~~www.iso.org/members.html~~.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 14635-1

<https://standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-fdis-14635-1>

Introduction

The types of gear failures which can be influenced by the lubricant in use are scuffing, low-speed wear and the gear-surface fatigue phenomena known as micro- and macropitting. In the gear design process, these gear damages are taken into consideration by the use of specific lubricant and service-related characteristic values. For an accurate, field-related selection of these values, adequate lubricant test procedures are required. The FZG² test procedures described in this [document](#) and ~~other parts of ISO 14635-2 and ISO 14635-3~~, can be regarded as tools for the determination of the lubricant-related characteristic values to be introduced into the load-carrying capacity calculation of gears.

FZG test method A/8,3/90 for the relative scuffing load-carrying capacity of oils described in this ~~part of ISO 14635~~ [document](#) is typical for the majority of applications in industrial and marine gears. ISO 14635-2 is related to the relative scuffing load-carrying capacity of oils of very high EP properties, as used for the lubrication of automotive driveline components. Other FZG test procedures for the determination of low-speed wear, micro- and macropitting load-carrying capacity of gears are ~~already in a late state of development. They can intended to~~ be added ~~later to the~~ ISO 14635 series as further parts.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/FDIS 14635-1](#)

<https://standards.iteh.ai/catalog/standards/sist/924f1a3e-50ef-47a4-888a-6fccc46a5a9a/iso-fdis-14635-1>

Gears — FZG test procedures —

Part 1: FZG test method A/8,3/90 for relative scuffing load-carrying capacity of oils

1 Scope

This document specifies a test method based on a FZG³ four-square test machine to determine the relative load-carrying capacity of lubricating oils defined by the gear-surface damage known as scuffing. High surface temperatures due to high surface pressures and sliding velocities can initiate the breakdown of the lubricant films. This test method can be used to assess such lubricant breakdown under defined conditions of temperature, high sliding velocity and stepwise increased load.

NOTE This method is technically equivalent to ASTM D 5182-97⁴, ~~DIN 51354-1 and DIN 51354-2~~, ~~IP 334/90⁵~~¹⁹ and CEC L-07-A-95.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1328-1:1995², *Cylindrical gears — ISO system of accuracy — Part 1: Definitions and allowable values of deviations relevant to flanks of gear teeth*

~~ISO 5725-2, Accuracy (trueness and precision) of measurement methods and results — Part 2: Basic methods for the determination of repeatability and reproducibility of a standard measurement method~~

ISO 18265, *Metallic materials — Conversion of hardness values*

ISO 21920-2, *Geometrical product specifications (GPS) — Surface texture: Profile — Part 2: Terms, definitions and surface texture parameters*

ASTM D 235, *Specification for Mineral Spirits (Petroleum Spirits) (Hydrocarbon Dry Cleaning Solvent)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 scuffing load-carrying capacity

(of a lubricant) maximum load which can be sustained under a defined set of conditions

Note 1 to entry: For examples of failure see ~~Figure 1~~ Figure 1.

³FZG = Forschungsstelle für Zahnräder und Getriebebau, Technische Universität München (Gear Research Centre Technical University, Munich), Boltzmannstraße 15, D-85748 Garching, Germany.

⁴ASTM D 5182-97 has been replaced by ASTM D 5182-19.

⁵DIN 51354-1 and DIN 51354-2 have been replaced by DIN ISO 14635-1.

⁶IP 334/90 has been withdrawn.

⁷Cancelled and replaced by ISO 1328-1:2013.

Field Code Changed

Field Code Changed

ISO/FDIS 14635-1:2023(E)

Note 2_to_entry:-Scuffing is a particularly severe form of damage to the gear-tooth surface in which seizure or welding together of areas of tooth surface occur, due to absence or breakdown of a lubricant film between the contacting tooth flanks of mating gears, typically caused by high temperature and high pressure. Scuffing is most likely when surface velocities are high. Scuffing can also occur at relatively low sliding velocities when tooth-surface pressures are high enough either generally or, because of uneven surface geometry and loading, in discrete areas.

Note 3_to_entry:-Risk of scuffing damage varies with the properties of gear materials, the lubricant used, the surface roughness of tooth flanks, the sliding velocities and the load. Consequences of scuffing of high-speed gears include a tendency to high levels of dynamic loading due to increase of vibrations, which usually leads to further damage by scuffing, pitting or tooth breakage.

3.2

FZG test condition A/8,3/90

test condition where A is the particular tooth form of the test gears, according to [Table 1; Table 1](#), 8,3 is the speed at the pitch circle, in metres per second, and 90 is the initial oil temperature, in degrees Celsius, from load stage 5 and onward in the oil sump

Note 1_to_entry:-The direction of the rotation of the gears is shown in [Figure 3; Figure 3](#).

3.3

failure load stage

load stage in which the summed total width of scuffing damage on the active flank area of the 16 pinion teeth exceeds one gear-tooth width, i.e. 20 mm

Note 1_to_entry:-Examples of flank damages for the purpose of the test method are shown in [Figure 1; Figure 1](#).

4 Brief description of method

4.1 General principle



A set of test gears as defined in [Clause 5, Tables 1; Clause 5, Tables 1 and 2; 2](#), is run with the test lubricant at constant speed for a fixed number of revolutions using dip-lubrication mode. Loading of the gear teeth is increased in steps outlined in [Table 3; Table 3](#). Beginning with load stage 5, the initial oil temperature is controlled between (90 ± 3) °C. During the test run of each load stage, the oil temperature is allowed to rise freely. After load stage 4, the pinion tooth flanks are inspected for surface damage at the end of each load stage and any changes in appearance are noted. A test is considered complete when either the failure criteria has been met or when load stage 12 is run without meeting the failure criteria.

It is the responsibility of the operator to ensure that all local legislative and statutory requirements are met.



NOTE It has been assumed by the compilers of this test method that anyone using the method will either be fully trained and familiar with all normal engineering and laboratory practice, or will be under the direct supervision of such a person.

WARNING — When the rig is running, there are long loaded shafts and highly stressed test gears turning at high speed and precautions shall be taken to protect personnel.


Protection from noise is also highly recommended.

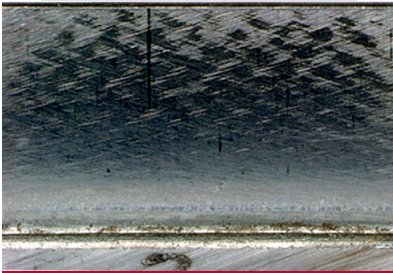


a) No failure marks

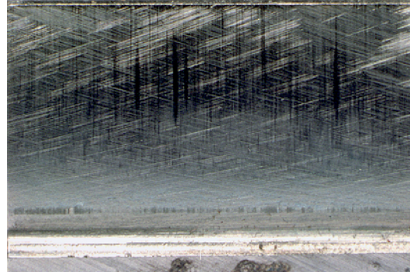

b) No failure marks

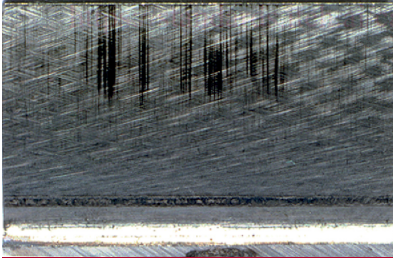

c) Approx. 5 mm failure marks

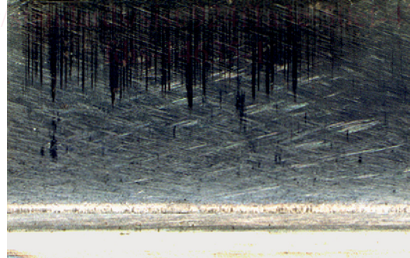


d) Approx. 15 mm failure marks

STANDARD PREVIEW
(standards.iteh.ai)


ISO/FDIS 14635-1

atalog


a4-888a-6fccc46a5a9a/iso-

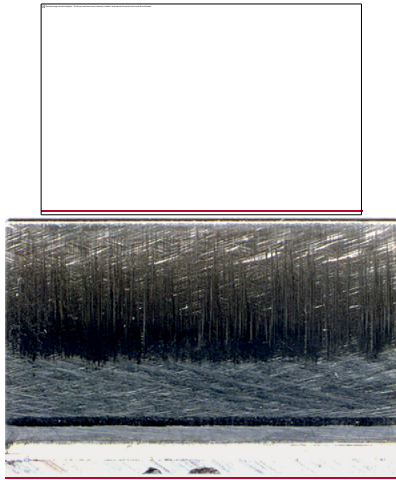

e) 20 mm failure marks

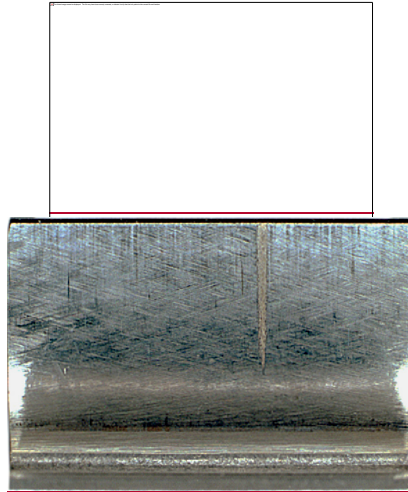

f) Approx. 2 mm failure marks

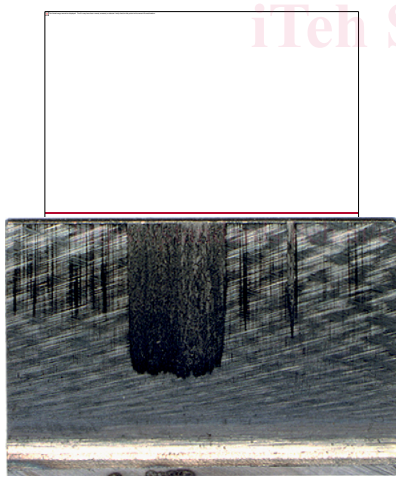

g) Approx. 6 mm failure marks



h) 20 mm failure marks

NOTE This figure describes the typical pinion tooth flank changes occurring in FZG tests. Changes in the original surface condition (criss-cross grinding) can be described by their physical appearance. One and the same type of flank damage can be described in different places in the world by using different terminology (e.g. "scuffing", "scoring" and "severe wear"). In order to avoid misinterpretation of the pinion tooth flank changes occurring during the test, typical examples of non-failure and failure are given.

PRODUCTION-NOTE The colours represented in the electronic file of this [part of ISO 14635 document](#) can be neither viewed nor printed as true representations. Only copies of this [part of ISO 14635 document](#) printed by ISO can be guaranteed to represent the true colours.

Figure 1 — FZG A-type gear-tooth face changes (flank damages)